

Factory Direct Sale 4 Strings Solar PV Combiner Box Solar DC1000V Array Box for Protect Solar System

Basic Information

- Place of Origin:
- Brand Name: Golden Electric /OEM Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949 GD-PV04 Model Number: • Minimum Order Quantity: 1 • Price: USD60-USD600 • Packaging Details: Carton/Pallet • Delivery Time: Peak Season Lead Time: more than 12 months Off Season Lead Time: within 15 workdays • Payment Terms: T/T, LC, PayPal, Western Union, Money Gram

5000/Month

China

Supply Ability:



Product Specification

Shell Protection Grade:	IP66					
• Brand:	Golden Electric /OEM					
Voltage:	1000V/1200V/1500V					
 Installation Method: 	Wall Mounting Type					
Structure Characteristic:	Plug-Push Module					
• Number Of Output Strings:	1					
Strings:	4					
Apply For:	Solar Panels System					
 Nominal Discharge Current: 20ka 						
Maximum Discharge Current:	40ka					
Voltage Protection Level:	1000V/1200V/1500V					
 Transport Package: 	Export Standard Packing					
Specification:	2/4/6/8/10/12/14/16/18/20/24/26/28/30					

Strings



Tue de me e dr.

More Images





California Or Material Or Overtainer Drand





Product Description

Product Description

GD-PV4/1 PV combiner box bus synthetic DC input of 4 PV components to 1 output. Each channel is with a fuse. Output side is equipped with lightning protection and circuit breaker. It greatly simplify input wiring of DC power distribution cabinet and inverter. Realize lightning protection, short circuit protection and grounding protection. PV combiner box divided into two types: intriligent box and non-intelligent box. Intelligent PV combiner box is equipped with monitoring unit, then detect input current of each string, detect inside temperature, detect lightning protection status, detect circuit breaker status and summarize output voltage and so on.

Design and configuration strictly accordance with the "Technical specification for photo-voltaic junction equipment" CGC/GF 037:2014.


IP65 protection grade.Provide users with a safe, brief, beautiful and applicable photo-voltaic system products.

The product adopts outdoor wall mounted type, which adapt to the harsh environment. In addition to the core components, the other can be customized by users requirements.

Product Parameters

Name	GD-PV4/1
	Electric parameter
System maximum dc voltage	1000
Maximum input current for each string	15A
Maximum input strings	1
Maximum output switch current	20A/32A
Number of inverter MPPT	Ν
Number of Output strings	1
L	ightning protection
Category of test	Il grade protection
Nominal discharge current	20kA
Maximum discharge current	40kA
Voltage protection level	3.8kV
Maximum continuous operating voltage Uc	1050V
Poles	3P
Structure characteristic	Plug-push module
	System
Protection grade	IP65
Output switch	DC isolation switch(standard)/ DC circuit breaker(optional)
Waterproof Connectors	Standard
PV dc fuse	Standard
PV surge protrctor	Standard
Monitoring module	optional
Preventing diode	optional
Box material	Metal
Installation method	Wall mounting type
Operating Temperature	-25°C~+55°C
Elevation of temperature	2km

Details Show:

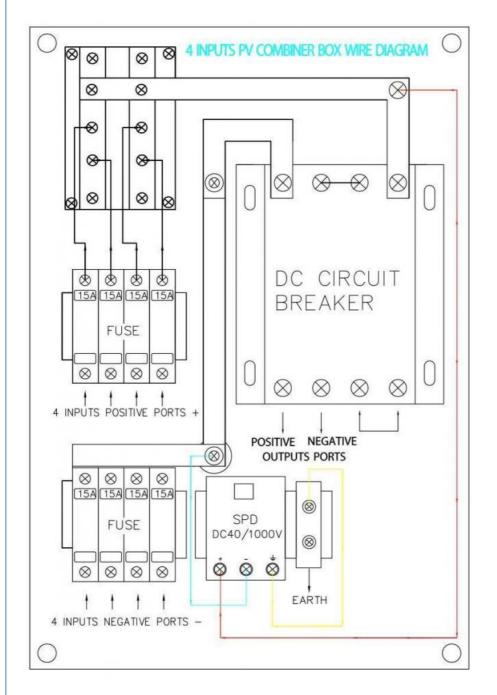

♦High reliability

With DC FUSE With DC Surge Protection Device With DC circuit breaker or DC load isolation switch.

Strong adaptability

IP65 design,waterproof,anti dust and anti ularaviolet. Strict test for high and low temperature,used widely/ The simple installation, the simplified system wiring, the convenient wiring. The box body is made of cold rolled steel and other metal materials.


♦Flexible configuration

Used for single crystal silicon solar modules, polycrystalline silicon solar modules, thin film solar modules. Current rating of the photovoltaic fuse, cicuit breaker, load isolation switch is modified.


Packing




Product Details

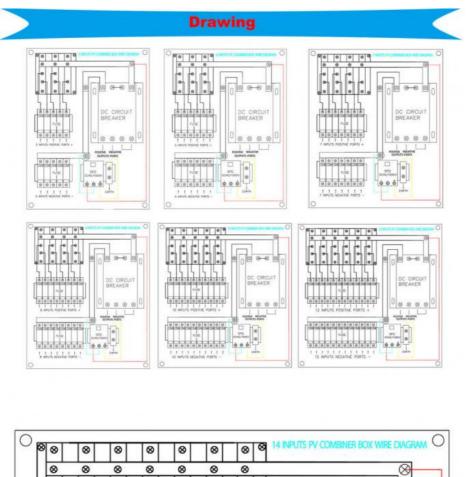

-								
8	®	•	®	*	 @	⊗ –		
8	8	8	8	8	8	88		
٦	4	4	41	41	4	41		
**	1	1	1010	100	1		DC CIR	CUIT

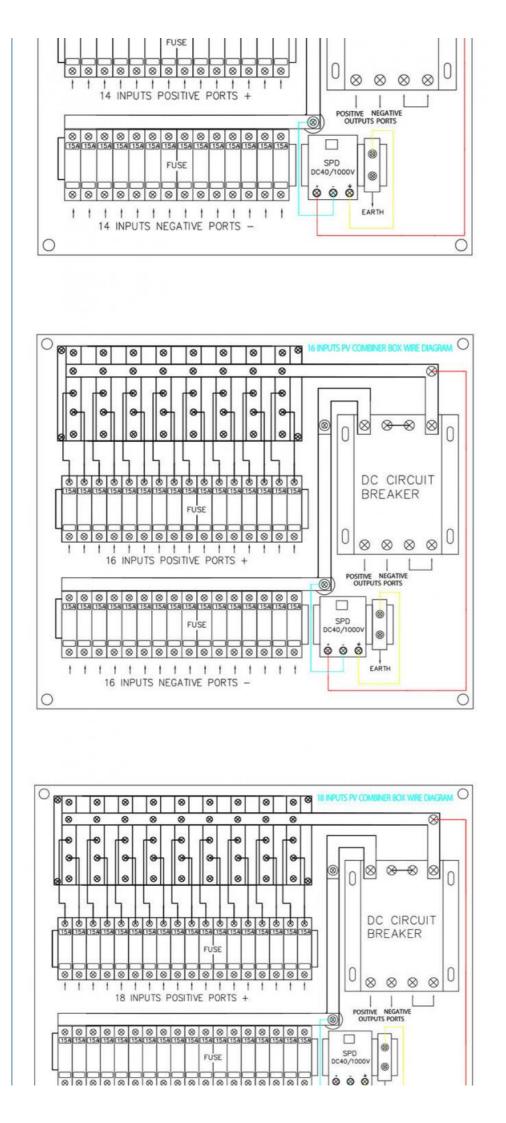

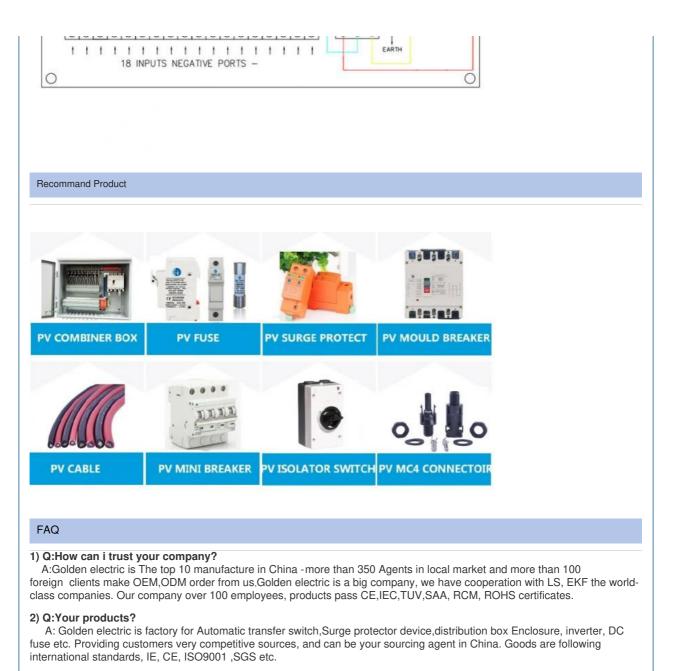

3) Q: After Sales Service?

A: We will provide the best After-sales Service

4) Q: What's the payment term?

A: Normally 100% T/T in advanced payment. If big order then about 50% advanced payment, balance before shipment.PAYPAL,WESTERN UNION,CASH for small order.

5) Q: Your address ?

A: Locates in Guangzhou province, China, welcome to visit us

6) Q:What's your contact information ?

Send your Inquiry Details in the Below, Click 'send" Now!! We will do our best to give you a perfect service.

