

# Cage 32A Solar DC Isolator Switch IP66 PC Class Double Power Transfer Switch

ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001,

Peak Season Lead Time: more than 12

LC, T/T, PayPal, Western Union

months Off Season Lead Time: within 15

## **Basic Information**

- Place of Origin:
- Brand Name: Golden Electric /OEM

China

IATF16949

workdays

5000/Month

1

- Certification:
- Minimum Order Quantity:
- Carton/Pallet Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



## **Product Specification**

• Run: Plug-In • Switching Mode: Single Throw-in • Structure Of Operating: Manual Golden Electric /OEM • Brand: DC Isolator Switch • Product Name: • Waterproof: IP66 • Current: 32A • Wiring: Upside Input, Downside Output • Working Temperature: -40 To +85 Degree Celsius Rated Insulation Voltage: 1500V Tightening Torque Terminal 1.2-1.8nm • Screws M4: • Pollution Degree: 2

4~10mm2

4~16mm2



# More Images

· Solid Or Standard:

• Flexible:







Our Product Introduction

### **Product Description**

Modular design, DC insulation voltage 1500V, compact structure, 2-4 poles optional

Strong installation, good sealing, installation can make the machine as a whole IP66 class

Adopt parallel wiring, aperture is bigger, install firm, flexible and convenient

High-speed "on-off" switching mechanism, using energy storage spring, fast switching, maximum switching time is less than 3ms

Contact self-cleaning design, reduce the resistance and energy consumption of DC switch, extend the life of switch

Imported UL94V-0 flame retardant material can work at full load in the range of -40°C~+70°C ambient temperature


Passed IEC / EN60947-3: 2009+A1+A2 test, the product has TUV, CE, CB, SAA certification

### Product Parameters

The following data are according to IEC/EN60947-3:2009+A1+A2, AS60947.3, Utilization category DC-PV2/DC-PV1	
Main Parameter	GD100R/120R-32(R)
Rated insulation voltage (Ui)	1500V
Rated thermal current (Ith)	32A
Rated impluse withstand voltage (Uimp)	8000
Rated short-circuit making capacity (lcw)	1000
Maximum cable cross sections(incl.jumper)	
Solid or standard	4-16mm <sup>2</sup>
Flexible	4-10mm <sup>2</sup>
Flexible (+multicore cable end)	4-10mm <sup>2</sup>
Torque	
Tightening torque terminal screws M4	1.2-1.8Nm
Tightening torque shell mounting screws ST4.2(304 stainless steel)	1.5-2.0Nm
Tightening torque knob screws M3	0.5-0.7Nm
Switching on or off Torque	0.9-1.3Nm
The wiring Torque on Base	1.1-1.4Nm
General parameters	
Knob positions	OFF at 9 hr, ON at 12 hr(Optional OFF at 12 hr, ON at 3 hr)
Mechanical life	10000
Number of DC poles	2 or 4 (6,8 optional)
Operation temperature	-40ºC to +86ºC
Storage temperature	-40ºC to +86ºC
Pollution degree	2
Overvoltage category	
IP rating of share and mounting nul	IP66

## Product Details



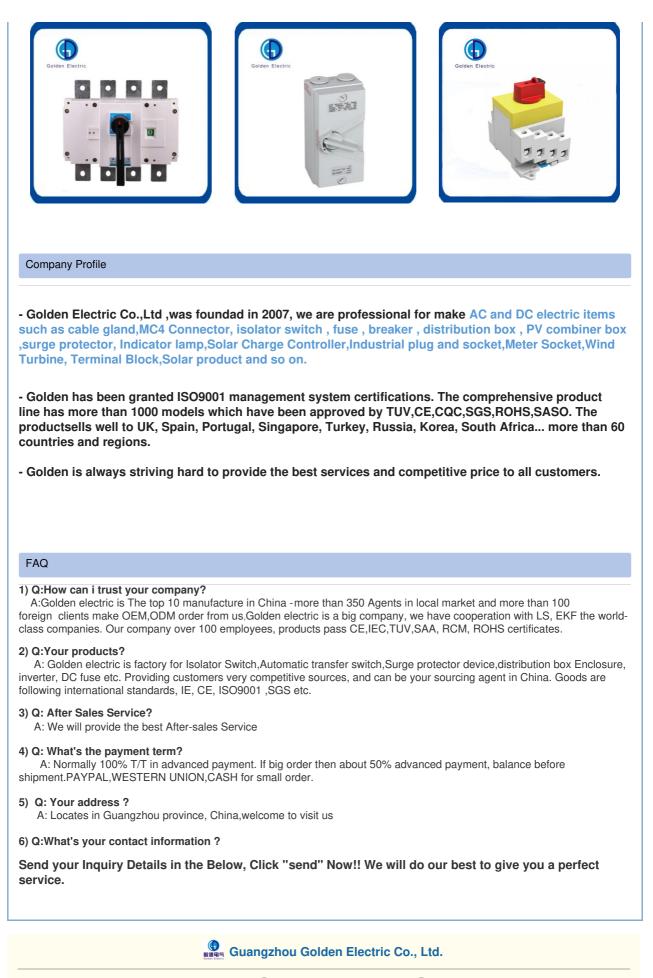

008618998498109

eva@china-golden.com.cn

Chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District, Guangzhou city,Guangdong province,China