

# IP67 Protection Degree Adaptor PV Connector 1500V/30A T4 4 in 1 for Solar Energy System

### **Basic Information**

- Place of Origin:
- Brand Name: Golden Electric /OEM ISO 9001, ISO 9000, ISO 14001, ISO 14000, Certification: ISO 20000, OHSAS/ OHSMS 18001, IATF16949 PV004-T4 Model Number: • Minimum Order Quantity: 1 Packaging Details: Carton/Pallet • Delivery Time: Peak Season Lead Time: more than 12 months Off Season Lead Time: within 15 workdays

5000/Month

LC, T/T, PayPal, Western Union

China

- Payment Terms:
- Supply Ability:



### **Product Specification**

Model NO.:	PV004-T4
<ul> <li>Product Name:</li> </ul>	T Branch Solar Connector
<ul> <li>Rated Voltage:</li> </ul>	1000V
Rated Current:	30A
<ul> <li>Insulation Material:</li> </ul>	PPO
<ul> <li>Protection Degree:</li> </ul>	IP67
Connector Type:	Adaptor
<ul> <li>Warranty:</li> </ul>	2 Years
<ul> <li>Transport Package:</li> </ul>	Standard Export Carton
• Trademark:	Golden Or Netural, Or Customer Bra
Origin:	China
HS Code:	8536690000
<ul> <li>Supply Ability:</li> </ul>	20000PCS/Month
Gender:	Male And Female

4 Pins

• Pin:



## More Images









### **Product Description**

#### Product Description

The solar extension cable is mainly used for the connection between PV modules and inverter (Controller). It can be produced according to different requirements.

We have a variety of connectors for photovoltaic systems. Line-to-Line types: PV004(30A), PV008(80A). Branch types: 2T1, 3T1, 4T1,T2,T3,T4,T5,T6. Special function connector PV004-D (with diode) and PV004-F(with Fuse).

#### **Product Features**



High Quality Raw Material PPO,PC

Approved by TUV and CE certification, high heat resistance, wear resistance, pollution resistance, strong toughness.

Tinned Plated Copper Inner Core

Open core, wear resistance, corrosion resistance, prevent rust.



High Strength Waterproof Ring

Dustproof, Waterproof, Protection degree IP67

Stable Self - Locking Structure

The joint adopts compression and fastening mode, the male and female head has self-locking structure to open and close freely .





#### Insulation Waterproof


Built-in high quality lock head, delicate, firm, sealed, insulating, to guide and prevent electric shock.


### **Product Parameters**

	Туре	PV004-T4
Rated Voltage 1000VDC	Rated Voltage	1000VDC

Rated impulse voltage	8000V
Rated insulation voltage	6000V
Rated Current	30A
Standard	EN 62852: 2015 IEC 62852(ed.1)
Protection Degree	IP67
Contact Resistance	≤0.5mΩ
Pollution Degree	2
Ambient Temperature	-40~+85ºC
Cable cross section area	2,5 mm² 4,0mm² 6,0 mm²
Cable outer diameter	4.0-7.0mm
Insulation Material	PC /PPO
Flame Class	UL94-V0

Product Details

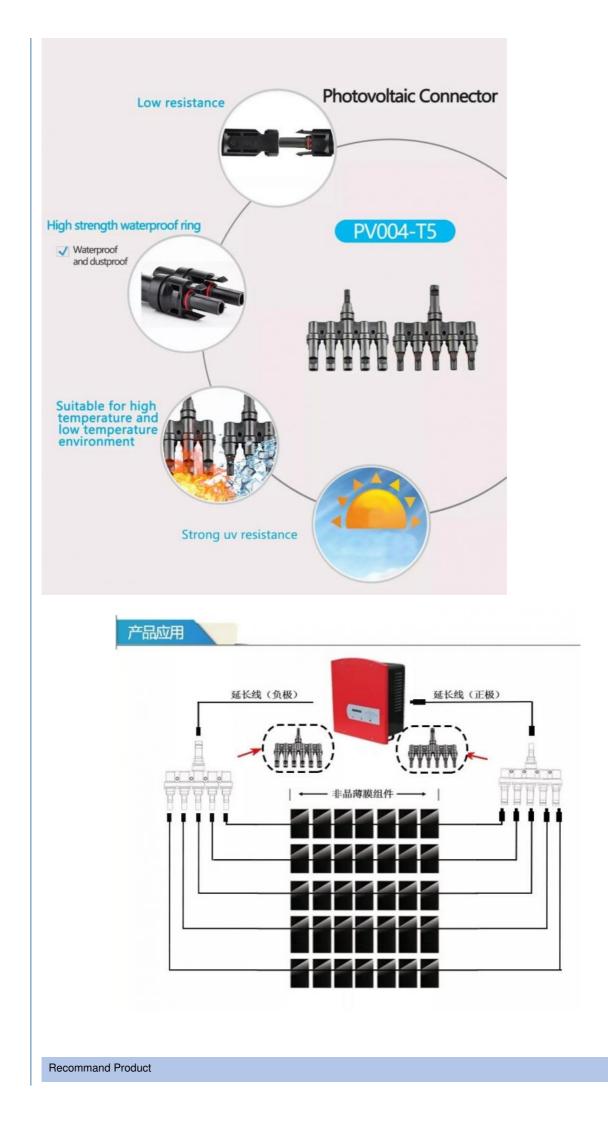

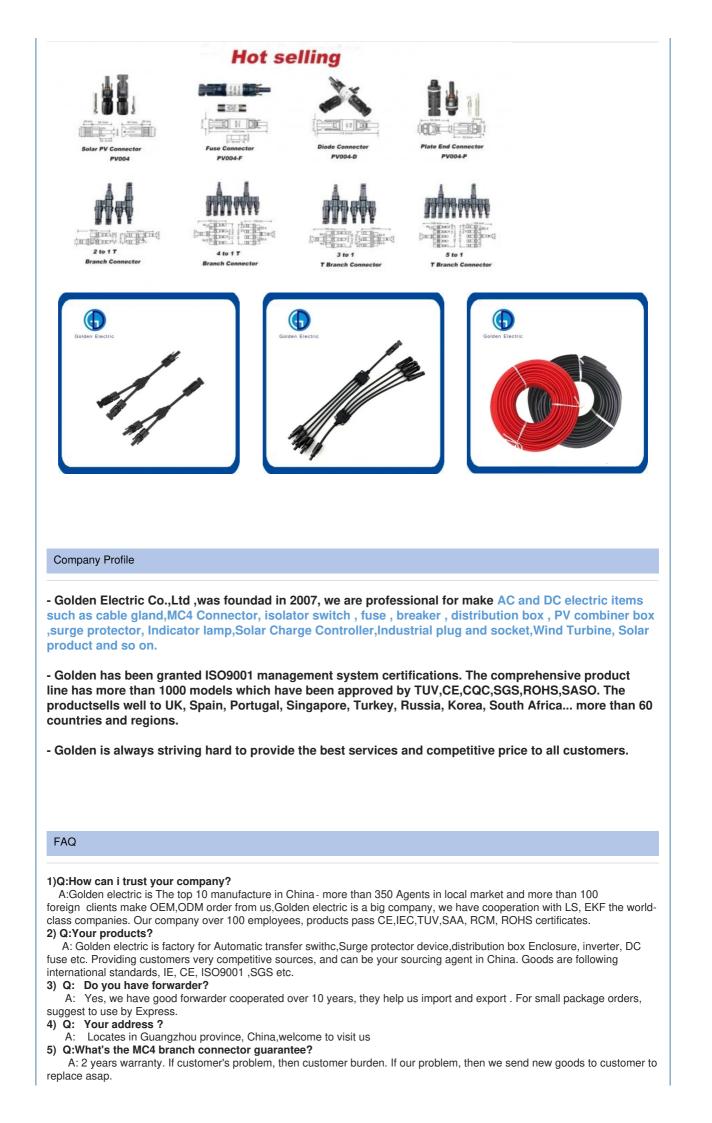

<ul> <li>6) Q:What's about MOQ? Delivery time ? <ul> <li>A: 1pcs for MC4 Branch Connector.</li> </ul> </li> <li>7) Q: What's the payment term? <ul> <li>A: Normally 100% T/T in advanced payment. If big order then about 50% advanced payment, balance before shipment.PAYPAL,WESTERN UNION,CASH for small order .</li> <li>8) Q:What's your contact information ?</li> <li>Send us your inquiry !we will reply you in 24 hours !</li> </ul> </li> </ul>		
Guangzhou Golden Electric Co., Ltd.		
O08618998498109 eva@china-golden.com.cn c chinagoldene.com Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District, Guangzhou city,Guangdong province,China		