

# Silver Plated Copper Alloy Solar Ribbon Wire Burr Free For Solar Applications

ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001,

Peak Season Lead Time: more than 12

LC, T/T, PayPal, Western Union

months Off Season Lead Time: within 15

# **Basic Information**

- Place of Origin:
- Brand Name: Golden Electric /OEM

China

IATF16949

workdays

5000/Month

1

- Certification:
- Minimum Order Quantity:
- Packaging Details: Carton/Pallet
- Delivery Time:
- Payment Terms:
- Supply Ability:



# **Product Specification**

- Materia:
- Copper Content Of Substrate:
- Transport Package:
- Trademark:
- Origin:
- HS Code:
- Supply Ability:
- After-sales Service:
- Warranty:
- Condition:
- Certification:
- Application:
- Specification:

0----

Lead >=99.95% Roll Golden Electric Or Customize China 8537209000 5000/Month 3years 3years New ISO, CE Industrial All Kind Of Size, Different Sizes And




All Kind Of Size, Different Sizes And Specifications

## More Images









for more products please visit us on chinagoldene.com

## **Product Description**

# **Product Description:**

PV Ribbon is engineered to individual client specifications with dimensional and physical property flexibility to fit your solar module design.

\*Rolled flat, from round wire for burr free ribbon with in-line gauge measurement for dimensional thickness and width accuracy & consistency;

- \* This combination of processes results in supelrior coatings and a completely burr free product;
- \* State of the art annealing ensures consistent physical properties with low yield strength, high elemention for low cell breakage:
- elongation for low cell breakage;

\* Lead or Lead free consistent solders applied on all four sicdes post production for a perfect bond between solar cell and tabbing ribbon;

\* Precision levelled, wound and packaged for safe transport and problem-free strin

# Main features:

1.Can be customized.


2.Stable quality.

3.Standard production chain and automatic line ensure fast delivery.

4.Passed SGS testing certification, fully in line with the European ROHS directive standards.

1.0 ×0. 25 Datasheet	
Type Specification	1.0*0.25
Copper Content of Substrate	≥99.95%
Substrate Resistivity	≤0.01724Ω. mm2 /m
Fusion Point	143-189ºC
Single-sided Coating	20±5um
Thickness Tolerance	±0.01mm
Width Tolerance	±0.05mm
Elongation	≥25%
Tensile Strength	150~220MPa
RPO.2/Yield Strength RPO.2	≤65MPa
Sickle Bending	≤0.3%
Tabbing Ribbon Resistivity	≤0.0224Ω. mm2 /m
Solder ability(N)	≥1.ON

# **Product Details Display:**

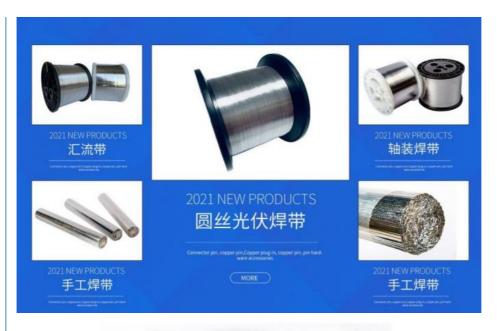





Package:



1) Are you a factory or trading company? Yes we are factories.

## 2) What is your FOB port?

FOB Guangzhou, and we can according to customer requirements.

## 3) What is your delivery time?

3-7 days for samples, 10-30 days for large quantities, according to your order.

## 4) How about your after-sale service?

We can offer you timely and best after-sales service. Now we have built our relationship in many overseas countries like Brazil, Pakistan, Japan and German. It makes our after-sale service very easy and effective to reach you. Also our 24 hours online inquiry service is available.

## 5) Can I have my own logo on your products?

Yes, OEM&ODM service is available.

