

Cuttable Round Solar PV Ribbon With Copper Content Of Substrate 99.95%

Basic Information

Place of Origin: China

Brand Name: Golden Electric /OEM

• Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000,

ISO 20000, OHSAS/ OHSMS 18001,

IATF16949

Minimum Order Quantity:

Packaging Details: Carton/Pallet

Delivery Time: Peak Season Lead Time: more than 12

months Off Season Lead Time: within 15

workdays

• Payment Terms: LC, T/T, PayPal, Western Union

Supply Ability: 5000/Month



Product Specification

Materia: Lead

• Copper Content Of >=99.95%

Substrate:

• Transport Package: Roll

• Trademark: Golden Electric Or Customize

• Origin: China

HS Code: 8537209000
Supply Ability: 5000/Month
After-sales Service: 3years
Warranty: 3years
Condition: New
Certification: ISO, CE
Application: Industrial

Specification:
 All Kind Of Size, Different Sizes And

Specifications

Operation | LION O Office 4 Mar/Mile Outlank | Domino




More Images









Product Description

Product Description:

PV Ribbon is engineered to individual client specifications with dimensional and physical property flexibility to fit your solar module design.


- *Rolled flat, from round wire for burr free ribbon with in-line gauge measurement for dimensional thickness and width accuracy & consistency;
- * This combination of processes results in supelrior coatings and a completely burr free product;
- * State of the art annealing ensures consistent physical properties with low yield strength, high elongation for low cell breakage;
- * Lead or Lead free consistent solders applied on all four sicdes post production for a perfect bond between solar cell and tabbing ribbon;
- * Precision levelled, wound and packaged for safe transport and problem-free strin

Main features:

- 1.Can be customized.
- 2.Stable quality.
- 3. Standard production chain and automatic line ensure fast delivery.
- 4. Passed SGS testing certification, fully in line with the European ROHS directive standards.

| 1.0 ×0. 25 Datasheet | |
|-----------------------------|-------------------|
| Type Specification | 1.0*0.25 |
| Copper Content of Substrate | ≥99.95% |
| Substrate Resistivity | ≤0.01724Ω. mm2 /m |
| Fusion Point | 143-189ºC |
| Single-sided Coating | 20±5um |
| Thickness Tolerance | ±0.01mm |
| Width Tolerance | ±0.05mm |
| Elongation | ≥25% |
| Tensile Strength | 150~220MPa |
| RPO.2/Yield Strength RPO.2 | ≤65MPa |
| Sickle Bending | ≤0.3% |
| Tabbing Ribbon Resistivity | ≤0.0224Ω. mm2 /m |
| Solder ability(N) | ≥1.ON |

Product Details Display:

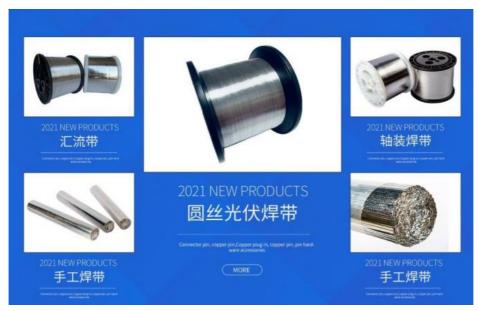





Package:



1) Are you a factory or trading company?

Yes we are factories.

2) What is your FOB port?

FOB Guangzhou, and we can according to customer requirements.

3) What is your delivery time?

3-7 days for samples, 10-30 days for large quantities, according to your order.

4) How about your after-sale service?

We can offer you timely and best after-sales service. Now we have built our relationship in many overseas countries like Brazil, Pakistan, Japan and German. It makes our after-sale service very easy and effective to reach you. Also our 24 hours online inquiry service is available.

5) Can I have my own logo on your products?

Yes, OEM&ODM service is available.





