

Industrial Nikcel Plated PV Solar Panel Ribbon With Customizable Size

Basic Information

. Place of Origin: China

. Brand Name: Golden Electric /OEM

· Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000,

ISO 20000, OHSAS/ OHSMS 18001,

IATF16949

Minimum Order Quantity:

Carton/Pallet · Packaging Details:


Peak Season Lead Time: more than 12 Delivery Time:

months Off Season Lead Time: within 15

workdays

• Payment Terms: LC, T/T, PayPal, Western Union

. Supply Ability: 5000/Month



Product Specification

Lead · Materia: Copper Content Of >=99.95%

Substrate:

Roll

• Transport Package:

Trademark: Golden Electric Or Customize

China • Origin: 8537209000 . HS Code: Supply Ability: 5000/Month After-sales Service: 3years 3years • Warranty: · Condition: New · Certification: ISO, CE

Application: Industrial

. Specification: All Kind Of Size, Different Sizes And

Specifications



More Images









Product Description

Product Description

PV Ribbon is engineered to individual client specifications with dimensional and physical property flexibility to fit your solar module design.

- *Rolled flat, from round wire for burr free ribbon with in-line gauge measurement for dimensional thickness and width accuracy & consistency;
- * This combination of processes results in supelrior coatings and a completely burr free product;
- * State of the art annealing ensures consistent physical properties with low yield strength, high elongation for low cell breakage;
- * Lead or Lead free consistent solders applied on all four sicdes post production for a perfect bond between solar cell and tabbing ribbon;
- * Precision levelled, wound and packaged for safe transport and problem-free strin

Main features:

- 1.Can be customized.
- 2.Stable quality.
- 3. Standard production chain and automatic line ensure fast delivery.
- 4. Passed SGS testing certification, fully in line with the European ROHS directive standards.

Product Parameters

1.0 ×0. 25 Datasheet	
Type Specification	1.0*0.25
Copper Content of Substrate	≥99.95%
Substrate Resistivity	≤0.01724Ω. mm2 /m
Fusion Point	143-189ºC
Single-sided Coating	20±5um
Thickness Tolerance	±0.01mm
Width Tolerance	±0.05mm
Elongation	≥25%
Tensile Strength	150~220MPa
RPO.2/Yield Strength RPO.2	≤65MPa
Sickle Bending	≤0.3%
Tabbing Ribbon Resistivity	≤0.0224Ω. mm2 /m
Solder ability(N)	≥1.ON

Details display









2021 NEW PRODUCTS 手工焊带 2021 NEW PRODUCTS <mark>圆丝光伏焊带</mark>

Connector pin, copper pin, Copper plug-in, copper pin, pin hard-

Hone




2021 NEW PRODUCTS 手工焊带

Committee and a committee of the committ





Packaging and Shipping

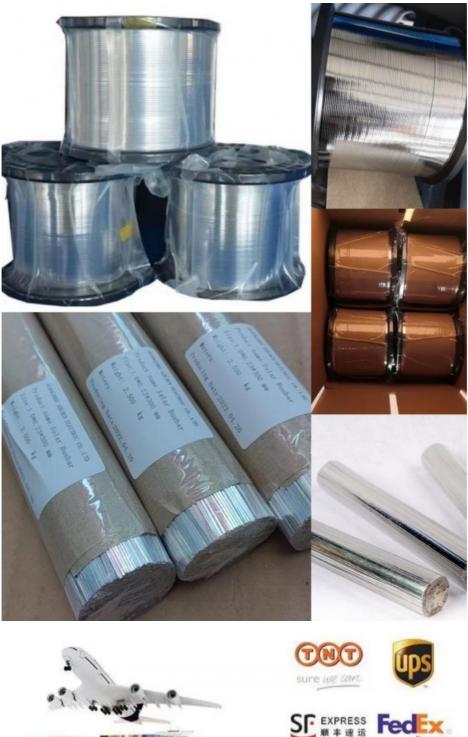



1) Are you a factory or trading company?

Yes we are factories.

2) What is your FOB port?

FOB Guangzhou, and we can according to customer requirements.

3) What is your delivery time?

3-7 days for samples, 10-30 days for large quantities, according to your order.

4) How about your after-sale service?

We can offer you timely and best after-sales service. Now we have built our relationship in many overseas countries like Brazil, Pakistan, Japan and German. It makes our after-sale service very easy and effective to reach you. Also our 24 hours online inquiry service is available.

5) Can I have my own logo on your products? Yes, OEM&ODM service is available.

Guangzhou Golden Electric Co., Ltd.

008618998498109

eva@china-golden.com.cn

chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District, Guangzhou city, Guangdong province, China