




## Customized Solar PV Wire Copper Conductor with PVC Insulation Nym 3mm

Our Product Introduction


### Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Model Number: Nym-J
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month



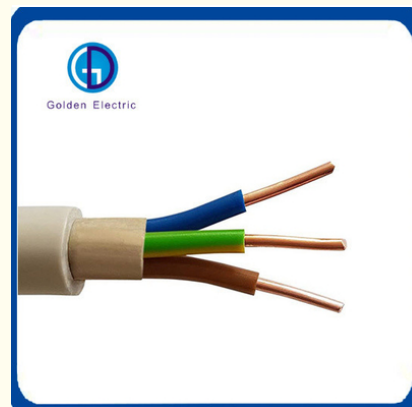


### Product Specification

- Jacket: PVC
- Product Name: Nym Power Cable
- Material: Copper+PVC+PVC
- Color: Customizable
- Core: 1/2/3/4/5 Cores
- MOQ: 100PCS
- Rated Voltage: 0.6/1kv
- Warranty: 100%Qualified
- Certificate: ISO9001/ISO14001 /OHSAS18001/CCC
- Standard: IEC 60227
- Transport Package: Wooden Case/Plastic Film Case
- Specification: Different Sizes And Specifications
- Trademark: Golden Electric Or Customize
- Origin: China
- HS Code: 8543709990

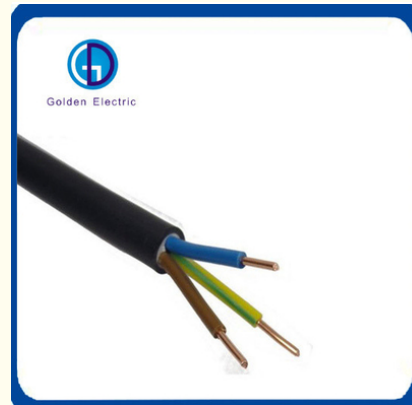

### More Images

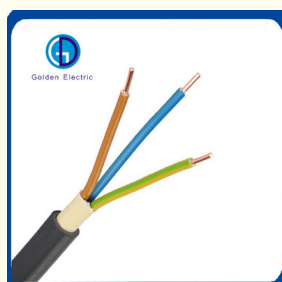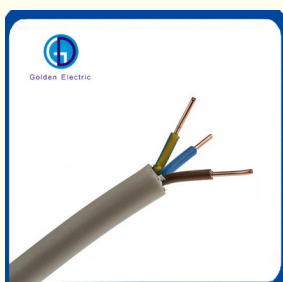

for more products please visit us on [chinagoldene.com](http://chinagoldene.com)

## Product Description

### Company

#### Profile

GoldenElectricCo., Ltd.

is professional make of Electrical products .Such as distribution box, waterproof plug, socket, wall switch, waterproof plastic ,Aluminum box ,Changeover Switch and disconnecting switch,MC4 Connector.isolator switch.fusebreaker.distribution box,PV combiner box .surge protector, Indicatorlamp,Solar Charge Controller,Industrialplugandsocket,BusbarInsulator,Meter Socket,Wind Turbine, Terminal Block,Solar product and so on. all products comply with IEC, A S/NZS standard. passed CE, IP66, ROHS certificates.at present we have exported to many countries and have serve these customers with professional electrical solution.

### Product Description


#### **NYM-J NYM-O type unshielded PVC insulated PVC sheathed cable**

##### **Application and Description**

Used to fix power and control cables in installation. It can be used in dry and wet open areas, and can also be installed under lime, walls and concrete, but cannot be laid in compact concrete. It can also be used outdoors under the conditions of avoiding direct sunlight. For example: laying outdoors, underground, water, indoors, cable ducts, industrial and power distribution cabinets for power plants, as well as in user networks, and used in fixed installations without mechanical damage.


##### **Cable Structure**

1. Solid core or stranded bare copper conductor
2. Follow DIN VDE0295 cl.1/cl.2 BS 6360 cl.1/cl.2, IEC60228 cl.1/cl.2
3. PVC insulation TI1 category in accordance with DIN VDE 0281 Part 1
4. Color coding complies with DIN VDE 0293-308
5. Ultra-soft PVC outer sheath TM1 category Complies with DIN VDE 0281 Part 1

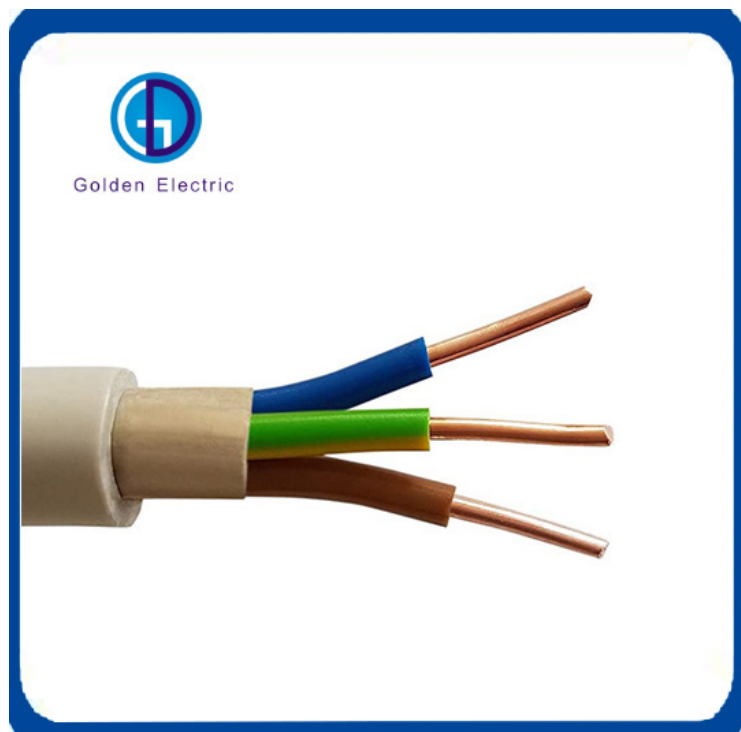



Golden Electric

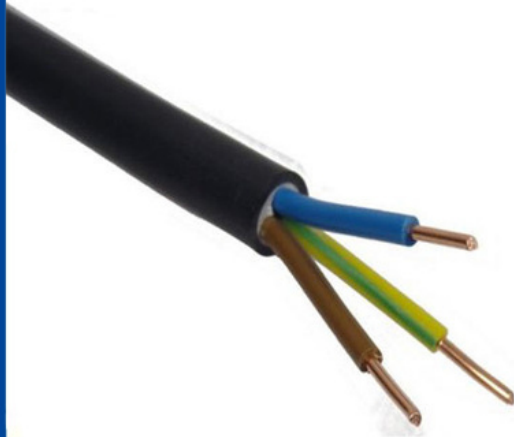


Golden Electric







Golden Electric

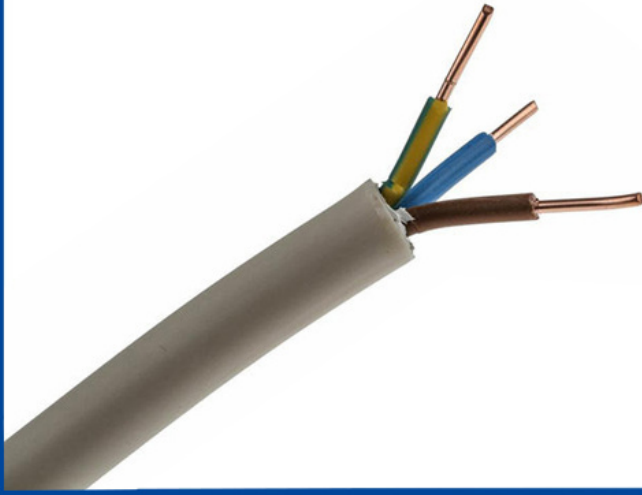

Golden Electric

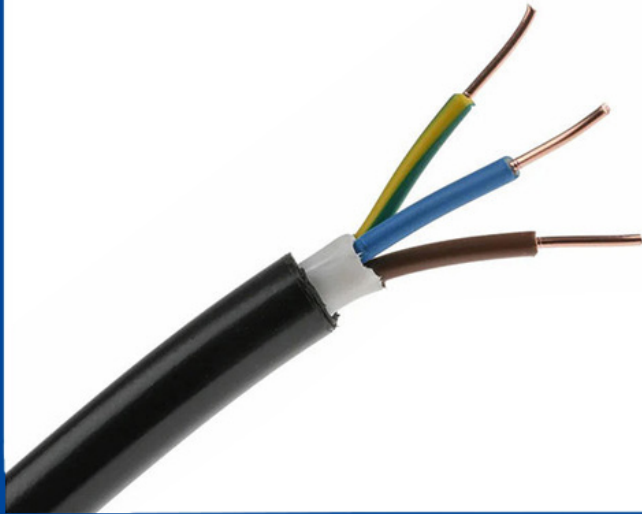

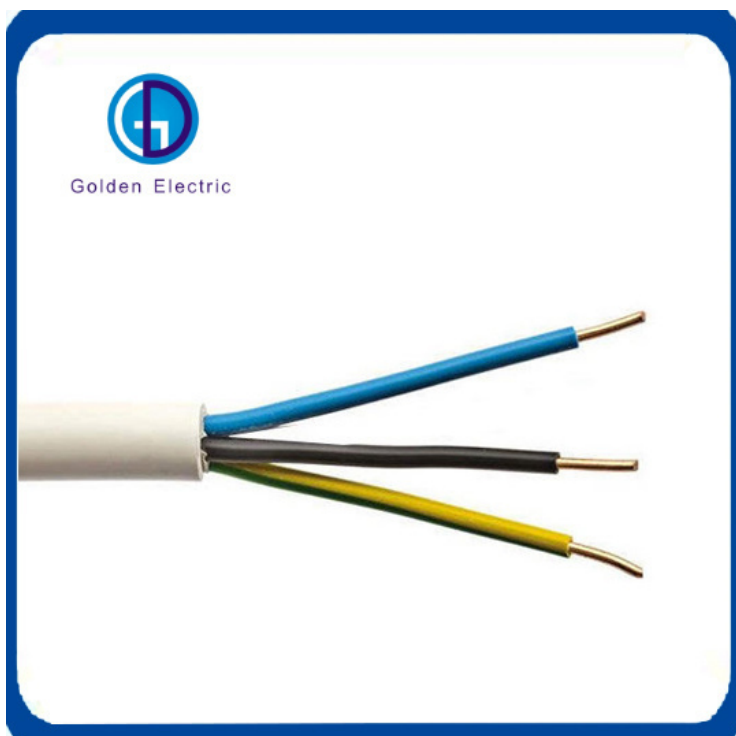

#### Products Details

##### Model and application

Wire gauge	Number of cores x conductor cross-sectional area mm	Nominal insulation thicknessmm	Nominal sheath thickness mm	Nominal outer diameter mm	Nominal copper weight kg/km	Nominal cable weight kg/km
16(solid)	1X1.5	0.6	1.4	5.4	14.4	40
16(solid)	2 X1.5	0.6	1.4	8.7	29	170
16(solid)	3 X1.5	0.6	1.4	9.1	43	135

16(solid)	4 X1.5	0.6	1.4	9.8	58	160
16(solid)	5 X1.5	0.6	1.4	10.3	72	190
16(solid)	7 X1.5	0.6	1.4	11.5	101	235
16(solid)	10 X1.5	0.6	1.4	13.8	144	330
16(solid)	12 X1.5	0.6	1.4	14.4	173	405
14(solid)	1 X2.5	0.7	1.4	6	24	70
14(solid)	3 X2.5	0.7	1.4	10.4	72	190
14(solid)	4 X2.5	0.7	1.4	11.3	96	230
14(solid)	5 X2.5	0.7	1.4	12	120	270
14(solid)	7 X2.5	0.7	1.6	13.2	168	342
12(solid)	1X4	0.8	1.6	6.6	38	80
12(solid)	3 X4	0.8	1.6	12	115	258
12(solid)	4 X4	0.8	1.6	13	154	330
12(solid)	5 X4	0.8	1.6	14.5	192	410
10(solid)	1X6	0.8	1.6	7.2	58	105
10(solid)	3 X6	0.8	1.6	13	173	320
10(solid)	4 X6	0.8	1.6	15.1	230	460
10(solid)	5 X6	0.8	1.6	16.1	288	540
8(solid)	1X10	1	1.6	8.4	96	155
8(solid)	4 X10	1	1.6	17.6	384	680
8(solid)	5 X10	1	1.6	19.2	480	850
6(7/14)	1X16	1.2	1.8	9.9	154	230
6(7/14)	4 X16	1.2	1.8	21.3	614	1048
6(7/14)	5 X16	1.2	1.8	23.4	768	1280
4(7/12)	1x25	1.4	2	12	240	325
4(7/12)	4X25	1.4	2	25.8	960	1649
4(7/12)	5 X25	1.4	2	28.7	1200	1970
2(7/10)	4X35	1.4	2	28.5	1344	2000



**low  
smoke**




**environmental  
protection**



**halogen  
free**



**fire  
resistant**

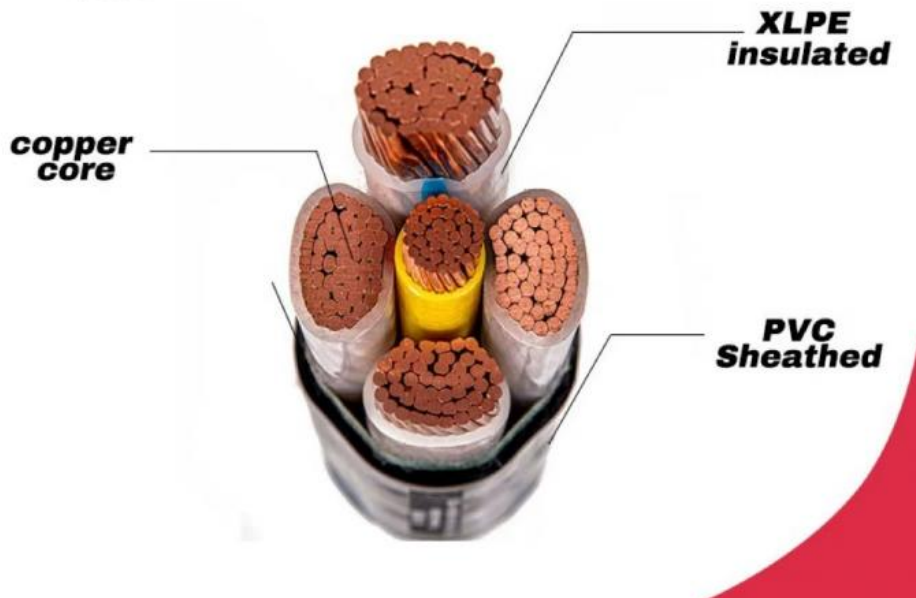

**01**

**99.9% oxygen  
free copper**

- Refined pure oxygen free copper, low resistance
- Good electrical conductivity, safe and power saving

**02**

**Low eccentricity**

- Uniform thickness, prevent breakdown
- Safety guarantee



**03**

**Environment-friendly  
PVC materials**

- Bright color, clear logo
- Insulation flame retardant



Golden Electric



Solar Power Outdoor PV DC Isolator Switch



Golden Electric



Network Crimping Plier Electric Crimping Tool



Golden Electric



Waterproof Switch Standard Socket IP55  
Ammeter



Golden Electric



Ad LED Pilot Lamp with Digital Voltmeter and Ammeter

#### Packing & Delivery

Packaging Details : seaworthy packing

Lead time:

Quantity(meters) 1 - 1000 >1000

Lead time (days) 7 To be negotiated

#### FAQ

Q1: Are you a factory or trading company

A1: We are a factory, we can guarantee our price is first-hand, very cheap and competitive.

Q2: How does your factory do regarding quality control?

A2: All the products will be 100% checked before the shipment

Q3: When can I get the price?

A3: Usually we quote within 24 hours after we get your inquiry.

Q4: How could I get a sample?

A4: if you can not buy our product in your local area, we will ship a sample to you. You will be charged a sample price plus all related shipping costs. Express delivery charge depends on the quantity of the samples.

Q5: What is the price of shipping?

A5: Depending upon the port of delivery, prices vary.

**Any more query please contact with us, thank you!**





**Guangzhou Golden Electric Co., Ltd.**



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,  
Guangzhou city, Guangdong province, China