




IP67 3P 4P 5P Industrial Waterproof Plug and Sockets with Temperature Range -25- 80

Our Product Introduction


Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month

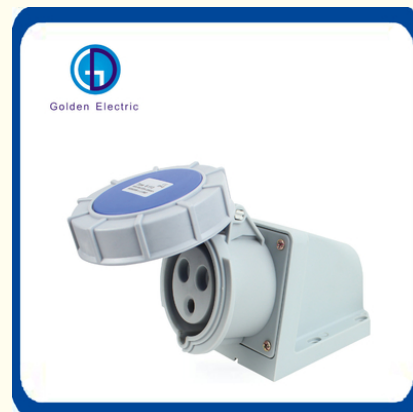

Product Specification

- Model NO.: E-112 SERIES
- Nominal Voltage: 220V
- Brand: Golden Electric
- Feature: Safe, Durable, Timesaving
- Color: White Blue Yellow Red
- Rated Voltage: 110V/220V/380V/415V
- Protection: IP44/IP67/IP55
- Earth Contact Position: 6h, 9h
- Material: PA66
- Rated Current: 16A 32A 63A 125A
- Temperature Range: -25- +80
- Transport Package: Standard Export Carton
- Specification: 2P, 3P, 3P+N, 3P+N+E
- Trademark: Golden Electric
- Origin: China

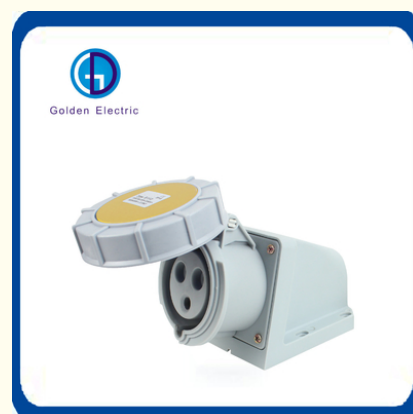

More Images



for more products please visit us on chinagoldene.com

Product Description

Application:

1. Petrochemical engineering
2. Electric power
3. Railway
4. Airport
5. Mine diggings
6. Construction site
7. Water treatment plant
8. Wharf
9. Hotel

Testing & Quality Ensure


Quality is our only faith, we have a professional Research and development team and high-quality workers sparing no efforts for pursuit of perfect production. We equip with a series of inspection devices for testing and ensuring every product we produce is perfect.

Both the quality and performance of our products can match the international standards EN/IEC60309-2 and the national standard GB 11919-2001. Products have obtained international certifications, such as CE, ROHS, TUV, CB, etc.


Our Advantage

We provide different series products for different environments. Using the best material, importing good quality copper and other parts to make the product with longer mechanical life, resistance to severe weather, ageing, alkali resistance, anti-proof and dust prevention.






E-114 (No.: YT18206)
E-124 (No.: YT18210)
电流 Current(A): 16A, 32A
电压 Voltage(V): 380-415V~
防护等级 Protection degree: IP44



Earth contact position	6h
Rated current(A)	16 32
Pole	4
Dimension(mm)	a 150 163 b 101 107
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-115 (No.: YT18207)
E-125 (No.: YT18211)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-380V~
240-415V~
防护等级 Protection degree: IP44



Earth contact position	6h
Rated current(A)	16 32
Pole	5
Dimension(mm)	a 153 163 b 103 113
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-213-4 (No.: YT18212)
E-223-4 (No.: YT18216)
电流 Current(A): 16A, 32A
电压 Voltage(V): 110-130V~
防护等级 Protection degree: IP44



Earth contact position	4h
Rated current(A)	16 32
Pole	3
Dimension(mm)	a 127 159 b 75 90 c 6-15 10-20 d 51 66 sw 38 50
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-213 (No.: YT18213)
E-223 (No.: YT18217)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-240V~
防护等级 Protection degree: IP44



Earth contact position	6h
Rated current(A)	16 32
Pole	3
Dimension(mm)	a 127 159 b 75 90 c 6-15 10-20 d 51 66 sw 38 50
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-214 (No.: YT18214)
E-224 (No.: YT18218)
电流 Current(A): 16A, 32A
电压 Voltage(V): 380-415V~
防护等级 Protection degree: IP44



Earth contact position	6h
Rated current(A)	16 32
Pole	4
Dimension(mm)	a 135 159 b 80 90 c 6-15 10-20 d 57 66 sw 38 50
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-215 (No.: YT18215)
E-225 (No.: YT18219)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-380V~
240-415V~
防护等级 Protection degree: IP44



Earth contact position	6h
Rated current(A)	16 32
Pole	5
Dimension(mm)	a 135 159 b 80 90 c 6-15 10-20 d 57 66 sw 38 50
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-413-4 (No.: YT18220)
E-423-4 (No.: YT18224)
电流 Current(A): 16A, 32A
电压 Voltage(V): 110-130V~
防护等级 Protection degree: IP44



Earth contact position	4h
Rated current(A)	16 32
Pole	3
Dimension(mm)	axb 76 76 cxd 61 61 e 16 20 f 60 70 g 5.5 5.5 h 48 61 i 85 95
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-413 (No.: YT18221)
E-423 (No.: YT18225)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-240V~
防护等级 Protection degree: IP44



Earth contact position	6h
Rated current(A)	16 32
Pole	3
Dimension(mm)	axb 76 76 cxd 61 61 e 16 20 f 60 70 g 5.5 5.5 h 48 61 i 85 95
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-414 (No.: YT18222)
E-424 (No.: YT18226)
电流 Current(A): 16A, 32A
电压 Voltage(V): 380-415V~
防护等级 Protection degree: IP44



Earth contact position	6h
Rated current(A)	16 32
Pole	4
Dimension(mm)	axb 76 76 cxd 61 61 e 17 20 f 60 70 g 5.5 5.5 h 53 61 i 88 95
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-415 (No.: YT18223)
E-425 (No.: YT18227)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-380V~
240-415V~
防护等级 Protection degree: IP44



Earth contact position	6h
Rated current(A)	16 32
Pole	5
Dimension(mm)	axb 76 76 cxd 61 61 e 18 22 f 68 71 g 6.5 6.5 h 60 62 i 91 98
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-313-4 (No.: YT18228)
E-323-4 (No.: YT18232)
电流 Current(A): 16A, 32A
电压 Voltage(V): 110-130V~
防护等级 Protection degree: IP44



Earth contact position	4h
Rated current(A)	16 32
Pole	3
Dimension(mm)	a 60 60 b 60 60 c 60 60 d 60 60 e 60 60 f 60 60 g 60 60 h 60 60 i 60 60
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-313 (No.: YT18229)
E-323 (No.: YT18233)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-240V~
防护等级 Protection degree: IP44



Earth contact position	6h
Rated current(A)	16 32
Pole	3
Dimension(mm)	a 60 60 b 60 60 c 60 60 d 60 60 e 60 60 f 60 60 g 60 60 h 60 60 i 60 60
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-114 (No.: YT18183)
E-124 (No.: YT18187)
电流 Current(A): 16A, 32A
电压 Voltage(V): 380-415V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	16 32
Pole	4
Dimension(mm)	a 155 170 b 101 108
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-115 (No.: YT18184)
E-125 (No.: YT18188)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-380V~
240-415V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	16 32
Pole	5
Dimension(mm)	a 155 172 b 106 111
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-133 (No.: YT18189)
E-143 (No.: YT18192)
电流 Current(A): 63A, 125A
电压 Voltage(V): 220-250V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	63 125
Pole	3
Dimension(mm)	a 171 220 b 170 220 c 250 285 d 118 140 e 137 185 f 104 130
Cable nominal cross-section area (mm²)	6-16 16-50




E-134 (No.: YT18190)
E-144 (No.: YT18193)
电流 Current(A): 63A, 125A
电压 Voltage(V): 380-415V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	63 125
Pole	4
Dimension(mm)	a 171 220 b 170 220 c 250 285 d 118 140 e 137 185 f 104 130
Cable nominal cross-section area (mm²)	6-16 16-50



E-135 (No.: YT18191)
E-145 (No.: YT18194)
电流 Current(A): 63A, 125A
电压 Voltage(V): 220-380V~
240-415V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	63 125
Pole	5
Dimension(mm)	a 171 220 b 170 220 c 250 285 d 118 140 e 137 185 f 104 130
Cable nominal cross-section area (mm²)	6-16 16-50




E-1013 (No.: YT18195)
输入 Input: 1 plug
16A 220V
输出 Output: 3 sockets
16A 220V
防护等级 Protection degree: IP67



E-1014 (No.: YT18196)
输入 Input: 1 plug
16A 380V
输出 Output: 2 sockets
16A 380V
防护等级 Protection degree: IP67




E-315 (No.: YT18170)
E-325 (No.: YT18174)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-380V~
240-415V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	16 32
Pole	5
Dimension(mm)	a 76×76 76×76 b 61×61 61×61 c 17 22 d 62 73 e 91 102 f 60 60 g 5.5 5.5
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-333 (No.: YT18175)
E-343 (No.: YT18178)
电流 Current(A): 63A, 125A
电压 Voltage(V): 220-250V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	63 125
Pole	3
Dimension(mm)	a 100 120 b 100 120 c 80 100 d 80 100 e 35 45 f 84.5 104 g 114 127 h 80 90
Cable nominal cross-section area (mm²)	6-16 16-50




E-334 (No.: YT18176)
E-344 (No.: YT18179)
电流 Current(A): 63A, 125A
电压 Voltage(V): 380-415V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	63 125
Pole	4
Dimension(mm)	a 100 120 b 100 120 c 80 100 d 80 100 e 35 45 f 84.5 104 g 114 127 h 80 90
Cable nominal cross-section area (mm²)	6-16 16-50




E-335 (No.: YT18177)
E-345 (No.: YT18180)
电流 Current(A): 63A, 125A
电压 Voltage(V): 220-380V~
240-415V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	63 125
Pole	5
Dimension(mm)	a 100 120 b 100 120 c 80 100 d 80 100 e 35 45 f 84.5 104 g 114 127 h 80 90
Cable nominal cross-section area (mm²)	6-16 16-50




E-113-4 (No.: YT18181)
E-123-4 (No.: YT18185)
电流 Current(A): 16A, 32A
电压 Voltage(V): 110-130V~
防护等级 Protection degree: IP67



Earth contact position	4h
Rated current(A)	16 32
Pole	3
Dimension(mm)	a 155 170 b 99 108
Cable nominal cross-section area (mm²)	1-2.5 2.5-6



E-113 (No.: YT18182)
E-123 (No.: YT18186)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-240V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	16 32
Pole	3
Dimension(mm)	a 155 170 b 99 108
Cable nominal cross-section area (mm²)	1-2.5 2.5-6




E-433 (No.: YT18161)
E-443 (No.: YT18164)
电流 Current(A): 63A, 125A
电压 Voltage(V): 220-240V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	63 125
Pole	3
Dimension(mm)	a 107 130 b 107 130 c 80 100 d 80 100 e 80 100 f 80 100 g 80 100 h 80 100 i 80 100
Cable nominal cross-section area (mm²)	6-25 16-50



E-434 (No.: YT18162)
E-444 (No.: YT18165)
电流 Current(A): 63A, 125A
电压 Voltage(V): 380-415V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	63 125
Pole	4
Dimension(mm)	a 107 130 b 107 130 c 80 100 d 80 100 e 80 100 f 80 100 g 80 100 h 80 100 i 80 100
Cable nominal cross-section area (mm²)	6-25 16-50



E-435 (No.: YT18163)
E-445 (No.: YT18166)
电流 Current(A): 63A, 125A
电压 Voltage(V): 220-240V~
240-415V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	63 125
Pole	5
Dimension(mm)	a 107 130 b 107 130 c 80 100 d 80 100 e 80 100 f 80 100 g 80 100 h 80 100 i 80 100
Cable nominal cross-section area (mm²)	6-25 16-50



E-313-4 (No.: YT18167)
E-323-4 (No.: YT18171)
电流 Current(A): 16A, 32A
电压 Voltage(V): 110-130V~
防护等级 Protection degree: IP67



Earth contact position	4h
Rated current(A)	16 32
Pole	3
Dimension(mm)	axb 76 x 76 76 x 76 cx d 61 x 61 61 x 61 a 15 15 b 15 15 c 63 76 d 76 96 e 46 60 f 5 5
Cable nominal cross-section area (mm²)	1-2.5 2.5-6



E-313 (No.: YT18168)
E-323 (No.: YT18172)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-24V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	16 32
Pole	3
Dimension(mm)	axb 76 x 76 76 x 76 cx d 61 x 61 61 x 61 a 15 15 b 15 15 c 63 76 d 76 96 e 46 60 f 5 5
Cable nominal cross-section area (mm²)	1-2.5 2.5-6



E-314 (No.: YT18169)
E-324 (No.: YT18173)
电流 Current(A): 16A, 32A
电压 Voltage(V): 380-415V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	16 32
Pole	4
Dimension(mm)	axb 76 x 76 76 x 76 cx d 61 x 61 61 x 61 a 17 17 b 17 17 c 61 74 d 84 96 e 53 60 f 5.5 5.5
Cable nominal cross-section area (mm²)	1-2.5 2.5-6



E-215 (No.: YT18094)
E-225 (No.: YT18098)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-380V~
240-415V~
防护等级 Protection degree: IP44



Earth contact position	6h
Rated current(A)	16 32
Pole	5
Dimension(mm)	a 141 154 b 93 101 c 64 71 d 8-20 8-20
Cable nominal cross-section area (mm²)	1-2.5 2.5-6



E-213L-4 (No.: YT18099)
E-223L-4 (No.: YT18103)
电流 Current(A): 16A, 32A
电压 Voltage(V): 110-130V~
防护等级 Protection degree: IP44



Earth contact position	4h
Rated current(A)	16 32
Pole	3
Dimension(mm)	a 150 182 b 69 94 c 50.5 65 d 7-16 7-20
Cable nominal cross-section area (mm²)	1-2.5 2.5-6



E-213L (No.: YT18100)
E-223L (No.: YT18104)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-240V~
防护等级 Protection degree: IP44



Earth contact position	6h
Rated current(A)	63 125
Pole	3
Dimension(mm)	a 150 182 b 69 94 c 50.5 65 d 7-16 7-20
Cable nominal cross-section area (mm²)	6-16 16-50



E-214L (No.: YT18101)
E-224L (No.: YT18105)
电流 Current(A): 16A, 32A
电压 Voltage(V): 380-415V~
防护等级 Protection degree: IP44




Earth contact position	6h
Rated current(A)	63 32
Pole	4
Dimension(mm)	a 150 182 b 79 94 c 56 65 d 7-16 7-20
Cable nominal cross-section area (mm²)	6-16 16-50



E-215L (No.: YT18102)
E-225L (No.: YT18106)
电流 Current(A): 16A, 32A
电压 Voltage(V): 220-380V~
240-415V~
防护等级 Protection degree: IP44



Earth contact position	6h
Rated current(A)	16 32
Pole	5
Dimension(mm)	a 171 185 b 93 101 c 64 71 d 7-20 7-20
Cable nominal cross-section area (mm²)	1-2.5 2.5-6



E-233 (No.: YT18107)
E-243 (No.: YT18110)
电流 Current(A): 63A, 125A
电压 Voltage(V): 220-240V~
防护等级 Protection degree: IP67



Earth contact position	6h
Rated current(A)	63 125
Pole	3
Dimension(mm)	a 240 309 b 115 129 c 16-38 30-64 d 108 123
Cable nominal cross-section area (mm²)	6-16 16-50



Golden Electric



Golden Electric





Golden Electric



Golden Electric



Function of IP67 Waterproof Industrial Plug And Socket :

- 1, Our products have undergone the tests under the extreme conditions such as the pesky cold and hot, dustproof, immersed in water and so on, and they have got the certificates from relevant authorized organizations according to the international standard.
- 2, Certificates: **CCC, CE, China Classification Society, ISO9001, CQC**
- 3, German industrial standard DIN VDE6032, European/International standard EN/IEC 60 309-2

4, Application: it is widely applied in the electrical Field, particularly in the steel, Chemical, electrical, absenteeism, ports, airports, oil exploration, foods, subway and other places.

5, Besides the **waterproof** and **dustproof** advantages, have **impact-resistance**, **anti-aging**,

Never rusting features. Also have dustproof, **damp-proof**, **anticorrosion**, **flame-dustproof** and **anti-aging properties** as well as advantages such as **high temperature resistance**, large flexibility, **good impact resistance**, high degree of finish, soft contact of large current and so on.

6, Easy to installation , plug and socket are easy to put in and out at any time and easy to turn on or off the power.

7, Many combined modes so that can reach the customer's demands .

8, The unique design and exquisite appearance can be used in any harsh environment.

FAQ

Q1. Can I have a sample order?

A: Yes, we welcome sample order to test and check quality. Mixed samples are acceptable.

Q2. What about the lead time?

A: Sample needs 1 work-days, mass production time needs 1-2 weeks for order quantity more than 100pcs.

Q3. Do you have any MOQ limit for tried-order?

A: Low MOQ, 1pc for sample checking is available

Q4. How do you ship the goods and how long does it take to arrive?

A: We usually ship by DHL, UPS, FedEx or TNT. It usually takes 3-5 working-days to arrive. Airline and sea shipping also optional.

Q5. Is it OK to print my logo on product?

A: Yes. Please inform us formally before our production and confirm the design firstly based on our sample.

Q6: Do you offer guarantee for the products?

A: Yes, 2 years



Guangzhou Golden Electric Co., Ltd.



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,
Guangzhou city,Guangdong province,China