10A 20A 32A 40A 50A 4pins Round Surface Sockets Australia Standard Socket Outlets 500V IP66 Industrial Plug and Socket

ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001,

Peak Season Lead Time: more than 12

LC, T/T, PayPal, Western Union

months Off Season Lead Time: within 15

Basic Information

- Place of Origin:
- Golden Electric /OEM Brand Name:

China

IATF16949

workdays

5000/Month

1

Certification:

歌德电气

- Minimum Order Quantity:
- Carton/Pallet Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

- Color:
- Customized:

Condition:

- Rated Voltage:
- Product Name:

Grey

- Rated Current:
- Model:

• Material:

- Transport Package:
- Specification:
- Trademark:
- Origin:
- HS Code:
- Supply Ability:
- Grounding:
- Customized New 500V 3p/4p/5p Industrial Plug And Socket PC +Copper 10A,15A,20A,32A,40A,50A Waterproof Industrial Socket Standard Export Carton 10A/20A/32A/40A/50A Golden Or Netural, Or Customer Brand China 8536690000 20000PCS/Month

Standard Grounding



More Images









Product Description

.AUSTRALIAN STANDARD.

JIAHUI ELECTRIC GIVES YOU THE BEST CHOICE



1) Produce with high quality PC material with impact resistant, highly insulated and anti-corrosion.

2) Waterproof glasket and small cap for screws to ensure waterproof rating IP66.

3) Transparent open cover with automatic snap catch latches and with instant visual inspection of inner socket condition and pin

configuration.

4) Laser printing for LOGO and specification not sticker, so can't be erased and looks high quality.

With all above festures, 56SO series are commonly used in chemical, structural, industrial and other extreme environment.

PVC Solvent Bonding Compatibility

All 56 Series Enclosures are manufactured from robust UV stabilised PVC and can be solvent bonded to standard electrical PVC conduit accessories.

Transparent Plastic Materials

The introduction of transparent materials to the 56 Series enables the inspection and checking of the components pin/ socket configuration and wiring at a glance, while still providing protection against the elements

Product Features



Nickel Plating on Copper Material H59-1




Made of Rubber, it has good corrosion resistance, Strong tightness. It can achieve better waterproof effect.

Product Parameters

Model Description Rating(Amps) Voltage(V) No.of phase 56SO310 3 Flat Pins Socket Outlet 10 20 250 1 56SO320 3 Round Pins Socket 20 250 1 56SO320 3 Round Pins Socket 20 250 1 56SO320 3 Round Pins Socket 20 20 250 1 Model Description Rating(Amps) Voltage(V) No.of phase 56SO410 56SO420 4 20 32 500 3 56SO432 4 Round Pins Socket 20 500 3 3 56SO440 50 500 3 3 3 3 3 3 Model Description Rating(Amps) Voltage(V) No.of phase 500 3 56SO510 5 Round Pins Socket 20 500 3 3 56SO530 5 Found Pins Socket 32 500		D			
56SO315 3 Flat Pins Socket Outlet 15 20 250 1 56SO320 3 Round Pins Socket 20 250 1 56SO320 3 Round Pins Socket 20 32 1 32 Model Description Rating(Amps) Voltage(V) No.of phase 32 3 3 Model Description Rating(Amps) Voltage(V) No.of phase 32 3 3 56SO410 4 Round Pins Socket 32 500 3 56SO420 4 Round Pins Socket 32 500 3 56SO432 4 0 50 3 3 Model Description Rating(Amps) Voltage(V) No.of phase 3 56SO430 50 5 5 3 Model Description Rating(Amps) Voltage(V) No.of phase 3 56SO532 5 7 3 3 56SO540 0utlet 32 500 3	Model	Description	Rating(Amps)	voltage(v)	No.of phase
56SO320 20 250 1 56SO320 3 Round Pins Socket 20 250 1 56SO322 Outlet 32 20 1 Model Description Rating(Amps) Voltage(V) No.of phase 56SO410 20 32 56SO410 4 Round Pins Socket 20 32 500 3 56SO420 4 Round Pins Socket 32 500 3 3 56SO440 0 50 500 3 3 3 3 Model Description Rating(Amps) Voltage(V) No.of phase 50 3 3 3 Model Description Rating(Amps) Voltage(V) No.of phase 50 3 3 3 Model Description Rating(Amps) Voltage(V) No.of phase 56SO510 5 3 3 3 56SO540 5 0utlet 32 500 3 3	56SO310		10		
Second 20 Round Pins Socket 20 56SO322 Outlet 32 Model Description Rating(Amps) Voltage(V) No.of phase 56SO410 4 Round Pins Socket 20 56SO420 4 20 32 56SO420 4 20 32 56SO420 4 20 32 56SO440 0utlet 32 500 3 56SO440 0 50 3 3 Model Description Rating(Amps) Voltage(V) No.of phase 50 56SO440 50 50 3 3 Model Description Rating(Amps) Voltage(V) No.of phase 56SO510 5	56SO315	3 Flat Pins Socket Outlet	15	250	1
Second Lange Science Image Science I	56SO320		20		
Model Description Rating(Amps) Voltage(V) No.of phase 56SO410 4 10 20 32 500 3 56SO432 4 0utlet 32 500 3 56SO440 0 50 3 40 50 3 56SO440 0 50 500 3 3 40 50 3 Model Description Rating(Amps) Voltage(V) No.of phase 56SO510 5 5 8 10	56SO320	3 Round Pins Socket	20	1	
Security	56SO332	Outlet	32	1	
Security		-			
56SO420 4 Round Pins Socket 20 32 500 3 56SO440 Outlet 40 50 40 50 3 56SO450 50 50 3 40 50 3 Model Description Rating(Amps) Voltage(V) No.of phase 56SO510 5 5 5 5 5 5 5 5 5 5 5 6 5 5 5 6 32 5 5 5 5 6 32 5 5 5 6 32 5 5 5 5 5 3	Model	Description	Rating(Amps)	Voltage(V)	No.of phase
4 Round Pins Socket 32 500 3 56SO432 Outlet 40 40 50 3 56SO440 50 50 3 3 3 Model Description Rating(Amps) Voltage(V) No.of phase 56SO510 10 10 56SO520 5 5 5 5 5 5 5 5 5 5 5 5 5 5 3 <td< td=""><td>56SO410</td><td></td><td>10</td><td></td><td></td></td<>	56SO410		10		
56SO432 Outlet 32 500 3 56SO440 40 50 3 56SO450 50 50 3 Model Description Rating(Amps) Voltage(V) No.of phase 56SO510 10 56SO520 5 Round Pins Socket 20 56SO532 Outlet 32 56SO540 40 32	56SO420		20	1	3
56SO440 40 56SO450 50 Model Description Rating(Amps) Voltage(V) No.of phase 56SO510 10 56SO520 5 Round Pins Socket 56SO532 Outlet 56SO540 32 40 40	56SO432		32	500	
Model Description Rating(Amps) Voltage(V) No.of phase 56SO510 10	56SO440	Outlet	40	1	
56SO510 10 56SO520 5 Round Pins Socket 20 56SO532 Outlet 32 56SO540 40 32	56SO450		50	1	
56SO510 10 56SO520 5 Round Pins Socket 20 56SO532 Outlet 32 56SO540 40 32		-			
56SO520 5 Round Pins Socket 20 56SO532 Outlet 32 56SO540 40	Model	Description	Rating(Amps)	Voltage(V)	No.of phase
56SO532 Outlet 32 3 56SO540 40 40 40	56SO510		10		
56SO532 Outlet 32 3 56SO540 40 40 40	5000500		00		
56SO532 Outlet 32 56SO540 40			20	500	2
	56SO532	Outlet	32	500	5
56SO550 50	56SO540		40	1	
	56SO550		50	1	

Product Details

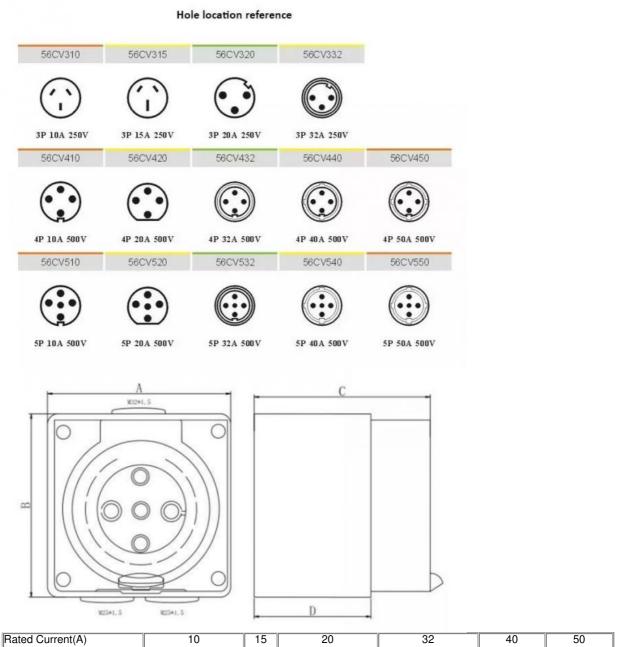


Rated Current(A)	10		15	20		32		40		50				
No.of Poles	3	4	5	3	3	4	5	3	4	5	4	5	4	5
A(mm)	101	101	101	101	101	101	101	101	101	101	101	101	101	101
B(mm)	101	101	101	101	101	101	101	101	101	101	101	101	101	101
C(mm)	94	94	94	94	94	94	94	94	94	94	94	94	94	94
D(mm)	63	63	63	63	63	63	63	63	63	63	63	63	63	63

Recommand Product







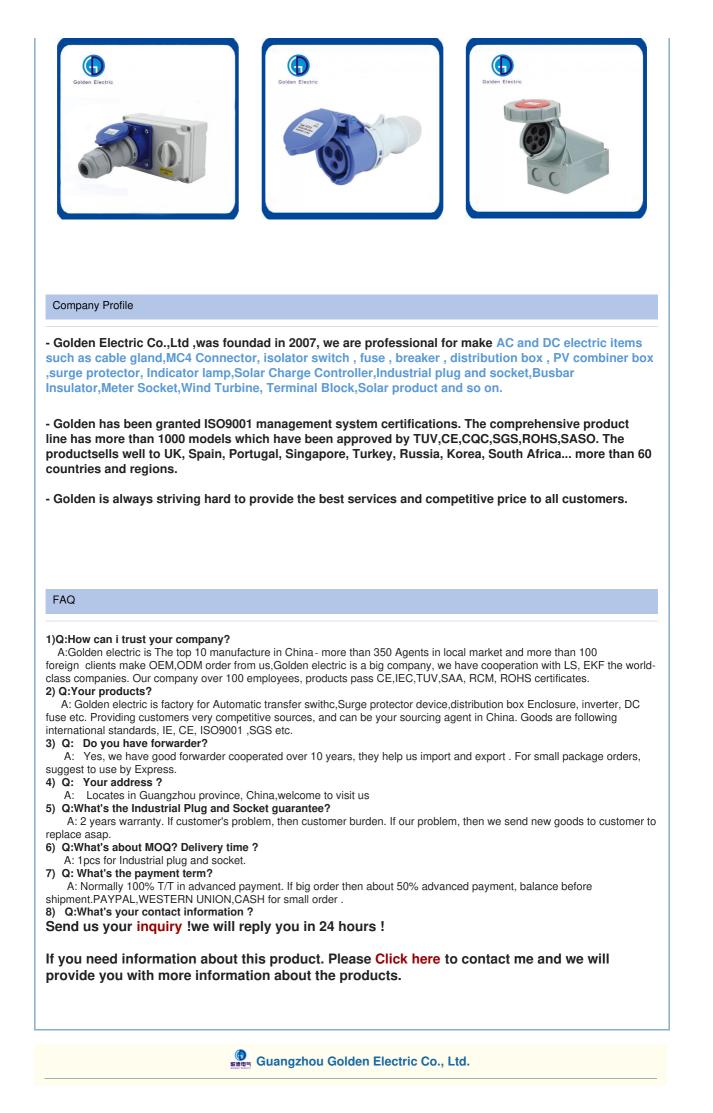

008618998498109



Chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District, Guangzhou city,Guangdong province,China