



Cjx2-D Series LC1-D50 LC1-D65 LC1-D80 LC1-D95 3 Pole AC Contactor Magnetic Contactor

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months
Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month



Product Specification

- Size: Miniature
- Model No.: Cjx2-D
- Transport Package: Standard Export Box
- Trademark: Golden Electric Or Customize
- Origin: China
- HS Code: 8543709990
- Supply Ability: 5000/Month
- Electricity Type: AC
- Number Of Pole: 3
- Phase: 3
- Main Circuit Rating Voltage: 24V-440V
- Main Circuit Rating Current: 100A
- Type: Ac Contactors
- Samples: US\$ 10/Piece 1 Piece(Min.Order) | Request Sam



More Images



for more products please visit us on chinagoldene.com

Product Description

Product Description



CJX2-D09/12/18
(LC1-D09/12/18)



CJX2-D25
(LC1-D25)



CJX2-D32
(LC1-D32)



CJX2-D40/50/65/80/95
(LC1-D40/50/65/80/95)



Golden Electric



CJX2-D series AC Contactor is suitable for using the circuit up to rated voltage 660V 50Hz or 60Hz rated current up to 620A, for making, breaking, frequently starting & controlling the A motor.

Combined with the auxiliary contact block timer delay & machine-interlocking device etc it becomes the delay contact mechanical interlocking contactor, star-delta starter. With the thermal relay it is combined into the electromagnetic starter. The products comply with IEC 60947-4 EN standard.



Golden Electric



Product Parameters

Type		LC1-D09	LC1-D12	LC1-D18	LC1-D25	LC1-D32
Rated working current (A)	AC3	9	12	18	25	32
	AC4	3.5	5	7.7	8.5	12
Standard power ratings of 3-	220/230V	2.2	3	4	5.5	7.5
	380/400V	4	5.5	7.5	11	15

Standard power ratings of 3-


phase motors 50/60Hz incategory AC-3	415V	4	5.5	9	11	15
	500V	5.5	7.5	10	15	18.5
	660/690V	5.5	7.5	10	15	18.5
Rated heat current (A)		20	20	32	40	50
Electrical life	AC3 (x104)	100	100	100	100	80
	AC4 (x104)	20	20	20	20	20
Mechanical life (x104)		1000	1000	1000	1000	800
Number of the contacts		3P+NO				3P+NC+NO

Standard Control Circuit Voltage

Volts	24	42	48	110	220	230	240	380	400	415	440	500	600
50Hz	B5	D5	E5	F5	M5	P5	U5	Q5	V5	N5	R5	S5	Y5
60Hz	B6	D6	E6	F6	M6	-	U6	Q6	-	-	R6	-	-
50/60Hz	B7	D7	E7	F7	M7	P7	U7	Q7	V7	N7	R7	-	-

Dimension & Mounting Size(CJX2-D09~D95)

Type	A	B	C	D	E	a	b	c
CJX2-D09-12	47	76	82	113	133	34/35	50/60	4.5
CJX2-D18	47	76	87	118	138	34/35	50/60	4.5
CJX2-D25	57	86	95	126	146	40	48	4.5
CJX2-D32	57	86	100	131	151	40	48	4.5
CJX2-D40-65	77	129	116	145	165	40	100/110	6.5
CJX2-D80-95	87	129	127	175	195	40	100/110	6.5

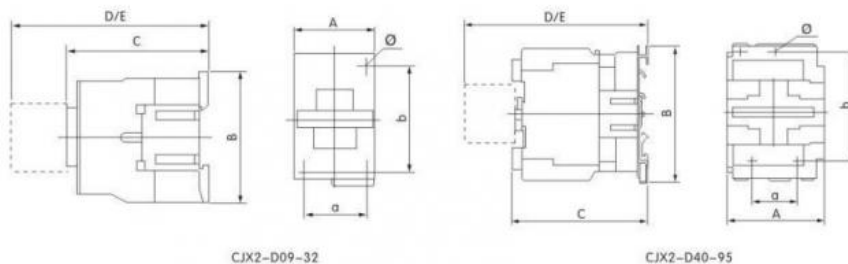

Other Hot-Selling Products





FAQ

Q1: Are you a factory or trading company

A1: We are a factory, we can guarantee our price is first-hand, very cheap and competitive.

Q2: How does your factory do regarding quality control?

A2: All the products will be 100% checked before the shipment

Q3: When can I get the price?

A3: Usually we quote within 24 hours after we get your inquiry.

Q4: How could I get a sample?

A4: if you can not buy our product in your local area, we will ship a sample to you. You will be charged a sample price plus all related shipping costs. Express delivery charge depends on the quantity of the samples.

Q5: What is the price of shipping?

A5: Depending upon the port of delivery, prices vary.

Any more query please contact with us, thank you!



Guangzhou Golden Electric Co., Ltd.



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,
Guangzhou city, Guangdong province, China