

Electric Multifunctional Time Relay with Timing Range Na-Ne Different Range

Basic Information

Place of Origin: China

Brand Name: Golden Electric /OEM

• Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000,

ISO 20000, OHSAS/ OHSMS 18001,

IATF16949

Minimum Order Quantity:

• Packaging Details: Carton/Pallet

Delivery Time: Peak Season Lead Time: more than 12

months Off Season Lead Time: within 15

workdays

• Payment Terms: LC, T/T, PayPal, Western Union

Supply Ability: 5000/Month



Product Specification

• Size: Miniature

Type: Non-Electric Parameter Relay

Working Power: AC24V/36V/110V/220V/380V

DC24V/110V/220V

Timing Range: Na-Ne Different Range
 Contact Capacity: 3A-250V (Resistive)
 Contact Qty: 2 Set Delay Contact

Transport Package: Carton Box

• Trademark: Golden Electric Or Customize

Origin: China
HS Code: 8537209000
Supply Ability: 5000/Month
Theory: Time Relay

• Usage: Household Appliances Relay, Lathe Relay,

Time Delay

76---- 4



More Images









Product Description

Product Description

Timer relay used as time delay component in the control circuit with AC 50Hz, AC 220V and below or DC 24V, to connect or disconnect the circuit at preset time.

With compact size, light weight, high accuracy, wide time delay range, high quality performance, can be widely used for time delay control in automation control circuit, this series relay can be interchange with JSZ3 type relay.

Product Parameters

Features:

2C

act

- *Used for control of time order
- *With front-surface and back-surface connecting sockets
- *LED pilotdisplay action state

```
Classificati Multi Range Twin Timer
                                                     Twin Timer
          Timer
on
Specificati
          AH2-N/Y
                     ATDV-N
                                                     ATDV-Y
on Model
          61H×49W×7
          0D
Dimension 88H×58W×6 61H×49W×70D
                                                     88H×58W×68D
          8D
Moun Surf PF ting & -N)
          PF083A PS- P2CF-08 PS-08
                                                     PF083A
Sock Flus US-08 P3G- PF083A
                                                     US-08 P3G-08
     h(-Y) 08
          A:
          1S,10S,1M,
          10M
          B:
          3S,30S,3M,
          30M
                     6S×6S,6S×60S,
                                                     6S×6S.6S×60S, 30S×30S, 30S×60S
                     60S×6S,60S×60S,
          C:
Full Timing 6S,60S,6M, 6M×6M,6M×60M,
                                                     60S×6S,60S×60S, 6M×6M,6M×60M,
                                                     60M×6M,60M×60M, Longest time
          60M
                     60M×6M,60M×60M, Longest time
                                                     12Hours upon clients' request
                     12Hours upon clients' request
          D:
          1M,10M,1H,
          10H
          E:
          3M,30M,3H,
          30H
          AC:
Rated
          12,24,110,2
                     AC: 12,24,110,220,240 50/60Hz
                                                     AC: 12,24,110,220,240 50/60Hz DC:
Voltage
          20, 240
                     DC: 12,24
                                                     12,24
(V)
          50/60Hz
          DC: 12,24
          ON-UP Two
Indicator
          Indicator
                     ON,OFF Operating
                                                     ON,OFF Operating
Operating
          Lamp
     Mod AH2-N-
                     ATDV-N
                                                     ATDV-Y
          /AH2-Y-
     el
     Time
     Limit 5A
                     5A
                                                     5A
     1C
O/P Time
Cont Limit
```

Insta ntan eous 5A 1C Mec hanic 5×106 Times 5×106 Times 5×106 Times Life al Elect 105 Times 105 Times 105 Times rical Repe at ±1% max ±1% max ±2% max Error Setti ng ±10% max ±10% max ±20% max Accu Error racy Volta ge ±1% max ±1% max ±1% max Error Tem p ±2% max ±2% max ±2% max Error Reset 0.1 sec max 0.2 sec max 0.2 sec max Time Consumed 3VA 3VA 3VA Power Ambient temperatur 10oC~+55o -10oC~+55oC -10oC~+55oC Ambient 48~85% RH 48~85% RH 48~85% RH Huminity Weight 220g 160g 210g

Voltage DC12V-48V AC24V-220V50HZ

Powerexpend DC1.0W AC1.0VA

Control output 5A220VAC

Insulation Resistance DC500V 100M Ω


Dielectric Strength BCC1500VAC BOC1000VAC

OperatingTemperature -10°C~50°C
Huminity 35%-85%
Weight 160g
InstallingHolingSize 50x62mm

时间范围 Time range

AH2-YA	15,1M,10S,10M	
AH2-YB	3S,3M,30S,30M	
AH2-YC	1M,10M,1H,10H	
AH2-YD	3M,30M,3H,30H	
AH2-YE	6S,6M,60S,60M	

外形图、接线图、延时波形 Dimension.Bottom View

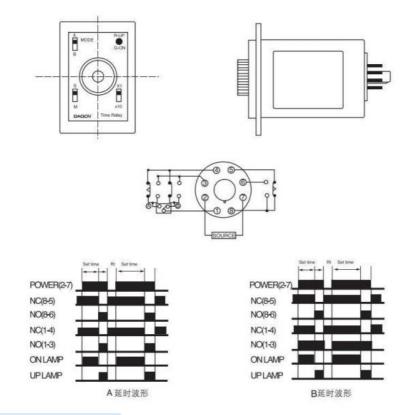

Provide you with many

options













Company

Profile

- Golden Electric Co.,Ltd ,was foundad in 2017, we are professional for make AC and DC electric items such as cable gland, isolator switch , fuse , circuit breaker , distribution box , PV combiner box ,surge protector, Industrial plug and socket,Solar product etc.

- Golden has been granted ISO9001 management system certifications. The comprehensive product line has more than 1000 models which have been approved by TUV,CE,CQC,SGS,ROHS,SASO. The productsells well to UK, Spain, Portugal, Singapore, Turkey, Russia, Korea, South Africa... more than 60 countries and regions.
- Golden is always striving hard to provide the best services and competitive price to all customers.

FAQ

1) Q:How can i trust your company?

A:Golden electric is The top 10 manufacture in China - more than 350 Agents in local market and more than 100 foreign clients make OEM,ODM order from us,Golden electric is a big company, we have cooperation with LS, EKF the world-class companies. Our company over 100 employees, products pass CE,IEC,TUV,SAA, RCM, ROHS certificates.

2) Q:Your products?

A: Golden electric is factory for Junction Box, Isolator Switch, Automatic transfer switch, Surge protector device, distribution box Enclosure, inverter, DC fuse etc. Providing customers very competitive sources, and can be your sourcing agent in China. Goods are following international standards, IE, CE, ISO9001 ,SGS etc.

3) Q: After Sales Service?

A: We will provide the best After-sales Service

4) Q: What's the payment term?

A: Normally 100% T/T in advanced payment. If big order then about 50% advanced payment, balance before shipment.PAYPAL,WESTERN UNION,CASH for small order.

5) Q: Your address?

A: Locates in Guangzhou province, China, welcome to visit us

Any more query please contact with us, thank you!





008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District, Guangzhou city, Guangdong province, China