



## Solar PV DC 1000V Fuse And Fuse Holder 1phase 38mm With Gross Weight 1.000kg

Our Product Introduction

### Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months  
Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month



### Product Specification

- Type: Auto Fuse Holder
- Shape: Square
- Size Of Fuse: Trumpet Fuse Holder
- Form Of Installation: Insurance Piece Holder
- Environmental Protection: Environmental Protection Fuse Holder
- Execution Standard: National Standard
- Fusing Speed: F
- Brand: Industrial
- Rated Current: 1~30A
- Connection(mm): 2.5-10
- Working Temperature: "-5" To "+40"
- Fuse Dimension: 10\*38mm
- Rated Voltage: 1000VDC
- Standard: High Quality CE&TUV Certificate
- Biggest Break Ability: 33ka



### More Images



for more products please visit us on [chinagoldene.com](http://chinagoldene.com)

## Product Description

## Product Description

## Solar PV DC 1000V Fuse 1Phase 10x38mm with Fuse Holder Box



**1.**A range of 10x38mm fuse links specifically designed for protecting photovoltaic strings. These fuse links are capable of interrupting low overcurrents associated with faulted photovoltaic string arrays (reverse current, multi-array fault).

**2.**DC Fuse mainly used in DC combiner box in solar PV systems. When PV panel or inverter caused overload or short circuit, it trip off immediately, to protect PV panels, DC fuse also used to protect other electrical parts in DC circuit, when overload or short circuit.

## Product Parameters

Type	GD-20
Fuse size	10 x 38MM
Poles	1P
Rated voltage	DC 1000V
Rated current	1,2,3,4,5,6,8,10,12,15,20,25,30A
Short-circuit breaking capacity	33KA
Max power attenuation	3.5W
Protection grade	IP20
Connection	2.5-10mm <sup>2</sup>
Operation ambient temperature	-30~+70°C
Resistance and damp hot	Class 2
Elevation	≤ 2000
Installation way	TH35-7.5/DIN35 Rail installation
RH(relative air humidity)	when +20 °C,not exceed 95%;when +40 °C,not exceed 50%
Pollution class	3
Installation environment	the place of no obvious vibrate & impact
Installation class	≡
WxHxL	W18 x H89 x L90mm
Weight(kg)	0.07



## High quality fuse holder

Flame retardant shell with V0 standard.  
High power frequency withstand voltage  
Withstand high breaking capacity  
High heat resistance


## Superior fuse

High breaking capacity  
The fuse is pure silver and the filler  
is high silica quartz sand (98% or more sio<sub>2</sub>)



## Multiple certifications

CE.TUV.CCC.UL certification to use more  
assured

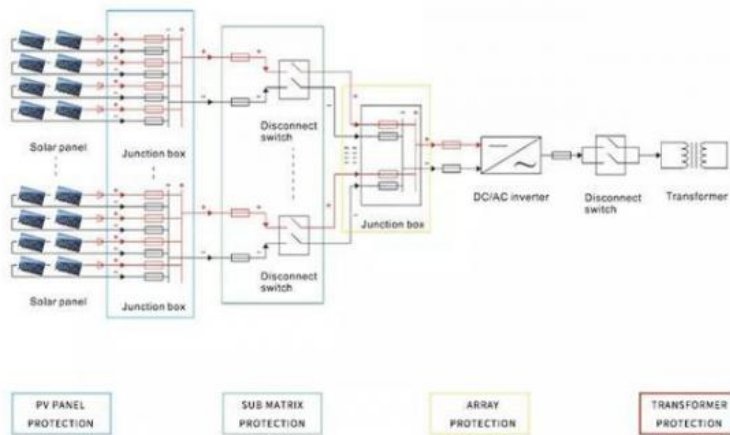

## Solar PV System



If you are interested in our products , please feel free to contact with us ,we will try our best to meet your demand.

### Packaging & Shipping

#### DC Solar Fuse Package:

Standard export carton packing.

#### DC Solar Fuse Delivery Time:

3-15 days after confirming order,detail delivery date should be decided according to production season and order quantity.

#### DC Solar Fuse Shipping:

1. By Air or by Sea for batch goods,Airport/ Port receiving;
2. Customers specifying freight forwarders or negotiable shipping methods!



## Company Profile



- **Golden Electric Co.,Ltd** ,was foundad in 2017, we are professional for make **AC and DC electric items such as isolator switch , fuse , breaker , distribution box , PV combiner box ,surge protector, Industrial plug and socket,Solar product and so on.**

- Golden has been granted ISO9001 management system certifications. The comprehensive product line has more than 1000 models which have been approved by TUV,CE,CQC,SGS,ROHS,SASO. The productsells well to UK, Spain, Portugal, Singapore, Turkey, Russia, Korea, South Africa... more than 60 countries and regions.

- Golden is always striving hard to provide the best services and competitive price to all customers.



**Low voltage product:**  
 Auto/manual transfer switch  
 Power meter  
 Distribution box(plastic/metal)  
 Surger protector device  
 Mini /Moulded case circuit breaker  
 Insulator

Factory  
direct sale

Customize

High quality

Professional  
after-sales  
service



## FAQ

**Q: If I'm interested in your DC FUSE when I can receive your quotation and detail information after send the enquiry?**

**A:**All your enquiry will be replied in 24hours.

**Q:Your DC FUSE seems perfect but what's the difference between you and other suppliers? Because I find some cheaper price from others!**

A: Our DC FUSE are high quality customized.for solar system I think compare the quality first and then compare the price is the best way.

**Q:Can I get a sample before the order because I really don't how is your DC FUSE quality?**

A:Of course!We also think sample order is the best way to build the trust.

**Q:How's the delivery?Because I really need them is urgently?**

A:For sample order 3~7days will be no problem.And for regular order we promise in 15days.

**Q:How's the warranty period for your DC FUSE?**

A:We offer one year warranty for our customer.

### **How to contact us**

Send your Inquiry Details in the Below, please Click "Send" Now!

Good price and sample are waiting for you.



**Guangzhou Golden Electric Co., Ltd.**



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,  
Guangzhou city,Guangdong province,China