



Panel Mount Industrial Temperature Sensor Enclosure with Temperature Control Function

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months
Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month



Product Specification

- Environment Humidity: 5%-85%Rh
- Installation Method: Rail Installation
- Operating Voltage: AC/DC 24V-250V
- Output Signal: 10mA
- Dimensions: 84*43.5*17.5mm
- Control Type: Temperature
- Weight: 0.08kg
- Hole Size: 35mm
- Transport Package: Standard Export Carton
- Specification: 7T. 81-230/7T. 81-240
- Trademark: Golden Or Natural Or Customer Brand
- Origin: China
- HS Code: 90321000
- Supply Ability: 50000PCS /Week
- Customized: Non-Customized



More Images



for more products please visit us on chinagoldene.com

Product Description

Product Description

GD.81/240&GD.81/230

GD.81/240



GD.81/240: Thermostat (normally closed); contact breaker for regulating heaters. The contact opens when temperature is rising.

GD.81/230: Thermostat (normally open); contact maker for regulating of filter fans and heat exchangers or for switching signal devises when temperature limit has been exceeded. The contact closes when temperature is rising.

Application



Hot Product




Product Parameters


GD.81/240&GD.81/230

Switch temperature difference	+/-5°C
Sensor element	thermostatic bimetal
Contact type	snap-action contact
Service life	>100,000 cycles
Max. switching capacity	250VAC, 10 (2) A / 120VAC, 15 (2) A DC 30W at 24VDC to 72VDC
Max. inrush current	AC 16A for 10 sec.
Connection	2-pole terminal, clamping torque 0.5Nm max.: rigid wire 2.5mm ² (AWG 14) stranded wire ¹ 1.5mm ² (AWG 16)
Mounting	clip for 35mm DIN rail, EN 60715
Casing	plastic according to UL94 V-0, light grey
Dimensions	84*43.5*17.5mm
Weight	0.08(Kg)
Fitting positon	variable
Operating/Storage humidity	-45 to +80°C (-49 to +176°F)
Operating/Storage humidity	max. 90% RH

Product Size

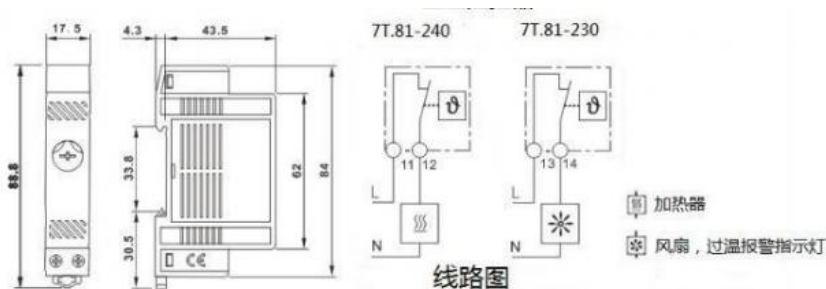

Product wiring diagram

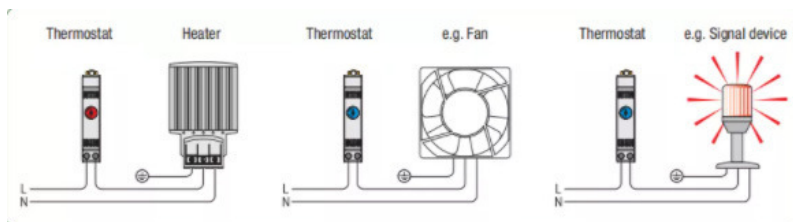

Order code:

Setting range	Ordering code Normally closed (NC) GD.81-240	Ordering code Normally open (NO) GD.81-230
0~ +60°C	GD.81-2403	GD.81-2303
-10~ +50°C	GD.81-2402	GD.81-2302
+20~ +80°C	GD.81-2404	GD.81-2304
+32~ +140°F	GD.81-2405	GD.81-2305
+14~ +122°F	GD.81-2406	GD.81-2306
-15~ +45°C	GD.81-2407	GD.81-2307
-20~ +40°C	GD.81-2401	GD.81-2301

Packaging & Shipping

Packaging Details:

Standard Export Package

Shipping:

1. By Air or by Sea for batch goods,Airport/ Port receiving;
2. Customers specifying freight forwarders or negotiable shipping methods!

Delivery Detail:

Shipped in 7 days after payment



Company Profile

- Golden Electric Co.,Ltd ,was foundad in 2017, we are professional for make AC and DC electric items such as **isolator switch** , **fuse** , **breaker** , **distribution box** , **PV combiner box** ,**surge protector**, **Industrial plug and socket**,**Solar product** and so on.

- Golden has been granted ISO9001 management system certifications. The comprehensive product line has more than 1000 models which have been approved by TUV,CE,CQC,SGS,ROHS,SASO. The productsells well to UK, Spain, Portugal, Singapore, Turkey, Russia, Korea, South Africa... more than 60 countries and regions.

- Golden is always striving hard to provide the best services and competitive price to all customers.





FAQ

Q:How and how long can I get a sample to check your quality?

A: After price confirmation, you can require for samples to check our quality. Then after you send us confirmed files, the samples will be ready for delivery in 7 days. The samples will be sent to you via express and arrive in 5-7 workdays.

Q:How to order our product ?

A: 1).Please tell us the model and quantity and other request you need.
2).We make the PI for you.
3).After you confirm the PI, we arrange the order for you after receiving your payment.
4).After the goods finished, we send the goods out to you and tell you the tracking number.
5).We will track your goods until you receive the goods.

Q: Can I have a visit to your factory before the order?

A: Welcome! Our factory address: Dongan Industrial Zone,Yueqing City, Wenzhou, Zhejiang, China (Mainland)

Q: What's your shipment method?

A: We ship by Express, by air, by sea, by train. Normally we checked and compare, then provide customer the most proper shipment method.

Q: What's about MOQ?

A: First order MOQ=1pcs

Q: If i want to release order, what's the payment method you accept ?

A: We accept T/T, Paypal, Western union, etc.

Q: If i want to release order, what's the process?

A: Thanks. You can send inquiry to us by alibaba, or send us by email, we will reply within 24hrs.

Our commitent

BETTER PRICE than other sellers for you because of Factory Direct Sale.
BETTER QUALITY than before caused by our 10+ years trading experience.
STOCK IN TRADE always own to our Fast & Professional production line.
FAST DELIVERY always made by our GROUP's Enthusiam.
TIMING REPLY in 24 hours all about our TEAM's Passion & Patience.
Send your Inquiry Details in the Below, **Click "Send" Now~**
YOUR BENEFITS IS OUR BUSINESS!!!



Guangzhou Golden Electric Co., Ltd.



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,
Guangzhou city,Guangdong province,China

