

Smart Thermostat for Controlling Gas Boiler Heating System Compact Design Lightweight

ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001,

Peak Season Lead Time: more than 12

LC, T/T, PayPal, Western Union

months Off Season Lead Time: within 15

Basic Information

- Place of Origin:
- Brand Name: Golden Electric /OEM

China

IATF16949

workdays

5000/Month

5%-85%Rh

Non-Customized

1

- Certification:
- Minimum Order Quantity:
- Packaging Details: Carton/Pallet
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

- Environment Humidity:
- Installation Method:
- Operating Voltage:
- Output Signal:
- Dimensions:
- Control Type:
- Weight:
- Hole Size:
- Transport Package:
- Specification:
- Trademark:
- Origin:
- HS Code:
- Supply Ability:
- Customized:
- Rail InstallationAC DC 24-250V10mA60*33*43mmTemperature0.03kg35mmStandard Export CartonGD-TC601/GD-TC602Golden Or Netural Or Customer BrandChina9032100050000PCS /Week



More Images









Product Description



Small size
Default temperature settings
Easy to install
High switching tolerance

Tamperproof(Pre-set)Thermostat FTO 011

Contact breaker/NC(red casing)for regulating heaters or for switching signal devices when temperature has fallen below the minimum value. The contact opens Wnen temperatu re is risina.

Tamperproof(Pre-set)Thermostat FTS 011

Contact maker(blue casing)for regulating filter fans,heat exchangers,cooling devices or for switching signal devices when temperature limit has been exceeded.The contact closes when temperature is rising.

Application




Hot Product




Product Parameters


Sensor element传感元件 Thermostatic bimetal恒温双金属片 Contact type触点类型 Snap-action contact快速动作接点	
Contact type触点类型 Snap-action contact快速动作接点	
Contact resistance触点电阻 <20mΩ	
Service life使用寿命 >100,000 cycles	
Max Switching capacity开关最大容量 250V AC, 5(1.6)A 120V AC, 10(2)A DC 30W	
Max inrush current开关最大电流 AC 10A	
EMC电磁兼容 acc to EN 55014-1-2. EN 61000-3-2. EN 61000-3-3	
Connection接线方式 2极接线端子。2.5mm2导线 2-pole terminal for 2.5mm2,torque 0.8Nm max	
Mounting安装方式 35mm DIN轨道 clip for 35mm DIN rail. EN60715 or for exit filter EF 118 Se	aries
Casing外壳材料 塑料UL94标准V-0防火等级, plastic according to UL9-	4 V-0 light grey
Dimensions外观尺寸 47×33×33mm	
Weight重量 Approx. 23g 大约23g	
Fitting position安装方式 Variable 任意	
Operating Strage temperature操作/储存温度 -20 to+80°C(-4 to+176°F)/-45 to+80°C(-49 to+176°F))
Protection type防护等级 IP20	

Size





Product wiring diagram

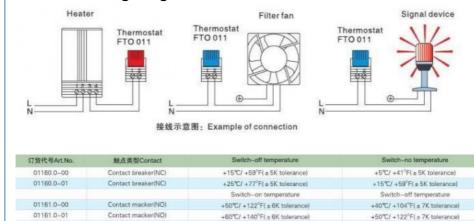

+35°C/ +95°F(±6K tolerance)

+25°C/ +77°F(± 7K tolerance)

Packaging & Shipping

Packaging Details:

Standard Export Package

Contact macker(NO)

Shipping:

01161.0-02

- 1. By Air or by Sea for batch goods, Airport/ Port receiving;
- 2. Customers specifying freight forwarders or negotiable shipping methods!

Delivery Detail:

Shipped in 7 days after payment



Company Profile

- Golden Electric Co.,Ltd ,was foundad in 2017, we are professional for make AC and DC electric items such as isolator switch , fuse , breaker , distribution box , PV combiner box ,surge protector, Industrial plug and socket,Solar product and so on.

- Golden has been granted ISO9001 management system certifications. The comprehensive product line has more than 1000 models which have been approved by TUV,CE,CQC,SGS,ROHS,SASO. The productsells well to UK, Spain, Portugal, Singapore, Turkey, Russia, Korea, South Africa... more than 60 countries and regions.

- Golden is always striving hard to provide the best services and competitive price to all customers.





Q:How and how long can I get a sample to check your quality?

A: After price confirmation, you can require for samples to check our quality. Then after you send us confirmed files, the samples will be ready for delivery in 7 days. The samples will be sent to you via express and arrive in 5-7 workdays.

Q:How to order our product ?

A: 1).Please tell us the model and quantity and other request you need.

2).We make the PI for you.

- 3).After you confirm the PI, we arrange the order for you after receiving your payment.
- 4). After the goods finished, we send the goods out to you and tell you the tracking number.

5).We will track your goods until you receive the goods.

Q: Can I have a visit to your factory before the order?

A: Welcome! Our factory address: Dongan Industrial Zone, Yueqing City, Wenzhou, Zhejiang, China (Mainland)

Q: What's your shipment method?

A: We ship by Express, by air, by sea, by train. Normally we checked and compare, then provide customer the most proper shipment method.

Q: What's about MOQ?

A: First order MOQ=1pcs

Q: If i want to release order, what's the payment method you accept ?

A: We accept T/T, Paypal, Western union, etc.

Q: If i want to release order, what's the process?

A: Thanks. You can send inquiry to us by alibaba, or send us by email, we will reply within 24hrs.

Our commitent

BETTER PRICE than other sellers for you because of Factory Direct Sale. BETTER QUALITY than before caused by our 10+ years trading experience. STOCK IN TRADE always own to our Fast & Professional production line. FAST DELIVERY always made by our GROUP's Enthusiam. TIMING REPLY in 24 hours all about our TEAM's Passion & Patience. Send your Inquiry Details in the Below, Click "Send" Now~ YOUR BENEFITS IS OUR BUSINESS!!!



008618998498109

eva@china-golden.com.cn

Chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District, Guangzhou city,Guangdong province,China