

660V 2.5mm2 Jf5 Series DIN Rail Mount Terminal Blocks for Wire Cable Connectors

ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001,

Peak Season Lead Time: more than 12

LC, T/T, PayPal, Western Union

Environmental Protection

Injection Molding

months Off Season Lead Time: within 15

Basic Information

- Place of Origin:
- Brand Name: Golden Electric /OEM

China

IATF16949

workdays

5000/Month

1

- Certification:
- Minimum Order Quantity:
- Packaging Details: Carton/Pallet
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

- Character:
- Production Process:
- Brand:
- Product Name:
- Rated Voltage:
- Wire Range:
- Rated Current:
- Contact Material:
- Product Model:
- Installation:
- Usage:

for more products please visit us on chinagoldene.com

- Transport Package:
- Trademark:
- Origin:
- HS Code:
- Golden Electric /OEM DIN Rail Type Terminal Block 660V 1.5mm2, 2.5mm2 17.5A, 24A Copper Fixed Terminal Strip Blocks DIN Rail Collecting Wires Standard Export Carton Golden Or Netural, Or Customer Brand China





More Images









Product Description

JF5 Series Terminals Block

The internationally recognized screw connection meets the most stringent requirements and covers a wide area of application. For the most stringent requirements: the screw connection has also proven itself in the wiring of large conductor cross section.


Characteristics:

- 1. Terminal: With universal mounting feet, can be installed on tracks NS32 or NS35.
- 2. Closed bolt leading hole will not only facilitate operation of screwd-rivers, also prevent the bolt from dropping out.
- 3. Made from engineering flame retardants nylon PA66 with brass screw metal.
- 4. It can connect two conductors with ease, even large conductor cross sections are not a problem.
- 5. Electric potential distribution can use fixed bridges in the terminal center or insertion bridges in the clamping space.
- 6. Two ends on the top with white marking system to realize uniformed sign.
- 7. Accessories: End cover, End Stopper, Partition plate, marker trip, fixed bridge, insertion bridge, etc.
- 8. 15 years lifetime.
- 9. OEM acceptable.

Product Parameters

Туре	JF5-2.5/3	Solid(AWG/mm ²)	UL 24-12, IEC 0.2-2.5			
Rated voltage	UL 600V,IEC 660V	Flexible(AWG/mm ²)	UL 24-12, IEC 0.2-2.5			
Rated current	UL 20A,IEC 25A	Installation Method	DIN Rail Mounted			
Housing thickenss	37mm	Package Quantity	50 Pieces			
Material	UL94 V1,Nylon PA66 Housing + Alloy Copper + Nickel-plated Screws					

Detailed Photos

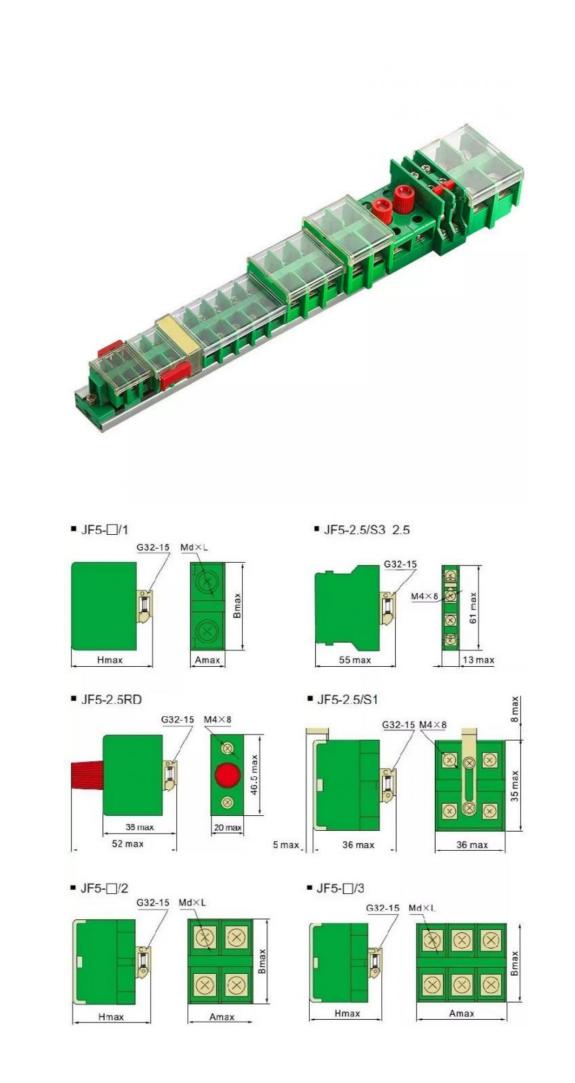

产品名称	额定在	额定截面			节数			类型	
JF5									
	1			1			ł		
	C:1.5mm ² D:2.5mm ² H:6mm ² K:10mm ² M:25mm ²			1:1节 2:2节 5:5节			RD:熔断型 S3:试验型		
	额定电 额定电	接点	外形及安装尺寸(n		m)	接线螺钉			
选型指南	压(V)	流(A)	对数	图号		A max	B max	Mdxl	
JF5-1.5/1	660	17.5	1	1	39	18.5	30	3×7	
JF5-2.5/1	660	24	1	1	41	10.5	35	4×8	
JF5-2.5/s1	660	24	1	4	42.5	36	35	4×8	
JF5-2.5/s2	660	24	1	4	41	12	41	4×8	
JF5-2.5/s3	660	24	1	2	55	11	61	4×8	
JF5-2.5RD	660	24	1	3	52	20	47	4×8	
JF5-4/1	660	30	1	1	35	12.5	40	4×8	
JF5-6/1	660	41	1	1	42	15	45	5×10	
JF5-10/1	660	57	1	1	49	17	50	6×12	
JF5-25/1	660	100	1	1	54	25	60	8×14	
JF5-1.5/2	660	17.5	2	5	31	20	30	3×8	
JF5-2.5/2	660	24	2	5	32	25	35	4×8	
JF5-10/2	660	57	2	5	49	38	50	6×12	
JF5-25/2	660	100	2	5	48	48	60	8×14	
JF5-1.5/3	660	17.5	3	6	31	29	31	3×6	
JF5-2.5/3	660	24	3	6	32	36	35	4×8	
JF5-6/2	660	41	5	6	42	44	44	5×10	
JF5-1.5/5	660	17.5	5	7	31	46.5	31	3×7	
JF5-2.5/5	660	24	5	7	32	59	35	4×8	
JF5-4/5	660	30	5	7	32	67	41	4×8	
JF5-6/5	660	41	5	7	43	80	45	5×10	
JF5-10/5	660	57	5	7	50	92	50	6×12	
JF5-25/5	660	100	5	7	50	114	60	8×14	

Recommand Product



Company Profile

- Golden Electric Co.,Ltd ,was foundad in 2007, we are professional for make AC and DC electric items such as cable gland,MC4 Connector, isolator switch , fuse , breaker , distribution box , PV combiner box ,surge protector, Indicator lamp,Solar Charge Controller,Industrial plug and socket,Meter Socket,Wind Turbine, Terminal Block,Solar product and so on.

- Golden has been granted ISO9001 management system certifications. The comprehensive product line has more than 1000 models which have been approved by TUV,CE,CQC,SGS,ROHS,SASO. The productsells well to UK, Spain, Portugal, Singapore, Turkey, Russia, Korea, South Africa... more than 60 countries and regions.

- Golden is always striving hard to provide the best services and competitive price to all customers.

FAQ

1)Q:How can i trust your company?

A:Golden electric is The top 10 manufacture in China - more than 350 Agents in local market and more than 100 foreign clients make OEM,ODM order from us,Golden electric is a big company, we have cooperation with LS, EKF the world-class companies. Our company over 100 employees, products pass CE,IEC,TUV,SAA, RCM, ROHS certificates. 2) Q:Your products?

A: Golden electric is factory for Automatic transfer swithc, Surge protector device, distribution box Enclosure, inverter, DC fuse etc. Providing customers very competitive sources, and can be your sourcing agent in China. Goods are following international standards, IE, CE, ISO9001, SGS etc.

3) Q: Do you have forwarder?

A: Yes, we have good forwarder cooperated over 10 years, they help us import and export . For small package orders, suggest to use by Express.

4) Q: Your address ?

- A: Locates in Guangzhou province, China, welcome to visit us
- 5) Q:What's the Terminal Block guarantee?

A: 2 years warranty. If customer's problem, then customer burden. If our problem, then we send new goods to customer to replace asap.

 6) Q:What's about MOQ? Delivery time ? A: 1pcs for Terminal Block. 7) Q: What's the payment term? A: Normally 100% T/T in advanced payment. If big order then about 50% advanced payment, balance before shipment.PAYPAL,WESTERN UNION,CASH for small order . 8) Q:What's your contact information ? Send us your inquiry !we will reply you in 24 hours ! 					
Guangzhou Golden Electric Co., Ltd.					
C 008618998498109 eva@china-golden.com.cn C chinagoldene.com					
Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District, Guangzhou city,Guangdong province,China					