



Red Copper and Fire-Resistant PVC Material Details 2 Phase Fork Bus Bar with Competitive

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month






Product Specification

- Material Details: Red Copper And Fire-Resistant PVC
- Character: Environmental Protection
- Transport Package: Standard Export Carton
- Specification: Pin Fork C45 1p 2p 3p 4p
- Trademark: Golden Electric Or Customize
- Origin: China
- HS Code: 8543709990
- Supply Ability: 5000/Month
- Certification: CE, TUV, ISO9001, BS, VDE
- Model: Fork Type
- Shape: Pin Busbar
- Type: MCB
- Interface Type: AC/DC
- Application: PCB, Combiner Box
- Samples: US\$ 1/Piece 1 Piece(Min.Order) | Request



More Images




for more products please visit us on chinagoldene.com


Product Description

Product Description


Terminal Block Connector Pure Copper Busbar is used for kinds of circuit breaker, copper busbar ease wiring electrical item, enlarge area, decrease temperature rise and thus increase the electric reliability of electrical items.

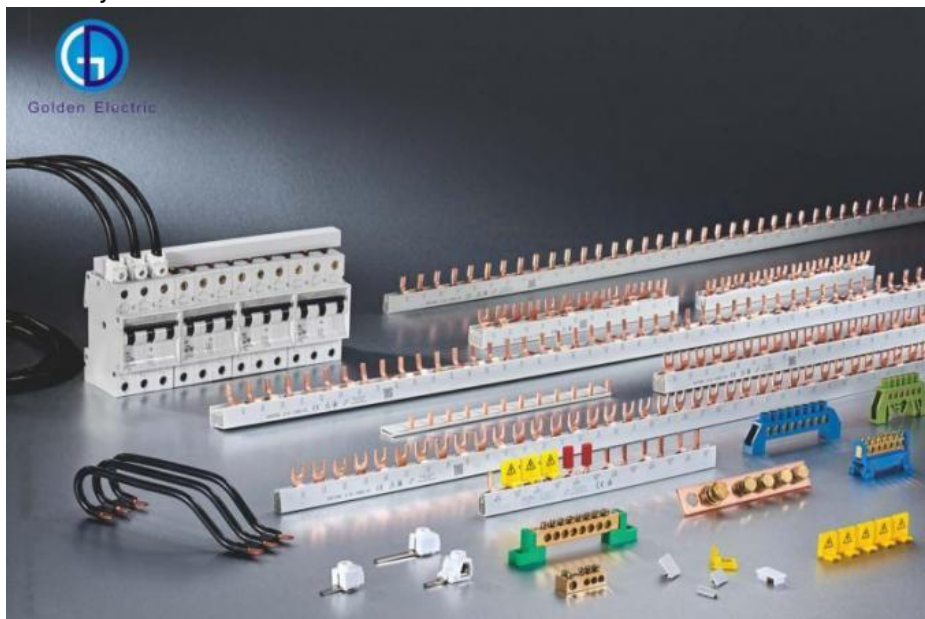

Fork Type 2-Phase busbar(M6)

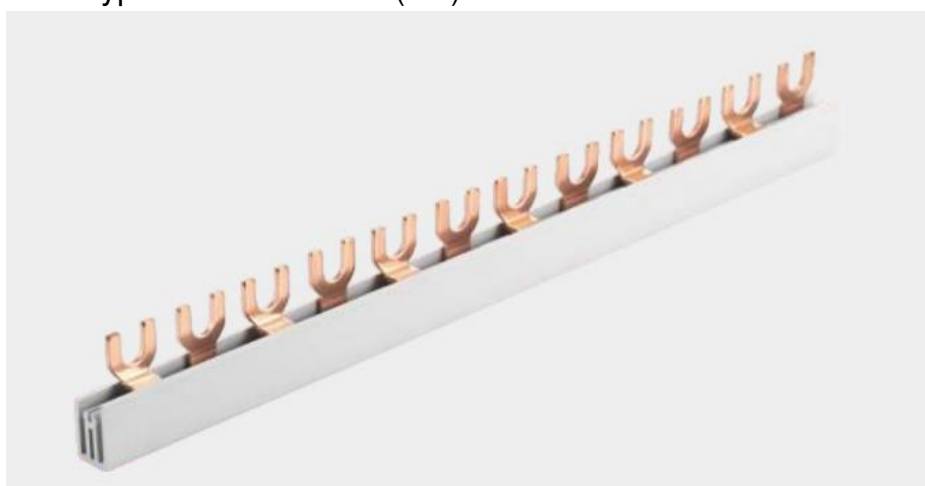

Description	Article No.	A Cross Section	B Distance (mm)	C Width of Fork (mm)	D Length of Fork (mm)	E Modules	F Length (mm)	G Reference Current
F-2L-210/8	KF21208	8mm ²	17.8	12	12	12	210	50A
F-2L-210/10	KF21210	10mm ²	17.8	12	12	12	210	63A
F-2L-210/13	KF21213	13mm ²	17.8	12	12	12	210	70A
F-2L-210/16	KF21216	16mm ²	17.8	12	12	12	210	80A
F-2L-1000/8	KF25408	8mm ²	17.8	12	12	54	1000	50A
F-2L-1000/10	KF25410	10mm ²	17.8	12	12	54	1000	63A
F-2L-1000/13	KF25413	13mm ²	17.8	12	12	54	1000	70A
F-2L-1000/16	KF25416	16mm ²	17.8	12	12	54	1000	80A
F-2L-1016/8	KF25608	8mm ²	17.8	12	12	56	1016	50A
F-2L-1016/10	KF25610	10mm ²	17.8	12	12	56	1016	63A
F-2L-1016/13	KF25613	13mm ²	17.8	12	12	56	1016	70A
F-2L-1016/16	KF25616	16mm ²	17.8	12	12	56	1016	80A

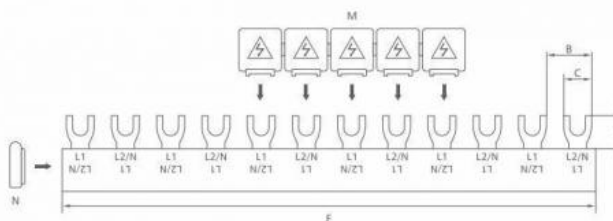

Busbar Series


Product Parameters

Description	Article No.	A	B	C	D	E	F	G
		Cross Section	Distance (mm)	Width of Fork (mm)	Length of Pin (mm)	Modules	Length(mm)	Reference Current
F-2L-210/8	KG21208	8mm ²	17.8	11	13.5	12	210	50 A
F-2L-210/10	KG21210	10mm ²	17.8	11	13.5	12	210	63 A
F-2L-210/13	KG21213	13mm ²	17.8	11	13.5	12	210	70 A
F-2L-210/16	KG21216	16mm ²	17.8	11	13.5	12	210	80 A
F-2L-1000/8	KG25408	8mm ²	17.8	11	13.5	54	1000	50 A
F-2L-1000/10	KG25410	10mm ²	17.8	11	13.5	54	1000	63 A
F-2L-1000/13	KG25413	13mm ²	17.8	11	13.5	54	1000	70 A
F-2L-1000/16	KG25416	16mm ²	17.8	11	13.5	54	1000	80 A
F-2L-1016/8	KG25608	8mm ²	17.8	11	13.5	56	1016	50 A
F-2L-1016/10	KG25610	10mm ²	17.8	11	13.5	56	1016	63 A
F-2L-1016/13	KG25613	13mm ²	17.8	11	13.5	56	1016	70 A
F-2L-1016/16	KG25616	16mm ²	17.8	11	13.5	56	1016	80 A


Technical features of copper busbar :

1. Material is of fire-resistant PVC and red copper
2. Current rating is up to 100A
3. Rated voltage is up to 415V
4. Applicable ambient temperature -25~+50
5. Standard length 1m, other length to be made upon request.
6. Good conductivity, low contact resistance, safe and reliable.

Other models or customized

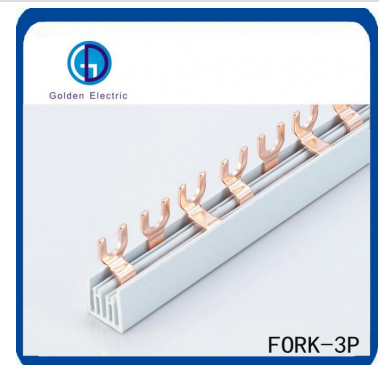

Customized busbar

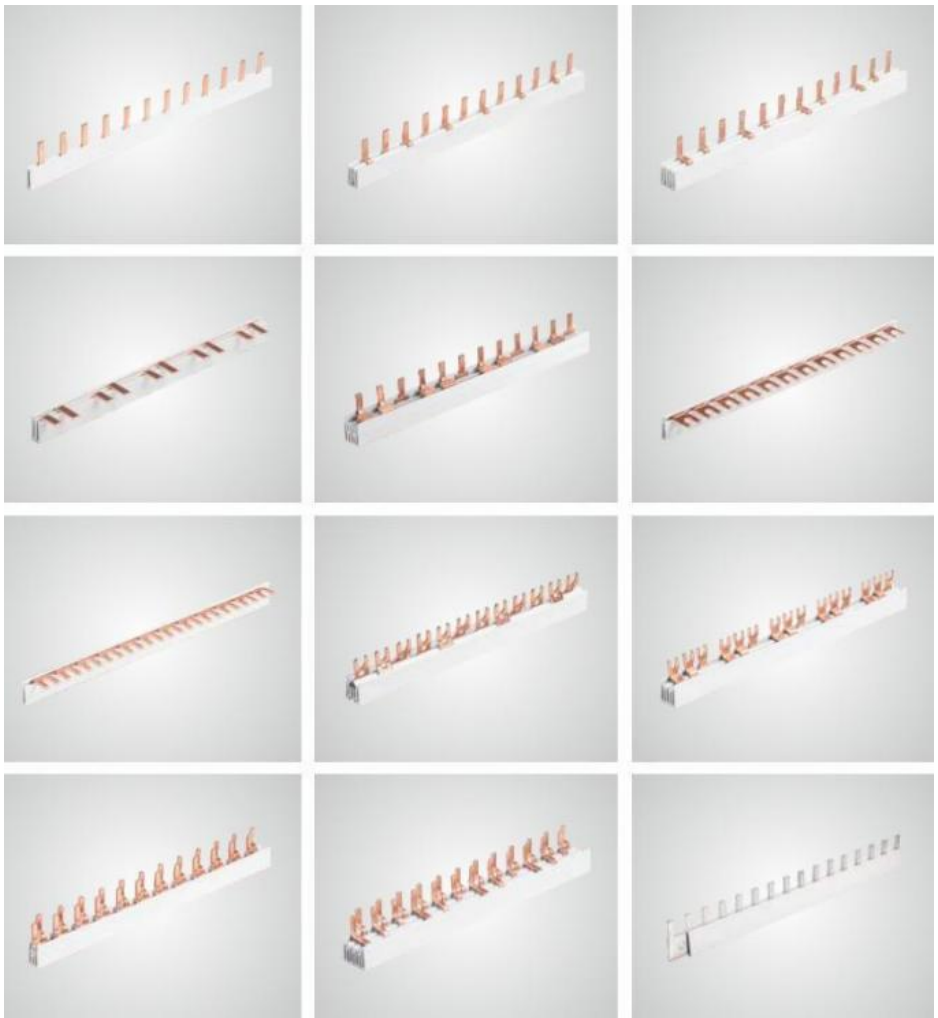

End caps



Description	Pole	Article No.
EK1-10	1P	EK110
EK1-16	1P	EK116
EK2-10/16	2P	EK21016
EK3-10/16	3P	EK31016
EK4-10/16	4P	EK41016

Description	Pole	Article No.
EK1-10/16E	1P	EK11016E
EK2-10E	2P	EK210E
EK2-16E	2P	EK216E
EK3-10E	3P	EK310E
EK3-16E	3P	EK316E
EK4-10E	4P	EK410E
EK4-16E	4P	EK416E

Description	Pole	Article No.
EK3-10D	3P	EK310D

Package: International standard packaging

Transport method : support multiple modes of such as sea, land and air



Buyer: If we need some sample, whether you can supply?

Seller: Yes, we can.

Buyer: Our current is 63A, is ok?

Seller: Our max current is 125A. the current is less than 125A, is ok.

Buyer: Can we use our LOGO?

Seller: Yes, we can use your LOGO and company information

Buyer: Fork type copper busbar is U type copper busbar?

Seller: Yes. it's the same. You can choose fork type copper busbar according to your requirements.



Guangzhou Golden Electric Co., Ltd.



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,
Guangzhou city, Guangdong province, China