

# Full Cover Pin/Fork Copper Bus Bar for Customized Request and AC/DC Interface Type

ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001,

Peak Season Lead Time: more than 12

LC, T/T, PayPal, Western Union

months Off Season Lead Time: within 15

## **Basic Information**

- Place of Origin:
- Brand Name: Golden Electric /OEM

China

IATF16949

workdays

5000/Month

1

- Certification:
- Minimum Order Quantity:
- Packaging Details: Carton/Pallet
- Delivery Time:
- Payment Terms:
- Supply Ability:



### Product Specification

- Material Details:
- Character:
- Transport Package:
- Specification:
- Trademark:
- Origin:
- HS Code:
- Supply Ability:
- Certification:
- Model:
- Shape:
- Type:
- Interface Type:
- Application:
- Samples:
- Red Copper And Fire-Resistant PVC Environmental Protection Standard Export Carton Pin Fork C45 1p 2p 3p 4p Golden Electric Or Customize China 8543709990 5000/Month CE, TUV, ISO9001, BS, VDE C45 Pin Busbar MCB AC/DC PCB, Combiner Box

US\$ 1/Piece 1 Piece(Min.Order) | Request




#### More Images










Our Product Introduction

#### Product Description

Terminal Block Connector Pure Copper Busbar is used for kinds of circuit breaker, copper busbar ease wiring electrical item, enlarge area, decrease temperature rise and thus increase the electric reliability of electrical items.

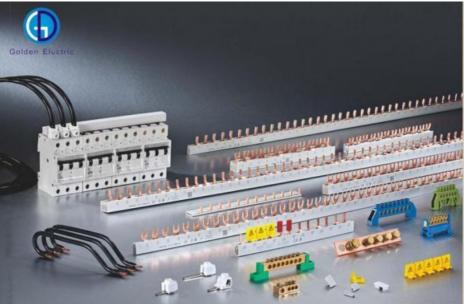


Pin type 3-phase busbar(C45)



specification	model A BCD E Cross sectional area	a Referance amp
C45	1 pole 1.569 17.811.513mm2	32A 40A 63A 80A
C45	1 pole 1.56 9 17.811.516mm2	100A
C45	2 pole 1.56 9 17.811.513mm2	32A 40A 63A 80A
C45	2 pole 1.56 9 17.811.516mm2	100A
C45	3 pole 1.56 9 17.811.513mm2	32A 40A 63A 80A
C45	3 pole 1.56 9 17.811.516mm2	100A
C45	4 pole 1.56 9 17.811.513mm2	32A 40A 63A 80A
C45	4 pole 1.56 9 17.811.516mm2	100A

Description	Article No.	A Cross Section	B Bistance (mm)	C Width of Pin(mm)	D Length of Pin(mm)	E Moduies	F Length (mm)	G Reference Current
C-3L-210/8	KC31208	8mm²	17.8	5.5	11.5	12	210	50A
C-3L-210/10	KC31210	10mm <sup>2</sup>	17.8	5,5	11.5	12	210	63A
C-3L-210/13	KC31213	13mm <sup>2</sup>	17.8	5.5	11.5	12	210	70A
C-3L-210/16	KC31216	16mm <sup>2</sup>	17.8	5.5	11.5	12	210	80A
C-3L-1000/8	KC35408	8mm <sup>2</sup>	17.8	5,5	11.5	54	1000	50A
C-3L-1000/10	KC35410	10mm <sup>2</sup>	17.8	5.5	11.5	54	1000	63A
C-3L-1000/13	KC35413	13mm <sup>2</sup>	17.8	5.5	11.5	54	1000	70A
C-3L-1000/16	KC35416	16mm <sup>2</sup>	17.8	5,5	11.5	54	1000	80A
C-3L-1016/8	KC35708	8mm <sup>2</sup>	17.8	5.5	11.5	57	1016	50A
C-3L-1016/10	KC35710	10mm <sup>2</sup>	17.8	5.5	11.5	57	1016	63A
C-3L-1016/13	KC35713	13mm <sup>2</sup>	17.8	5.5	11.5	57	1016	70A
C-3L-1016/16	KC35716	16mm <sup>2</sup>	17.8	5.5	11.5	57	1016	80A




Technical features of copper busbar :

- 1. Material is of fire-resistant PVC and redl copper
- 2. Current rating is up to 100A
- 3. Rated voltage is up to 415V
- 4. Applicable ambient temperature -25~+50
- 5. Standard length 1m, other length tol be made upon request.
- 6. Good conductivity, low contact resistance, safe and reliable.


Other models or customized







Customized busbar

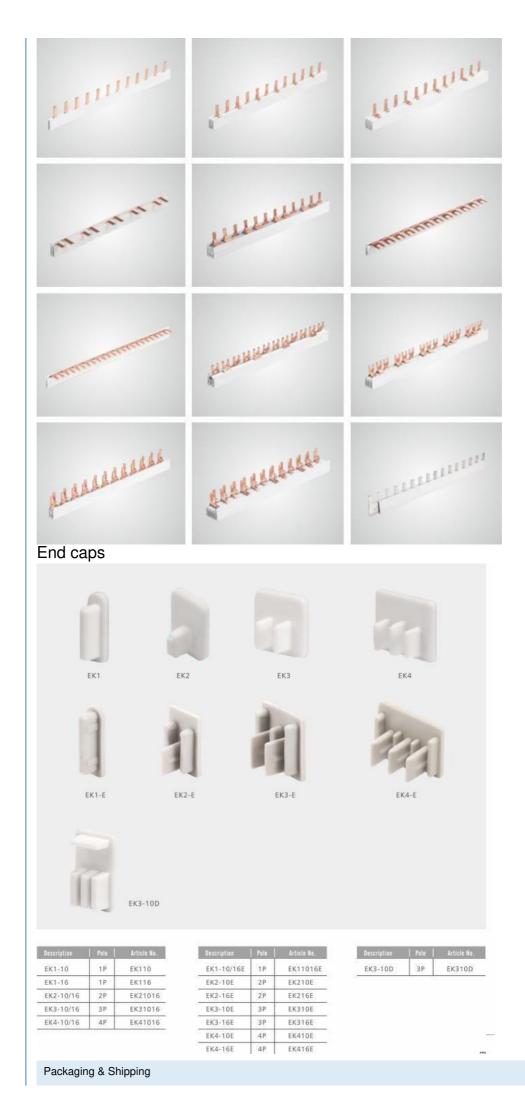



Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District, Guangzhou city,Guangdong province,China