

MCB Copper Busbar Terminal Block Connector with U or Fork Type and ISO9001 Certification

Basic Information

Place of Origin: China

Brand Name: Golden Electric /OEM

• Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000,

ISO 20000, OHSAS/ OHSMS 18001,

IATF16949

Minimum Order Quantity:

Packaging Details: Carton/Pallet


Delivery Time: Peak Season Lead Time: more than 12

months Off Season Lead Time: within 15

workdays

• Payment Terms: LC, T/T, PayPal, Western Union

Supply Ability: 5000/Month



Product Specification

Material Details: Red Copper And Fire-Resistant PVC

Character: Environmental Protection
 Transport Package: Standard Export Carton
 Specification: Pin Fork C45 1p 2p 3p 4p
 Trademark: Golden Electric Or Customize

Origin: ChinaHS Code: 8543709990Supply Ability: 5000/Month

Certification: CE, TUV, ISO9001, BS, VDE

Model: Fork Type
Shape: Pin Busbar
Type: MCB
Interface Type: AC/DC

Application: PCB, Combiner Box

• Samples: US\$ 1/Piece 1 Piece(Min.Order) | Request



More Images











Product Description

Terminal Block Connector Pure Copper Busbar is used for kinds of circuit breaker, copper busbar ease wiring electrical item, enlarge area, decrease temperature rise and thus increase the electric reliability of electrical items.

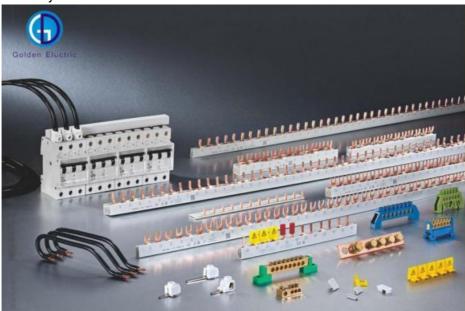


Fork Type 4-Phase busbar(M6)

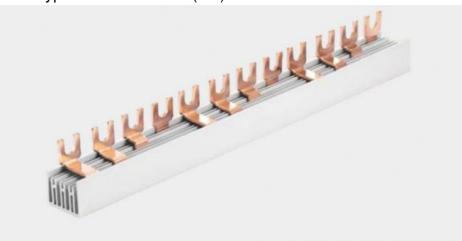

Description					D Length of Fork(mm)	E Modules	f Length (mm)	
F-4L-210/8	KF41208	8mm²	17.8	12	12	12	210	50A
F-4L-210/10	KF41210	10mm²	17.8	12	12	12	210	63A
F-4L-210/13	KF41213	13mm ²	17.8	12	12	12	210	70A
F-4L-210/16	KF41216	16mm²	17.8	12	12	12	210	80A
F-4L-1016/8	KF45608	8mm²	17.8	12	12	56	1016	50A
F-4L-1016/10	KF45610	10mm²	17.8	12	12	56	1016	63A
F-4L-1016/13	KF45613	13mm ²	17.8	12	12	56	1016	70A
F-4L-1016/16	KF45616	16mm ²	17.8	12	12	56	1016	80A







Technical features of copper busbar:

- 1. Material is of fire-resistant PVC and redl copper
- 2. Current rating is up to 100A
- 3. Rated voltage is up to 415V
- 4. Applicable ambient temperature -25~+50
- 5. Standard length 1m, other length tol be made upon request.
- 6. Good conductivity, low contact resistance, safe and reliable.


Other models or customized







customized busbar

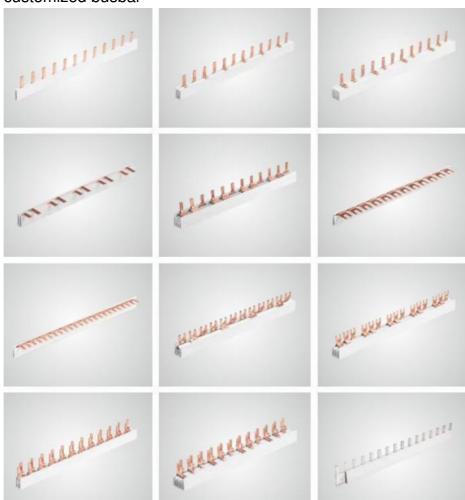

End caps



Description	Pole	Article No.
EK1-10	1P	EK110
EK1-16	12	EK116
EK2-10/16	2P	EK21016
EK3-10/16	3P	EK31016
EK4-10/16	4P	EK41016


Description	Pale	Article No.
EK1-10/16E	1 P	EK11016E
EK2-10E	2P	EK210E
EK2-16E	2 P	EK216E
EK3-10E	3P	EK310E
EK3-16E	3 P	EK316E
EK4-10E	4P.	EK410E
EK4-16E	4P	EK416E

47 70	

Packaging & Shipping

Package:International standard packaging

Transport method: support multiple modes of such as sea, land and air

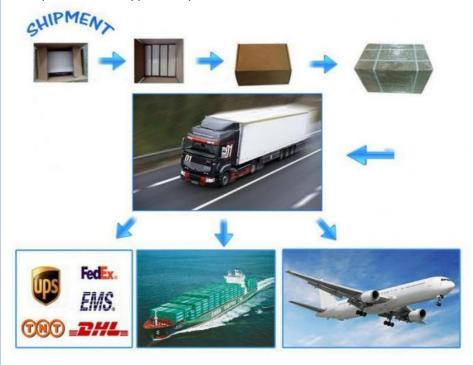

Buyer: If we need some sample, whether you can supply?

Seller: Yes, we can.

Buyer: Our current is 63A, is ok?

Seller: Our max current is 125A. the current is less than 125A, is ok.

Buyer: Can we use our LOGO?

Seller: Yes, we can use your LOGO and company information

Buyer: Fork type copper busbar is U type copper busbar?

Seller: Yes. it's the same. You can choose fork type copper busbar according to your requirements.



008618998498109

eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District, Guangzhou city,Guangdong province,China