


63A Busbar Pin Type 1p N-Le with Fire-Resistant PVC and Long-Lasting Red Copper

Basic Information

- Place of Origin:
- Brand Name: Golden Electric /OEM

China

- Certification:
- Minimum Order Quantity:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:
- ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949 1




- workdays LC, T/T, PayPal, Western Union
 - 5000/Month



Product Specification

- Material Details:
- Character:
- Transport Package:
- Specification:
- Trademark:
- Origin:
- HS Code:
- Supply Ability:
- Certification:
- Model:
- Shape:
- Type:
- Interface Type:
- Application:
- Samples:
- Red Copper And Fire-Resistant PVC **Environmental Protection** Standard Export Carton Pin Fork C45 1p 2p 3p 4p Golden Electric Or Customize China 8543709990 5000/Month CE, TUV, ISO9001, BS, VDE Pin Type, 1p+N-Le Pin Busbar MCB AC/DC PCB, Combiner Box

US\$ 1/Piece 1 Piece(Min.Order) | Request



More Images











Our Product Introduction



Product Description


Terminal Block Connector Pure Copper Busbar is used for kinds of circuit breaker, copper busbar ease wiring electrical item, enlarge area, decrease temperature rise and thus increase the electric reliability of electrical items.

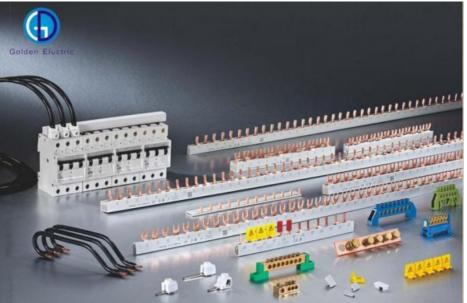

Pin type, 1P+N-LE busbar



	Article No.	А	В	С	D	E	F	G
Description		Cross Section	Distance	Width of Fork	Length of Pin	Modules Length(mm)		Reference
			(mm)	(mm)	(mm)			Current
P-1+N-LE-210/8	KP71208	8mm ²	9	27	4	14.5	12	210
P-1+N-LE-210/10) KP71210	10mm ²	9	27	4	14.5	12	210
P-1+N-LE-210/13	8 KP71213	13mm ²	9	27	4	14.5	12	210
P-1+N-LE-210/16	6 KP71216	16mm ²	9	27	4	14.5	12	210
P-1+N-LE-1000/8	8 KP75408	8mm ²	9	27	4	14.5	54	1000
P-1+N-LE-1000/1	0 KP75410	10mm ²	9	27	4	14.5	54	1000
P-1+N-LE-1000/1	3 KP75413	13mm ²	9	27	4	14.5	54	1000
P-1+N-LE-1000/1	6 KP75416	16mm ²	9	27	4	14.5	54	1000

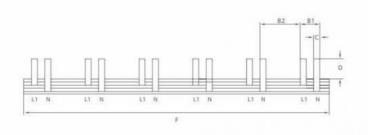


Technical features of copper busbar :

- 1. Material is of fire-resistant PVC and redl copper
- 2. Current rating is up to 100A
- 3. Rated voltage is up to 415V
- 4. Applicable ambient temperature -25~+50
- 5. Standard length 1m, other length tol be made upon request.
- 6. Good conductivity, low contact resistance, safe and reliable.


Other models or customized







Customized busbar

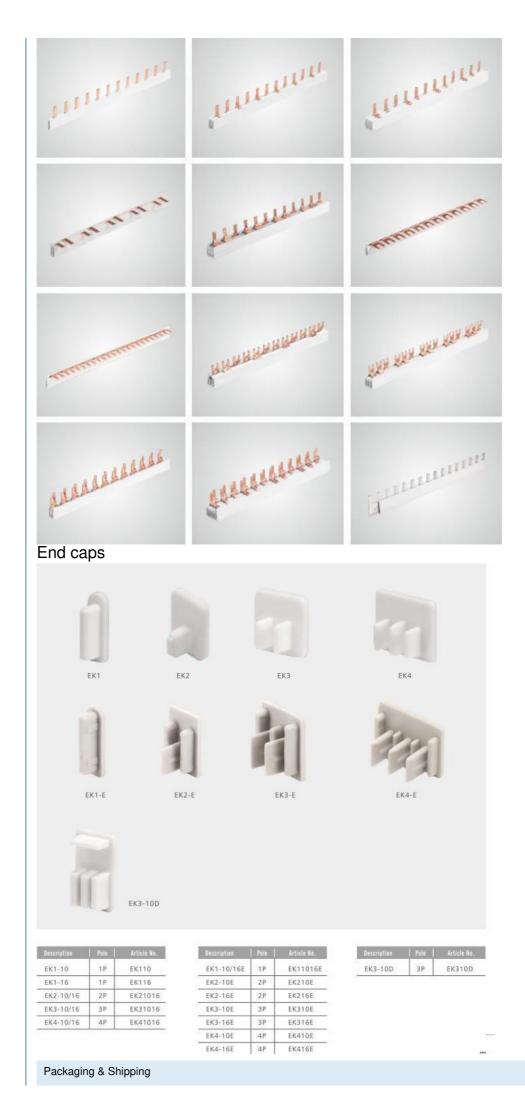



Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District, Guangzhou city,Guangdong province,China