

China

IATF16949

workdays

5000/Month

1

Electric Copper Busbar 3 Phase Bus Bar Pin Type for Sustainable Energy Solutions

ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001,

Peak Season Lead Time: more than 12

LC, T/T, PayPal, Western Union

months Off Season Lead Time: within 15

Basic Information


- Place of Origin:
- Brand Name: Golden Electric /OEM
- Certification:
- Minimum Order Quantity:
- Packaging Details: Carton/Pallet
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification


- Material Details:
- Character:
- Transport Package:
- Specification:
- Trademark:
- Origin:
- HS Code:
- Supply Ability:
- Certification:
- Model:
- Shape:
- Type:
- Interface Type:
- Application:
- Samples:
- Red Copper And Fire-Resistant PVC Environmental Protection Standard Export Carton Pin Fork C45 1p 2p 3p 4p Golden Electric Or Customize China 8543709990 5000/Month CE, TUV, ISO9001, BS, VDE Pin Type, 3 Phase Busbars Pin Busbar MCB AC/DC PCB, Combiner Box

US\$ 1/Piece 1 Piece(Min.Order) | Request



More Images











for more products please visit us on chinagoldene.com

Product Description

Terminal Block Connector Pure Copper Busbar is used for kinds of circuit breaker, copper busbar ease wiring electrical item, enlarge area, decrease temperature rise and thus increase the electric reliability of electrical items.

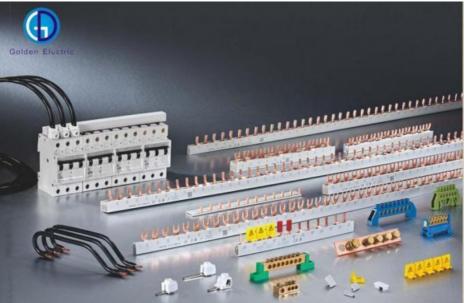


Pin type, 3 phase busbars

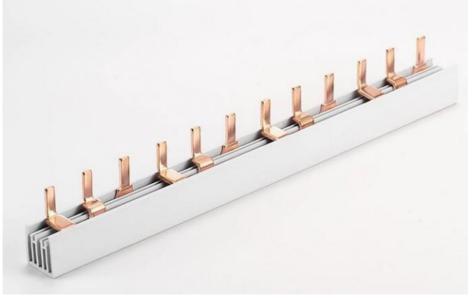

		А	В	С	D	E	F	G
Description	Article No.		Distance Width of Fork Length of Pin					Reference
		Cross Section	(mm)	(mm)	(mm)	Modules Length(mm		n) Current
P-3L-210/8	KP31208	8mm ²	17.8	4	11.5	12	210	50 A
P-3L-210/10	KP31210	10mm ²	17.8	4	11.5	12	210	63 A
P-3L-210/13	KP31213	13mm ²	17.8	4	11.5	12	210	70 A
P-3L-210/16	KP31216	16mm ²	17.8	4	11.5	12	210	80 A
P-3L-1000/8	KP35408	8mm ²	17.8	4	11.5	54	1000	50 A
P-3L-1000/10	KP35410	10mm ²	17.8	4	11.5	54	1000	63 A
P-3L-1000/13	KP35413	13mm ²	17.8	4	11.5	54	1000	70 A
P-3L-1000/16	KP35416	16mm ²	17.8	4	11.5	54	1000	80 A
P-3L-1016/8	KP35708	8mm ²	17.8	4	11.5	57	1016	50 A

P-3L-1016/10 KP35710	10mm ²	17.8	4	11.5	57	1016	63 A
P-3L-1016/13 KP35713	13mm ²	17.8	4	11.5	57	1016	70 A
P-3L-1016/16 KP35716	16mm ²	17.8	4	11.5	57	1016	80 A

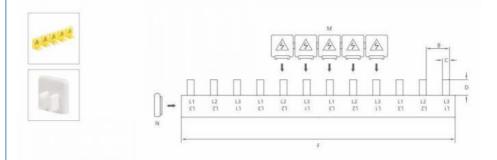

Technical features of copper busbar :

- 1. Material is of fire-resistant PVC and redl copper
- 2. Current rating is up to 100A
- 3. Rated voltage is up to 415V
- 4. Applicable ambient temperature -25~+50
- 5. Standard length 1m, other length tol be made upon request.
- 6. Good conductivity, low contact resistance, safe and reliable.


Other models or customized







Customized busbar

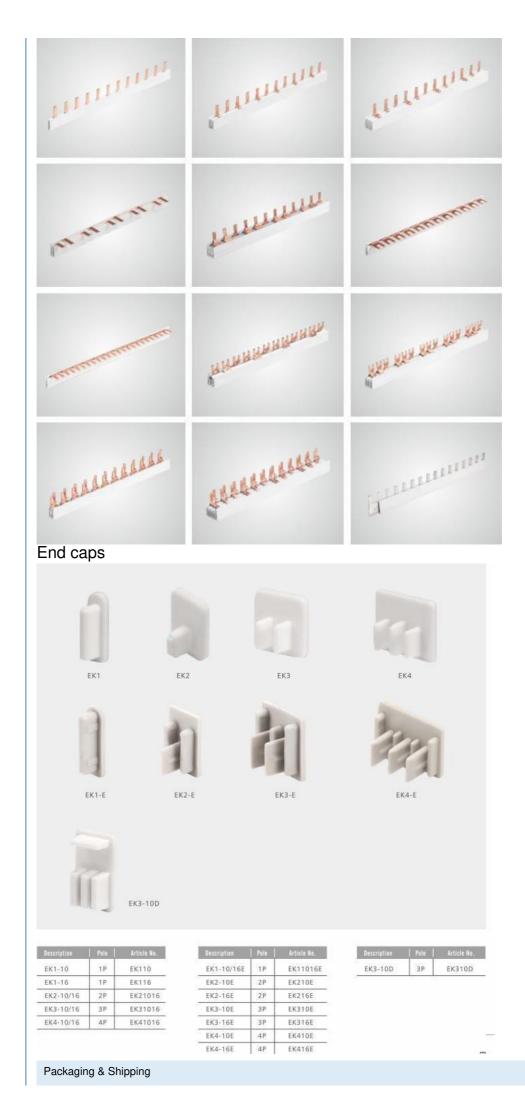



Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District, Guangzhou city,Guangdong province,China