



Steel Structure Post Insulator Bus Bar Insulator with Zn Coating Insertion

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months
Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month




Product Specification

- Size Of Bearing Capacity: 100KN
- Color: Red Or Black
- Brand: Golden Electric/OEM
- Model No.: Mns-6m
- Operating Temperature: -40~+140
- Material Of The Product: Bough Moulding Compound(BMC) SMC
- Tensile Strenth(Lbs): 400
- Torque Strength(Ftlbs): 6
- Product Name: Bus-Bar Insulator
- Color Details: Insert ,Material Accordance With Customer Needs
- Voltage Withstand(Kv): 6
- Screw Depth(mm): 6-10mm
- Warranty: 2years
- Insert: Brass,Steel With Zn Coating



More Images



for more products please visit us on chinagoldene.com



- 工作温度: -40 ~ +140
Operating Temperature: -40 ~ +140
- 嵌件: 黄铜, 铁
Insert: Brass, Steel with Zn coating
- 材料: 不饱和聚酯树脂玻璃纤维增强模压塑料(BMC)(SMC)
Material: BMC (Bough Moulding Compound)
SMC(Sheet Moulding Compound)
- 颜色、嵌件、材料性能可依客户需求定制
Colour, Insert, material In capability accordance with customer needs

■ U4535S 外观及尺寸(mm)	
拉伸强度(LBS)	650
Tensile strength(LBS)	
耐压(KV)	6
Voltage withstand(KV)	
扭矩(FT LBS)	12
Torque strength(FT LBS)	
螺纹(mm)	10 UNC3/8-16
screw(mm)	
螺纹深度(mm)	12
screw depth(mm)	

■ U4535 外观及尺寸(mm)	
拉伸强度(LBS)	700
Tensile strength(LBS)	
耐压(KV)	6
Voltage withstand(KV)	
扭矩(FT LBS)	12
Torque strength(FT LBS)	
螺纹(mm)	10 UNC3/8-16
screw(mm)	
螺纹深度(mm)	12
screw depth(mm)	

■ U4538 外观及尺寸(mm)	
拉伸强度(LBS)	800
Tensile strength(LBS)	
耐压(KV)	8
Voltage withstand(KV)	
扭矩(FT LBS)	12
Torque strength(FT LBS)	
螺纹(mm)	10 UNC3/8-16
screw(mm)	
螺纹深度(mm)	12
screw depth(mm)	

■ U5258 外观及尺寸(mm)	
拉伸强度(LBS)	1000
Tensile strength(LBS)	
耐压(KV)	10
Voltage withstand(KV)	
扭矩(FT LBS)	30
Torque strength(FT LBS)	
螺纹(mm)	10 UNC3/8-16
screw(mm)	
螺纹深度(mm)	15
screw depth(mm)	

■ U6367 外观及尺寸(mm)	
拉伸强度(LBS)	1000
Tensile strength(LBS)	
耐压(KV)	12
Voltage withstand(KV)	
扭矩(FT LBS)	40
Torque strength(FT LBS)	
螺纹(mm)	10 UNC3/8-16
screw(mm)	
螺纹深度(mm)	15
screw depth(mm)	

MNS Insulator Series



型号及含义



产品性能

工作温度：-40℃ ~ +140℃；
螺母：黄铜、铁；
材料：不饱和聚酯树脂玻璃纤维增强压塑料 (BMC)(SMC)；
颜色、配件、材料性能可依客户需求定制。
安装螺丝（附件选配）

MNS-20×20 绝缘端子



耐压 (KV)	8
扭矩 (N/m)	10
螺纹 (mm)	5/6
螺纹深度 (mm)	7

MNS-20×30 绝缘端子



耐压 (KV)	8
扭矩 (N/m)	10
螺纹 (mm)	6/8
螺纹深度 (mm)	10

MNS-30×30



耐压 (KV)	8
扭矩 (N/m)	10
螺纹 (mm)	6/8
螺纹深度 (mm)	10

MNS-40×40(50)



耐压 (KV)	15
扭矩 (N/m)	20
螺纹 (mm)	8/10
螺纹深度 (mm)	11




型号及含义



产品性能


工作温度: $-40^{\circ}\text{C} \sim +140^{\circ}\text{C}$;
螺母: 黄铜、铁;
材料: 不饱和聚酯树脂玻璃纤维增强塑料 (BMC)(SMC);
颜色、嵌件、材料性能可依客户需求定制。
安装螺丝 (附件选配)

MNS-50×50




耐压 (KV)	15
扭矩 (N/m)	20
螺纹 (mm)	8/10
螺纹深度 (mm)	11

MNS-60×60(40)



耐压 (KV)	15
扭矩 (N/m)	20
螺纹 (mm)	10/12
螺纹深度 (mm)	11

U45355 绝缘端子



耐压 (KV)	6	
扭矩 (FTLBS)	12	
螺纹 (mm)	10	UNC 3/8-16
螺纹深度 (mm)	12	

Features:

*Operating temperature: $-40^{\circ}\text{C} \sim +140^{\circ}\text{C}$

*Nut: Brass, Iron

*Material: Unsaturated polyester tree fiberglass reinforced plastic (BMC) (SMC)




*Colors, inserts, material properties can be customized according to customer needs

	TYPE	A/F (mm)	VALUES							
			H (mm)				SCREW (mm)		SCREW DEPTH (mm)	
	MNS16×□□	Φ16	20	25	30	35	40	M6	8	
	MNS25×□□	Φ25	25	30	40	50		M6	9	
	MNS30×□□	Φ30	30	40	50	60		M8	9	
	MNS40×□□	Φ40	40	50	60	70	80	M8	M10	12
	MNS50×□□	Φ50	50	60	70	80		M8	M10	15
	MNS60×□□	Φ60	40	50	60			M10	M12	15
	MNS70×□□	Φ70	70	80	90	100	110	M14	M16	18 22

Instruments and equipment



More Products:

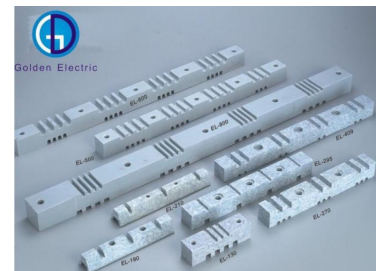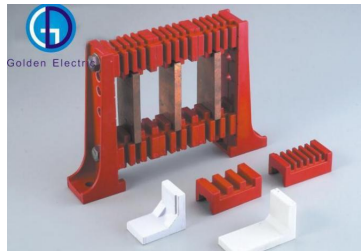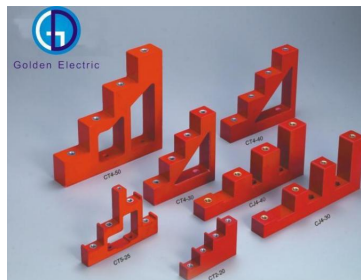

FAQ:

Q: Can I get some samples?

A: Yes, sample order is available for quality check and market test. But you have to pay the express cost.

Q: What's delivery time?

A: It's usually takes about 7 working days for small order and 15 days for big order.

Q: What's your warranty terms?

A: We offer 18 months warranty terms.

Q: Do you have the products in stock?

A: Depends on your request, we have standard models in stock. Some special product and big order will be newly produced according to your order.

Q: Can I mixed different type in one container?

A: Yes, different models can be mixed up in one container, even one order.

Q: How does your factory do the quality control?

A: Quality is priority, we always attach the importance to quality control from the beginning to the end of the production. Every product will be fully assembled and carefully tested before packing and shipping.



Guangzhou Golden Electric Co., Ltd.



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,
Guangzhou city,Guangdong province,China