

# Manual Waterproof Enclosed Isolating Switch Ukf Series Disconnector 3poles 20A 35A 63A

ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001,

Peak Season Lead Time: more than 12

LC, T/T, PayPal, Western Union

months Off Season Lead Time: within 15

## Basic Information

- Place of Origin:
- Brand Name: Golden Electric /OEM

China

IATF16949

workdays

5000/Month

1p/2p/3p/4p

1P/2P/3P/4P

1

- Certification:
- Minimum Order Quantity:
- Packaging Details: Carton/Pallet
- Delivery Time:
- Payment Terms:
- Supply Ability:



## **Product Specification**

- Number Of Poles:
- Grounding:
- Series:
- Run:
- Switching Mode:
- Common Model:
- Structure Of Operating:
- Brand:
- Protection Level:
- Material:
- Contact Material:
- External Size:
- Rated Current:
- Transport Package:
- Specification:
- Single Ground Three Plug-In Single Throw-in Ukf Electric Golden Electric /OEM IP65 ABS&PC Copper Or Sliver 165mm X 82mm X 85mm 20A/35A/63A Standard Export Carton



## More Images









#### Product Description

UKF isolator is rigidly built to withstand more than just the vagaries of the water, it is designed also for frequent switching even on severe load such as switching of motor loads or other highly inductive load. Suitable to be mounted in outdoor and indoor for diverse environment.

The UKF Series of weather protected isolating switch is a robust range of switch suitable for virtually any external application. I ncluded in the range is single, double and triple pole switches from 20 to 63A. The base mounted mechanism provides for easier termination and more wiring room

UKF series of weather-resistant isolator wide range of applications, suitablefor any outdoor application conditions. Including unipolar, bipolar, and three-pole switch, current use of 20A ~ 63A.

Installed base of devices provides a more easy termination and morewiring space. (Switch size is 165mm × 82mm, overall height 85mm.)

Install ground and neutral bars with dual clamping screws to connect thesame cable clamp strip length and reliable. Terminal aperture 5-6mm.

More secure, installation switches to a metal structure with an insulatingcap, insulating cap covering the base mounting screws to prevent their exposure to energized cables.

Each unit supplied with screwed conduit plugs and screwed reducers foreasy connection to 25mm or 20mm conduits and screw caps. Screw caps must be installed to ensure IP Rating.

The impact Resistant base and cover will survive the hardest knocks inalmost any installation. The two sections are sealed with aone piece weather seal gasket.

For security, a 7mm diameter hole is provided for padlocking the lever in theOFF position. Deep moulded barriers protect the operating lever from physical abuse or accidental switching.

All units comply to IEC60947-3.


Standard colours are Grey & White.


#### **Product Parameters**

UKF1-20	20A 500V Single pole surface switch. Terminals accommodate 16mm2 cable. M Rating 220	IP65
UFK1-35	35A/63A 250V Single pole. Terminals accommodate mm2 cable. M rating 220	IP65
UKF1-63	35A/63A 250V Single pole. Terminals accommodate mm2 cable. M rating 220	IP65
UKF2-20	20A 440V double. Trminals accommodate 16mm2 cables. M Rarting 180.	IP65
UFK2-35	35A 440V double. Trminals accommodate 16mm2 cables. M Rarting 180	IP65
UFK2-63	63A 400V double. Trminals accommodate 16mm2 cables. M Rarting 180.	IP65
UFK3-20	63A 400V double. Trminals accommodate 16mm2 cables. M Rarting 180.	IP65
UKF3-35	35A 440V Tripe Pole. Trminals accommodate 16mm2 cables. M Rarting 180.	IP65
UKF3-63	55A 440V Tripe Pole. Trminals accommodate 16mm2 cables. M Rarting 180.	IP65
UKF4-20	20A 440V Tripe Pole. Trminals accommodate 16mm2 cables. M Rarting 180.	IP65
UKF4-35	35A 440V Tripe Pole. Trminals accommodate 16mm2 cables. M Rarting 180.	IP65
UKF4-63	55A 440V Tripe Pole. Trminals accommodate 16mm2 cables. M Rarting 180.	
UKF3-55- 32CE	55A 440V Tripe Pole. With 32mm conduit entry at each end Trminals accommodate 16mm2 cables. M Rarting 160.	IP65
UKF3-63- 32CE	63A 440V Tripe Pole. With 32mm conduit entry at each end Trminalsaccommodate 16mm2 cables. M Rarting 160, Weatherproof Isolating Switches.	IP65
keyword	Weatherproof Isolating Switches.	isola tor

#### **Product Details**

PS rop de uci ctfi Nc at mio en	Pictures	Package Size	PCS/CTN	G.W/CTN
W P ‐ 1 P 2 0 A 1 P 3 5 A 1 P 6 3 A 2 P 2 0 A 2 P 3 5 A 2 P 6 3 A 3 P 2 0 A 3 P 3 5 A 3 P 6 3 A 4 P 2 0 A 4 P 3 5 A 4 P 6 3 A W at er profisionators witch		47.5*35*18.8	20	12kg
		47.5*35*18.8	20	12kg
		47.5*35*18.8	20	12kg
		47.5*35*18.8	20	12kg
		47.5*35*18.8	20	12kg
	Constant and the second	47.5*35*18.8	20	12kg
		47.5*35*18.8	20	12kg
	TY J Annual H	47.5*35*18.8	20	12kg
		47.5*35*18.8	20	12kg
		47.5*35*18.8	20	12kg
		47.5*35*18.8	20	12kg
		47.5*35*18.8	20	12kg

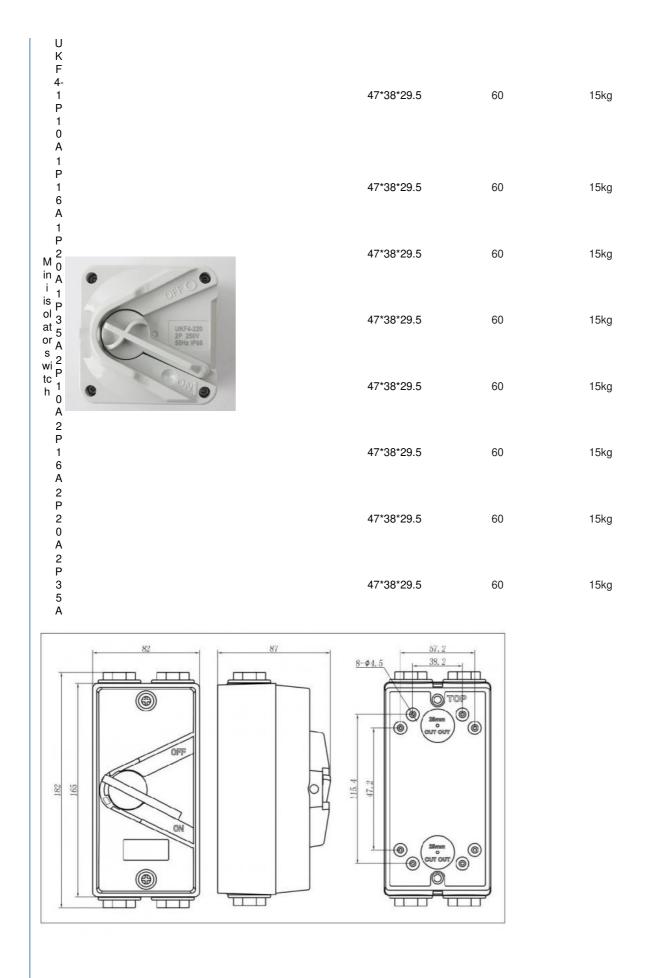

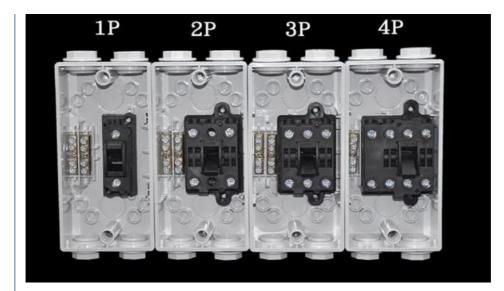


Packing





**Recommand Product** 

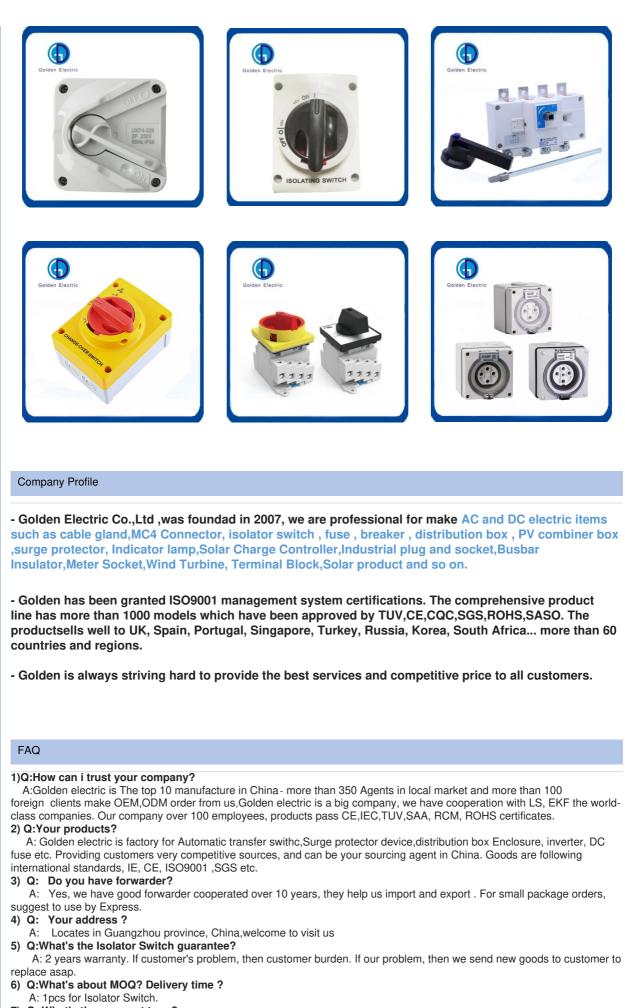

7) Q: What's the payment term?

A: Normally 100% T/T in advanced payment. If big order then about 50% advanced payment, balance before shipment.PAYPAL,WESTERN UNION,CASH for small order .

8) Q:What's your contact information ?

Send us your inquiry !we will reply you in 24 hours !

If you need information about this product. Please Click here to contact me and we will provide you with more information about the products.

