




Insulated Copper Conductor Busbar with 400Lbs Tensile Strength and M6 Screw Isolator

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month

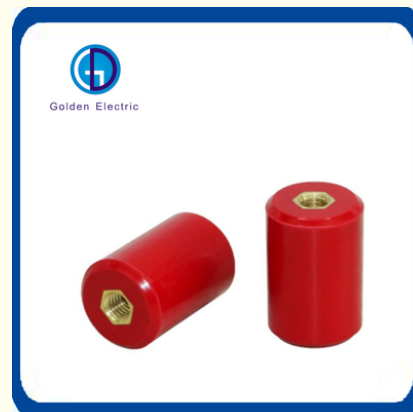


Product Specification

- Size Of Bearing Capacity: 100KN
- Color: Red Or Black
- Brand: Golden Electric/OEM
- Model No.: Mns-6m
- Operating Temperature: -40~+140
- Material Of The Product: Bough Moulding Compound(BMC) SMC
- Tensile Strenth(Lbs): 400
- Torque Strength(Ftlbs): 6
- Product Name: Bus-Bar Insulator
- Color Details: Insert ,Material Accordance With Customer Needs
- Voltage Withstand(Kv): 6
- Screw Depth(mm): 6-10mm
- Warranty: 2years
- Insert: Brass,Steel With Zn Coating



More Images



for more products please visit us on chinagoldene.com

Product Description

MNS20X30 Busbar Insulator M6 Screw Isolator Busbar

Applicable Industries: Building Material Shops, Manufacturing Plant, Machinery Repair Shops, Construction works , Energy & Mining



MNS Insulator Series



型号及含义

MNS-□□□
高度
系列

产品性能

工作温度: $-40^{\circ}\text{C} \sim +140^{\circ}\text{C}$;

螺母: 黄铜、铁;

材料: 不饱和聚酯树脂玻璃纤维增强塑料 (BMC)(SMC);

颜色、配件、材料性能可依客户需求定制。

安装螺丝 (附件选配)

MNS-20×20 绝缘端子



耐压 (KV)	8
扭矩 (N/m)	10
螺纹 (mm)	5/6
螺纹深度 (mm)	7

MNS-20×30 绝缘端子



耐压 (KV)	8
扭矩 (N/m)	10
螺纹 (mm)	6/8
螺纹深度 (mm)	10

MNS-30×30



耐压 (KV)	8
扭矩 (N/m)	10
螺纹 (mm)	6/8
螺纹深度 (mm)	10

MNS-40×40(50)



耐压 (KV)	15
扭矩 (N/m)	20
螺纹 (mm)	8/10
螺纹深度 (mm)	11



型号及含义



产品性能

工作温度: $-40^{\circ}\text{C} \sim +140^{\circ}\text{C}$;
螺母: 黄铜、铁;
材料: 不饱和聚酯树脂玻璃纤维增强塑料 (BMC)(SMC);
颜色、嵌件、材料性能可依客户需求定制。
安装螺丝 (附件选配)

MNS-50×50



耐压 (KV)	15
扭矩 (N/m)	20
螺纹 (mm)	8/10
螺纹深度 (mm)	11

MNS-60×60(40)



耐压 (KV)	15
扭矩 (N/m)	20
螺纹 (mm)	10/12
螺纹深度 (mm)	11

U45355 绝缘端子



耐压 (KV)	6	
扭矩 (FTLBS)	12	
螺纹 (mm)	10	UNC: 3/8-16
螺栓深度 (mm)	12	


Features:

*Operating temperature: $-40^{\circ}\text{C} \sim +140^{\circ}\text{C}$

*Nut: Brass, Iron

*Material: Unsaturated polyester tree fiberglass reinforced plastic (BMC) (SMC)




*Colors, inserts, material properties can be customized according to customer needs

	TYPE	A/F (mm)	VALUES									
			H (mm)					SCREW (mm)		SCREW DEPTH (mm)		
	MNS16×□□	Φ16	20	25	30	35	40	M6		8		
	MNS25×□□	Φ25	25	30	40	50		M6		9		
	MNS30×□□	Φ30	30	40	50	60		M8		9		
	MNS40×□□	Φ40	40	50	60	70	80	M8	M10	12		
	MNS50×□□	Φ50	50	60	70	80		M8	M10	15		
	MNS60×□□	Φ60	40	50	60			M10	M12	15		
	MNS70×□□	Φ70	70	80	90	100	110	M14	M16	18	22	

Instruments and equipment



More Products:

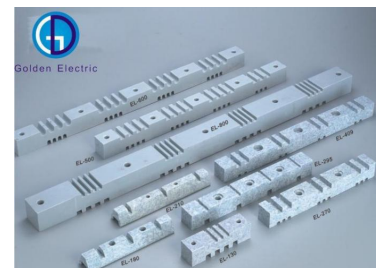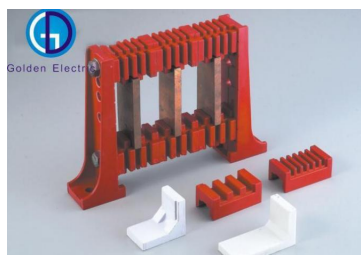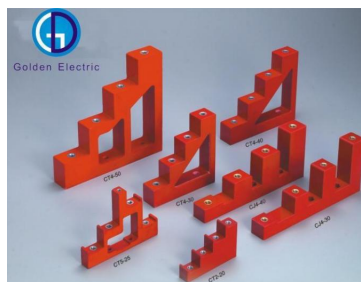

FAQ:

Q: Can I get some samples?

A: Yes, sample order is available for quality check and market test. But you have to pay the express cost.

Q: What's delivery time?

A: It's usually takes about 7 working days for small order and 15 days for big order.

Q: What's your warranty terms?

A: We offer 18 months warranty terms.

Q: Do you have the products in stock?

A: Depends on your request, we have standard models in stock. Some special product and big order will be newly produced according to your order.

Q: Can I mixed different type in one container?

A: Yes,different models can be mixed up in one container,even one order.

Q: How does your factory do the quality control?

A: Quality is priority,we always attach the importance to quality control from the beginning to the end of the production.Every product will be fully assembled and carefully tested before packing and shipping.



Guangzhou Golden Electric Co., Ltd.



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,
Guangzhou city,Guangdong province,China