



IP66 IP68 Explosion-Proof Metal Cable Gland with Nickel Plated Brass Customizable Sizes

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Model Number: M10-M100
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month



Product Specification

- Model NO.: E-15 SERIES
- Clamping Insert: Nylon PA
- Working Temperature: -40~100
- Advantages: Fast Delivery
- Size: M10-M100
- Key Words: Brass Cable Gland
- Function: Cable Protection
- Hot Searching: Atex Cable Gland
- Samples: Provide Sample
- Feature: Seal Part Hold Cable Firmly
- MOQ: 100PCS
- Work Temperature: 40~+100
- Cable Gland: Waterproof
- Thread Length: Standard & Customization
- Other Size: Customization



More Images



for more products please visit us on chinagoldene.com

Product Description

What is the Special of Waterproof Cable Gland?

1.WIRE PROTECTION

Provides strain relief to cables and wires passing through plates or connecting to electrical equipment.

2.EASY INSTALLATION

Simply pass your cable through the gland and tighten the cap.

3.PROFESSIONAL LOOK

Black nylon cable glands are used by professionals everywhere.

4.VERSATILE

Used on all types of electrical, industrial, and automotive equipment and machinery

5.WATERPROOF

IP66 rating allows for underwater use. Resistant to salt water, weak acid, alcohol, oil, grease and common solvents.



Features:

With quick installation, safety, reliability and other characteristics of good protection.

1. It is Made of copper or stainless steel material;
2. Cable is sealed with gasketing;
3. With reliable installation, good protection and explosion-proof function;
4. Isolating gasket tube in suitable for clamping and fixing steel wire knit of armored cable, it is cable core and enclosure gas sealing protection must be IP66

Function: Suitable for clamping and fixing various types of armored cable.



1. Can be used in Hazardous division 1&2;
2. Can be used in Explosive gas atmosphere;



Product parameters:


Double Sealed Explosion-proof Cable Gland JX1 - Metric Thread							
Code	AG Thread		Cable Outer diameter (B)		Max. Length (H)	Thread Length (mm)	Six Angle Size On the edge
	Metric	NPT,G	Min	Max			
JX-1-EX-12	M20*1.5	1/2"	5.5	12	30	15	24
JX-1-EX-16	M20*1.5	1/2"	9.5	16	30	15	24
JX-1-EX-20.5	M20*1.5	1/2"-3/4"	12.5	20.5	35	15	30
JX-1-EX-26	M25*1.5	3/4"-1"	16.9	26	35	15	36
JX-1-EX-33	M32*1.5	1"-1 1/4"	22	33	39	15	46
JX-1-EX-41	M40*1.5	1 1/4"-1 1/2"	28	41	48	15	55
JX-1-EX-52.6	M50*1.5	1 1/2"-2"	36	52.6	53	15	65
JX-1-EX-65.3	M63*1.5	2"-2 1/2"	46	65.3	58	15	80

JX-1-EX-78	M70*2.0	21/2"-3"	57	78	65	15	90
------------	---------	----------	----	----	----	----	----

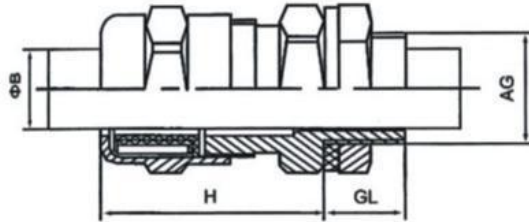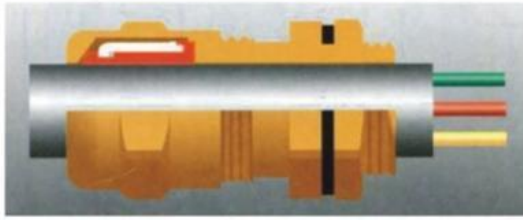

Double Sealed Explosion-proof Cable Gland JX2 - Metric Thread


Code	AG Thread		Inner sheath/ core line			Cable Outer diameter		Armored cable/belt		Max. Length (H)	Thread Length (mm)	Six Angle Size On the edge
	Metric	NPT,G	Core line Max	Inner sheath	Max core line	Min	Max	Direction 1	Direction 2			
JX-2 -EX-12	M2.5	1/2"	9	10	6	5.5	12	0.9/1.25	0/0.7	65.5	15	24
JX-2 -EX-16	M2.5	1/2"	9	10	6	9.5	16	0.9/1.25	0/0.7	65.5	15	24
JX-2 -EX-20.5	M2.5	1/2"-3/4"	11.2	12.5	10	12.5	20.5	0.9/1.25	0/0.7	67.5	15	30
JX-2 -EX-26	M2.5	3/4"-1"	16.3	18.4	21	16.9	26	1.25/1.6	0/0.7	71.4	15	36
JX-2 -EX-33	M3.5	1"-1 1/4"	22	24.7	42	22	33	1.6/2.0	0/0.7	76	15	46
JX-2 -EX-41	M4.5	1 1/4"-1 1/2"	26.5	29.7	60	28	41	1.8/2.5	0/0.7	78.2	15	55
JX-2 -EX-52.6	M5.5	1 1/2"-2"	37.2	41.7	80	36	52.6	1.8/2.5	0/1.0	91	15	65
JX-2 -EX-65.3	M6.5	2"-2 1/2"	47.6	53.5	100	46	65.3	1.8/2.5	0/1.0	98	15	80
JX-2 -EX-78	M7.0	2 1/2"-3"	60	65.3/66.2	120	57	78	1.8/2.5	0/1.0	102	15	95

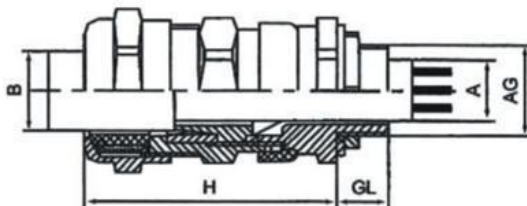

Ex Clamp Sealing Joint JX3- Metric, G Thread


Product Code	Thread AG		Outer Diameter of Cable (mm)		Thread length L1(mm)	Length L (mm)	Length L2 (mm)
			Outlet A	Incoming Line B			
JX-3-EX-15A	M16*1.5	-	8	7-15	15	68	85
JX-3-EX-15B	M20*1.5	G1/2	8	7-15	15	68	85
JX-3-EX-20	M25*1.5	G3/4	13	11-20	15	72	87
JX-3-EX-25	M32*1.5	G1	16	14-25	17	77	92

JX-3-EX-33	M40*1.5 G1 1/4	21	19-33	17	77	95
JX-3-EX-41	M50*1.5 G1 1/2	25	24-41	17	95	100
JX-3-EX-50	M63*1.5 G2	32.5	30-50	17	99	110
JX-3-EX-64	M75*1.5 G2 1/2	44	38-64	17	113	127
JX-3-EX-74A	M85*1.5 G3S	52	47-74	18	113	127
JX-3-EX-74B	M90*1.5 G3	52	47-74	18	127	137
JX-3-EX-90	M100*1.5 G4S	64	57-90	18	127	137
JX-3-EX-103	M110*1.5 G4	72	62-103	18	127	137

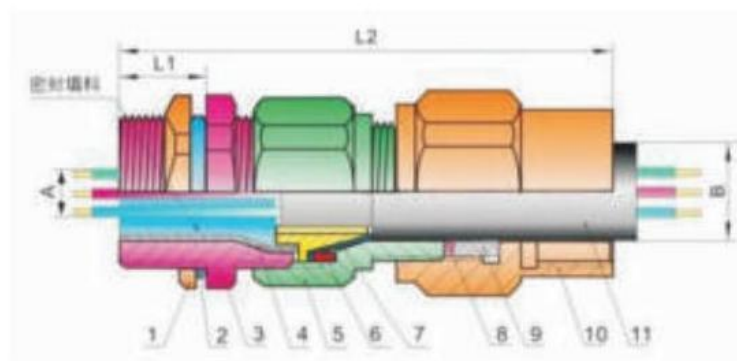


- 1.螺母 2.密封圈 3.入口接体 4.隔爆衬套 5.中接体 6.罩圈
7.锥度套 8.垫片 9.密封圈 10.压紧螺母 11.铠装电缆
1 nut 2 sealing ring 3 inlet connecting body
4 explosion proof bushing 5 middle connecting body
6 cover ring 7 taper sleeve 8 gasket 9 seal ring
10 nut 11 armored cable

Ex Clamp Sealing Joint JX4 - G Thread			
Code	A End Pipe Thread	Cable Range (mm)	Length C (mm)
JX-4-EX-10	G1/2	7-10	63
JX-4-EX-14	G3/4	9-14	64
JX-4-EX-18	G1	12-18	74
JX-4-EX-26	G1 1/4	15-26	84
JX-4-EX-30	G1 1/2	18-30	86
JX-4-EX-42	G2	25-42	86
JX-4-EX-55	G2 1/2	29-55	100
JX-4-EX-65	G3	29-65	100
JX-4-EX-80	G4	41-80	100

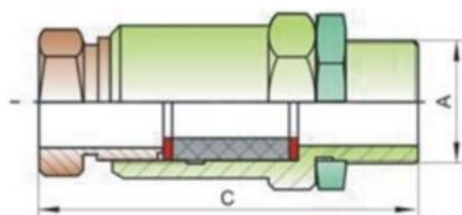

Explosion-proof Cable Gland JX5					
Metric thread(M)	Outer diameter of cable(mm)		SW (mm)	L (mm)	L1 (mm)
	A	B			
JX-5-EX-M16	4-8	5.5-12	24	80	15
JX-5-EX-M20A	6.5-10.5	9.5-16	27	80	15
JX-5-EX-M20B	10-14.5	12.5-20	30	80	15
JX-5-EX-M25	12.5-19.5	16.9-26	36	88	15
JX-5-EX-M32	19-25.5	22-33	45	92	15
JX-5-EX-M40	25-31	28-41	57	98	15
JX-5-EX-M50	31.5-37	36-52.6	65	122	15
JX-5-EX-M63	42.5-55	46-65.3	81	122	15
JX-5-EX-M75	54.5-64	58-78	100	122	18
JX-5-EX-G1/2A	4-8	5.5-12	24	80	15
JX-5-EX-G1/2B	6.5-10.5	9.5-16	27	80	15
JX-5-EX-G3/4	10-14.5	12.5-20	30	80	15
JX-5-EX-G1	12.5-19.5	16.9-26	36	88	15
JX-5-EX-G1 1/4	19-25.5	22-33	45	92	15
JX-5-EX-G1 1/2	25-31	28-41	57	98	15
JX-5-EX-G2	31.5-37	36-52.6	65	122	15


JX-5-EX-G2 1/2	42.5-55	46-65.3	81	122	15
JX-5-EX-G3	54.5-64	58-78	100	122	18
JX-5-EX-NPT1/2A	4-8	5.5-12	24	80	15
JX-5-EX-NPT1/2B	6.5-10.5	9.5-16	27	80	15
JX-5-EX-NPT3/4	10-14.5	12.5-20	30	80	15
JX-5-EX-NPT1	12.5-19.5	16.9-26	36	88	15
JX-5-EX-NPT1 1/4	19-25.5	22-33	45	92	15
JX-5-EX-NPT1 1/2	25-31	28-41	57	98	15
JX-5-EX-NPT2	31.5-37	36-52.6	65	122	15
JX-5-EX-NPT2 1/2	42.5-55	46-65.3	81	122	15
JX-5-EX-NPT3	54.5-64	58-78	100	122	18

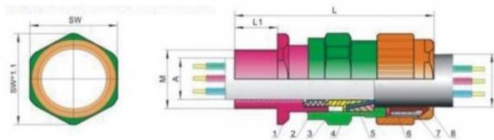

1. Inlet
2. Sealing ring
3. Taper sleeve
4. middle connecting body
5. Covering ring
6. Lock Jaw
7. Sealing ring
8. Compression nut

EX Standard Cable Gland JX6 Series - Metric, G Thread

Product Code	Thread AG		Outer Diameter of Cable (mm)		Thread length L1(mm)	Length L (mm)
			Outlet A	Incoming Line B		
JX-6-EX-15A	M16*1.5	-	5-8	7-15	15	67
JX-6-EX-15B	M20*1.5	G1/2	5-12	8-15	15	67
JX-6-EX-20	M25*1.5	G3/4	8-17	11-20	15	71
JX-6-EX-27	M32*1.5	G1	11-22	14-27	17	76
JX-6-EX-33	M40*1.5	G1 1/4	14-28	19-33	17	76
JX-6-EX-40	M50*1.5	G1 1/2	16-33	22-40	17	94
JX-6-EX-50	M63*1.5	G2	29-43	29-50	17	98
JX-6-EX-63	M75*1.5	G2 1/2	38-57	35-63	17	112
JX-6-EX-77A	M85*1.5	G3S	38-72	41-77	18	114
JX-6-EX-77B	M90*1.5	G3	38-72	41-77	18	126
JX-6-EX-83	M100*1.5	G4S	48-83	55-90	18	126
JX-6-EX-94	M110*1.5	G4	48-94	61-104	18	128

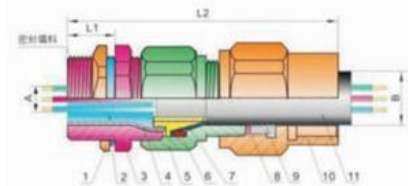

- 1.螺母 2.密封圈 3.入口接体 4.隔爆衬套 5.中接体 6.罩帽
- 7.锥度套 8.垫片 9.密封圈 10.压紧螺母 11.铠装电缆
- 1 nut 2 sealing ring 3 inlet connecting body 4 explosion proof bushing 5 middle connecting body
- 6 cover ring 7 taper sleeve 8 gasket 9 seal ring
- 10 nut 11 armored cable

Customization is acceptable.Welcome to inquire.

Field of Application

Cable glands are mechanical cable entry devices. They are used throughout a number of industries in conjunction with cable and wiring used in electrical instrumentation and automation systems.

Cable gland may be used on all types of electrical power, control, instrumentation, data and telecommunications cables. They are used as a sealing and termination device to ensure that the characteristics of the enclosure which the cable enters can be maintained adequately.

About US

- Golden Electric Co.,Ltd ,was foundad in 2017, we are professional for make AC and DC electric items such as cable gland, isolator switch , fuse , breaker , distribution box , PV combiner box ,surge protector, Industrial plug and socket,Solar product and so on.

- Golden has been granted ISO9001 management system certifications. The comprehensive product line has more than 1000 models which have been approved by TUV,CE,CQC,SGS,ROHS,SASO. The productsells well to UK, Spain, Portugal, Singapore, Turkey, Russia, Korea, South Africa... more than 60 countries and regions.

- Golden is always striving hard to provide the best services and competitive price to all customers.

Packing&Delivery

Packaging Details:

Customized Packing: Header card packing, Blister with card packing, Double blister packing, Canister packing, other packing can be supplied according customers request.

Delivery Detail:

Shipped in 7 days after payment



Related Products



RFQ

Q1. What are your terms of packing?

A: Generally, we pack our goods in neutral white boxes and brown cartons. If you have legally registered a patent, we can pack the goods in your branded boxes after getting your authorization letters.

Q2. What are your terms of payment?

A: T/T 30% as deposit, and 70% before delivery. We'll show you the photos of the products and packages before you pay the balance.

Q3. What are your terms of delivery?

A: EXW, FOB.

Q4. How about your delivery time?

A: Generally, it will take 30 to 60 days after receiving your advance payment. The specific delivery time depends on the items and the quantity of your order.

Q5. Can you produce according to the samples?

A: Yes, we can produce your samples or technical drawings. We can build the molds and fixtures.

Q6. What is your sample policy?

A: We can supply the sample if we have ready parts in stock, but the customers have to pay the sample cost and the courier cost.

Our commitent

BETTER PRICE than other sellers for you because of Factory Direct Sale.

BETTER QUALITY than before caused by our 10+ years trading experience.

STOCK IN TRADE always own to our Fast & Professional production line.

FAST DELIVERY always made by our GROUP's Enthusiam.

TIMING REPLY in 24 hours all about our TEAM's Passion & Patience.

Send your Inquiry Details in the Below, Click "Send" Now~

YOUR BENEFITS IS OUR BUSINESS!!!



Guangzhou Golden Electric Co., Ltd.



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,
Guangzhou city,Guangdong province,China