

Insulated Fork Cable Lugs Nylon/Brass Plug-in Terminal Cable Electrical Connectors

ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001,

Peak Season Lead Time: more than 12

LC, T/T, PayPal, Western Union

months Off Season Lead Time: within 15

Basic Information

- Place of Origin:
- Brand Name: Golden Electric /OEM

China

IATF16949

workdays

5000/Month

1

- Certification:
- Minimum Order Quantity:
- Packaging Details: Carton/Pallet
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

• Model NO .: E-12 SERIES • Shape: Tubular AC/DC • Interface Type: Golden Electric/OEM • Brand: Rated Voltage: 415V Chamfered Entry • Entry: -55c~150c • Busbar: 1.5~600mm2 Size: Coating: Tin • OEM: Accept • Sample: Accept • Wire Range: 22~16/16~14/14~12/12~10 A.W.G Natural Color: Insulated Terminal Blocks • Product Key Words:

27A



More Images

• Imax:



Product Description

Product Description



Product Details:

1. The SC series copper cable lugs are suitable for the connection of copper conductors(section 1.5-1000mm2)in power cable with electronic equiqment.

2. the cable lugs are made of with higher 99.9 percent pute copper tube T2 and coated with tin.


3. Working temperature-55°C-150°C.

Product Parameters

Insulated Female Disconnector



Terminal Material:Brass Plating:electro Tin Plated Insulation Material:vinyl(pvc) 端子材料:黄铜 电镀:铜锡 绝缘材料: PVC




	WIRE RANGE		寸(mm)	SIONSR	DIMEN		Thickness of material	NAME TAB(mm)	ITEM NO
颜色	AWG/mm ²	В	L	С	D	W	inickness of material	NAME IAB(IIIII)	型 号
		10.0	19.0	1.7	3.8	3.8	0.3	0.5×2.8	FDD 1.25-110(5)
		10.0	19.0	1.7	3.8	3.8	0.3	0.8×2.8	FDD 1.25-110(8)
Red红	22~16AWG	10.0	19.0	1.7	3.8	5.6	0.35	0.5×4.75	FDD 1.25-187(5)
•	0.5~1.5/mm ² 10A	10.0	19.0	1.7	3.8	5.6	0.35	0.8×4.75	FDD 1.25-187(8)
	IUA	10.0	20.0	1.7	3.8	6.5	0.35	0.5×5.2	FDD 1.25-205
		10.0	21.0	1.7	3.8	7.4	0.4	0.8×6.35	FDD 1.25-250
1	1	10.0	19.0	2.3	4.3	3.8	0.3	0.5×2.8	FDD 2-110(5)
		10.0	19.0	2.3	4.3	3.8	0.3	0.8×2.8	FDD 2-110(8)
		10.0	19.0	2.3	4.3	5.6	0.35	0.5×4.75	FDD 2-187(5)
Blue 蓝	16~14AWG 1.5~2.5/mm	10.0	19.0	2.3	4.3	5.6	0.35	0.8×4.75	FDD 2-187(8)
	15A	10.0	20.0	2.3	4.3	6.5	0.35	0.5×5.2	FDD 2-205
		10.0	21.0	2.3	4.3	7.4	0.4	0.8×6.35	FDD 2-250
		10.0	23.0	2.3	4.3	9.0	0.4	0.8×8.0	FDD 2-312
		14.0	23.0	3.4	5.7	5.6	0.4	0.5×4.75	FDD 5.5-187
Yellow 1	12-10AWG	13.0	25.0	3.4	5.7	7.4	0.4	0.8×6.35	FDD 5.5-250
	4~6/mm' 24A	14.0	27.0	3.4	5.7	9.0	0.5	0.8×8.0	FDD 5.5-312
	-46	13.0	29.6	3.4	5.7	10.9	0.5	1.2×9.4	FDD 5.5-375

Insulated Male Disconnector



Terminal Material:Brass Plating:electro Tin Plated Insulation Material:vinyl(pvc) 端子材料: 黄铜 电镀 銅器 绝缘材料: PVC



Color	WIRE RANGE		(mm)	nsion尺寸	Dimer		Thickness of material	NAME TAB(mm)	ITEM NO
颜色	AWG/mm ²	в	L	С	D	W	I nickness of material	NAME IAD(mm)	型 号
		10.0	17.7	4.3	1.7	2.8	0.5	0.5×2.8	MDD 1.25-110(5)
		10.0	17.7	4.3	1.7	2.8	0.8	0.8×2.8	MDD 1.25-110(8)
Red 红	22~16AWG	10.0	20.0	4.3	1.7	4.75	0.5	0.5×4.75	MDD 1.25-187(5)
ım" 🔸	0.5~1.5/mm'	10.0	20.0	4.3	1.7	4.75	0.8	0.8×4.75	MDD 1.25-187(8)
	10A	10.0	21.0	4.3	1.7	6.35	0.4×2	0.8×6.35	MDD 1.25-250
		10.0	17.7	4.3	2.3	2.8	0.5	0.5×2.8	MDD 2-110(5)
	1.002-00000000	10.0	17.7	4.3	2.3	2.8	0.8	0.8×2.8	MDD 2-110(8)
Blue i	16~14AWG 1.5~2.5/mm ²	10.0	20.0	4.3	2.3	4.75	0.5	0.5×4.75	MDD 2-187(5)
-	1.5~2.5/mm 15A	10.0	20.0	4.3	2.3	4.75	0.8	0.8×4.75	MDD 2-187(8)
	1071.10	10.0	21.0	4.3	2.3	6.35	0.4×2	0.8×6.35	MDD 2-250
Yellow	12~10AWG	13.0	23.0	5.7	3.4	4.75	0.5	0.5×4.75	MDD 5.5-187
	4~6/mm ² 24A	13.0	25.0	5.7	3.4	50 0.8×6.35 0.4×2 6.35	MDD 5.5-250		

Full Insulated Female Disconnector



Terminal Material:Brass Plating:electro Tin Plated Insulation Material:vinyl(pvc) 端子材料:黄铜 电镀:铜锡 绝缘材料: PVC


-		- L -		1
+	в →	1		
ŧ	-	5	~	1
음峰		R.	0	Ų,

	WIRE RANGE		(mm)	nsion尺寸	Dimer		Thickness of material	NAME TAB(mm)	ITEM NO
颜色	AWG/mm ²	в	L	С	D	W	I nickness of material	NAME (AD(mm)	코 号
		10.0	17.7	4.3	1.7	2.8	0.5	0.5×2.8	MDD 1.25-110(5)
		10.0	17.7	4.3	1.7	2.8	0.8	0.8×2.8	MDD 1.25-110(8)
Red 红	22~16AWG	10.0	20.0	4.3	1.7	4.75	0.5	0.5×4.75	MDD 1.25-187(5)
•	0.5~1.5/mm'	10.0	20.0	4.3	1.7	4.75	0.8	0.8×4.75	MDD 1.25-187(8)
	10A	10.0	21.0	4.3	1.7	6.35	0.4×2	0.8×6.35	MDD 1.25-250
		10.0	17.7	4.3	2.3	2.8	0.5	0.5×2.8	MDD 2-110(5)
	1.002-00000000	10.0	17.7	4.3	2.3	2.8	0.8	0.8×2.8	MDD 2-110(8)
Blue 蓝	16~14AWG 1.5~2.5/mm ²	10.0	20.0	4.3	2.3	4.75	0.5	0.5×4.75	MDD 2-187(5)
-	15A	10.0	20.0	4.3	2.3	4.75	0.8	0.8×4.75	MDD 2-187(8)
		10.0	21.0	4.3	2.3	6.35	0.4×2	0.8×6.35	MDD 2-250
Yellow #	12~10AWG	13.0	23.0	5.7	3.4	4.75	0.5	0.5×4.75	MDD 5.5-187
	4~6/mm ² 24A	13.0	25.0	5.7	3.4	6.35	0.4×2	0.8×6.35	MDD 5.5-250

Insulated Bullet Disconnector



Terminal Material:Brass Plating:electro Tin Plated Insulation Material:vinyl(pvc) 端子材料:黄铜 电镀: 铜锡 绝缘材料: PVC



ITEM NO	Nema Tab		Dimensio	n尺寸(mm)		WIRE RANGE	Color
型号	(mm)	В	DΦ	dΦ	L	AWG/mm ²	颜色
FDFD 1.25-187(5)	0.5×4.75	5.6	3.8	1.7	20.0		
FDFD 1.25-187(8)	0.8×4.75	5.6	3.8	1.7	20.0	22~16AWG 0.5~1.5/mm ²	Red 红
FDFD 1.25-250	0.8×6.35	7.4	3.8	1.7	21.5	10A	
FDFD 2-187(5)	0.5×4.75	5.6	4.3	2.3	20.0		
FDFD 2-187(8)	0.8×4.75	5.6	4.3	2.3	20.0	16~14AWG 1.5~2.5/mm ²	Blue 菌
FDFD 2-250	0.8×6.35	7.4	4.3	2.3	21.5	15A	
FDFD 5.5-250	0.8×6.35	7.4	5.7	3.4	25.5	12~10AWG 4~6/mm ² 24A	Yellow 1

Full Insulated Receptacle Disconnector



Terminal Material:Brass Plating:electro Tin Plated Insulation Material:vinyl(pvc)

端子材料: 黄铜 电镀: 铜锡 绝缘材料: PVC


	+ F +	- в
i		~
V		
-		F-6

ITEM NO	Thickness of material		Dimension尺寸(mm) WIRE RANGE					WIRE RANGE	Color 颜色
型号	I nickness of material	W	F	С	В	L	D	AWG/mm ²	颜色
FRD 1.25-156	0.4	4.0	6.3	1.7	13.0	24.5	2.7	22~16AWG 0.5~1.5/mm ² 10A	Red 11
FRD 2-156	0.4	4.0	6.3	2.3	14.0	24.5	3.3	16~14AWG	Blue 蓝
FRD 2-195	0.4	5.0	7.0	2.3	14.0	25.5	3.3	1.5~2.5/mm' 15A	•
FRD 5.5-195	0.4	5.0	7.0	3.4	14.0	29.5	4.5	12~10AWG 4~6/mm2 24A	Yellow

Insulated Piggy Back Disconnector



Terminal Material:Brass Plating:electro Tin Plated Insulation Material:vinyl(pvc) 端子材料: 黄铜 电镀 铜錫 绝缘材料: PVC




ITEM NO	NAMA TAB			Dimension	n尺寸(mm)			WIRE	Color 颜色
型号	NAMA IAD	В	B1	н	Dø	dφ	L	AWG/mm ²	颜色
PBDD 1.25-250	0.8×6.35	7.4	6.35	10.0	3.8	1.7	21.5	22~16AWG 0.5-1.5/mm ⁴ 10A	Red 红
PBDD 2-250	0.8×6.35	7.4	6.35	10.0	4.3	2.3	21.5	16~14AWG 1.5~2.5/mm ¹ 15A	Blue 蓝
PBDD 5.5-250	0.8×6.35	7.4	6.35	13.0	5.7	3.4	25.0	12~10AWG 4~6/mm2 24A	Yellow #

Nylon Insulated Flag Female Disconnector



Terminal Material:Brass Plating:electro Tin Plated Insulation Material:vinyl(pvc) 端子材料:黄铜 电镀:铜锡 绝缘材料: PVC




ITEM NO	Nema Tab		Dimensio	n尺寸(mm)		WIRE	Color
型号	(mm)	W	F	L	dΦ	AWG/mm ²	Color 顏色
FLDNY 1.25-250	0.8×6.35	6.6	7.6	16.0	1.7	22~16AWG 0.5~1.5/mm ³ 10A	Red 打
FLDNY 2-250	0.8×6.35	6.6	7.6	16.0	2.3	16~14AWG 1.5~2.5/mm² 15A	Blue 蓋
FLDNY 5.5-250	0.8×6.35	6.6	7.6	16.0	3.4	12-10AWG 4-6/mm2 24A	Yellow 3

Quick Splice Connector



Terminal Material:Copper Plating:electro Tin Plated Insulation Material: Nylon 端子材料: 紫铜 电镀:铜锡 绝缘材料: 尼龙




ITEM NO	Dimension	n尺寸(mm)	Cable size	能都面(mm ²)	Color颜色
型 号	W	L	Gable Sizeri	SZ WZ BELTITITI /	COIDTIME
878100	20.0	27.0	22-18A.W.G	0.5-1.0mm2	● Red 红色
878101	20.0	27.0	18-14A.W.G	0.75-2.5mm2	● Bule 蓝色
878101	20.0	27.0	18-14A.W.G	0.72-2.5mm2	〇 White 白色
878201	20.5	34.5	12-10A.W.G	4-6mm2	● Yellow 黄色

Quick Splice Connector




Terminal Material:Copper Plating:electro Tin Plated Insulation Material: Nylon 端子材料: 紫铜 电镀: 铜锡 绝缘材料: 尼龙



ITEM NO	DIMENSION	I尺寸(mm)	WIRE RANGE	Color
型 号	W	L	AWG/mm ²	00101
T1	9.8	37.0	22-18AWG 0.5~0.75mm ^e	Red
T2	9.8	37.0	18-14AWG 0.75-2.5mm*	Blue
тз	9.8	37.0	12AWG 4mm'	Yellow

Packaging & Shipping

Terminal Value Of Packaging

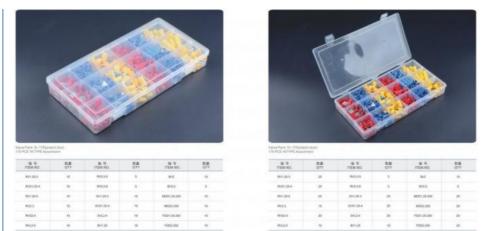

Packaging Details:

Customized Packing: Header card packing, Blister with card packing, Double blister packing, Canister packing, other

packing can be supplied according customers request.

Shipping:

- 1. By Air or by Sea for batch goods, Airport/ Port receiving;
- 2. Customers specifying freight forwarders or negotiable shipping methods!

Delivery Detail:

Shipped in 7 days after payment

Company Profile

- Golden Electric Co.,Ltd ,was foundad in 2017, we are professional for makeAC and DC electric items such as cable gland,cable tie ,isolator switch , fuse , breaker , distribution box , PV combiner box ,surge protector, Industrial plug and socket,Solar product and so on.

- Golden has been granted ISO9001 management system certifications. The comprehensive product line has more than 1000 models which have been approved by TUV,CE,CQC,SGS,ROHS,SASO. The productsells well to UK, Spain, Portugal, Singapore, Turkey, Russia, Korea, South Africa... more than 60 countries and regions.

- Golden is always striving hard to provide the best services and competitive price to all customers. **Recommend Products**



Closed end Terminal



Nylon Connectors





Tube Type Terminal



Plug-in Terminal

Copper Bare Terminal

Insulated Copper Terminals

Our Advantages

- 1.Best ensure 100% customer satisfaction.
- 2.Our products have one year guarantee.
- 3.Sample in design and easy to operate and maintain.
- 4.All electrical parts of products are made up for qualitified marterials.
- 5.No MOQ limited for the trial order.
- 6.We adopt good credit quality electrial appliances.
- 7.Best customer care and effcient after-sale services.
- 8.Don't hesitate to inquire us, we will reply you within 12 hours.

FAQ

Q1: Could I Put My Own Logo On It? A1: Sure, of course, we are a professional manufacturer and have over 10 years OEM experience, customer;s logo can be made by laser, engraved, embossed, transfer printing etc. Q2: What's the delivery time? A2: Normally, 3-15days after order and payment confirmation. Actually, it will depend on your orderquality. Q3: What's your terms of payment? A3: T/T 30% as deposit, and 70% before delivery. We'll show you the photos of the products and packages before you pay the balance. Q4: How do you make our business long-term and good relationship? A4: a. We keep good quality and competitice price to ensure our customers benefit; b. We respect every customer as our friend and we sincerely do business and make friends with them, no matter where they come from. Q5: If we bought your products, but found quality problem, how to solve? A5: After confirmed, if the quality problem is caused by us not for outer sector, we will compensate each piece to customer. How to contact us Send your Inquiry Details in the Below, please Click "send" Now! Good price and sample are waiting for you. Guangzhou Golden Electric Co., Ltd. 008618998498109 eva@china-golden.com.cn Chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District, Guangzhou city,Guangdong province,China