



Low Voltage Tall Tower Copper/Stainless Steel Lightning Arrester for Lightning System

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months
Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month



Product Specification

- Size: Small
- Brand: Golden Electric /OEM
- Transport Package: Standard Export Carton
- Trademark: Golden Or Natural, Or Customer Brand
- Origin: China
- HS Code: 7326909000
- Supply Ability: 50000PCS/Month
- Usage: Working Earthing, Earthing System, Lightning Protection Earthing, Protection Earthing
- Working Voltage: Low Voltage
- Application: Tall Tower
- Earthing Method: Direct Earthing Method
- Material: Copper. Aluminum. Galvanized.Stainless
- Certification: CCC, ISO9001, ROHS
- Customization: Available / Customized Request



More Images



for more products please visit us on chinagoldene.com

Product Description

Product Description

As Lightning Arrester Manufacturer In China, Lightning Arrester is used for protecting the buildings to avoid lightning strike. Lightning Rod plays an important part of the air termination network of a lightning protection system. We are professional lightning rod manufacturer.

Lightning arrester, alternate named lightning protection devices, used for protecting the building when raining and lightning. The lightning rod installed on the building and transfer the electric to earthing metal to protect the building. Our SLE lightning rod comply with GB standard. Customized lightning rod available.

Application

Lightning arrester is used for lightning system of power plant, transformer station, tower, communication station, airport, railway, subway station, high building, computer room, petro plant, oil reservoir in the environmental of moist, saline and alkaline, acid and chemical corrosion medium environmental.

Product Parameters

Material	Copper or Brass or Copper Clad Steel or Stainless Steel		
Size	according to customer's requirement		
Life	More than 50 Years		
Characters	Easy installation, long life		
Description	Size	Material	
Lightning rod	Dia7mmxL250mm	copper clad steel or stainless steel	
Three point needle	Dia7mmxL9mm		
Ball	Dia18mm		
Holder	Dia85mmxH60mm		
Base	100mmx100mmx2mm		
Total Height	370mm		
Rod Length	Rod diameter	Thread	Material
500mm	15mm	M16	Brass, copper
1000mm	15mm	M16	Brass, copper
1500mm	15mm	M16	Brass, copper
Avaliable Dia:8mm-25mm; Length:300mm-2000mm			
Base	Conductor size	Rod diameter	Material
1	50-95mm ² wire	15mm	Brass
2	25mmx3mm copper tape	15mm	Brass
Three Point Needle	Nos	Rod	Material
1	3	15mm	Brass, copper

Installation Instructions

(A) The installation of lightning rod

Matters need attention during installation:

- (1) The lightning rod and other metal part on the building should be connected together;
- (2) No low voltage cable or communication cable installed on the rod

(B) Installation of earthing tape and earthing grid

1. Installation of exposed earthing tape (grid) :Installed at the ridge ,eave(abat-vent) or edge of roof

(1) Installation at the concrete base of roof :The base can be made with the roof together ,and fixed to the roof.

(2) Installation on the parapet wall or gutter bracket

Installed along parapet wall and fixed with bracket ,and the bracket should be installed earlier .The working height of bracket should be less than 150mm . The bracket for direct line should be first and then for the middle .The bracket should be 0.25-0.5m away to the turning point if turning needed . The horizontal spacing of bracket is 1-1.5m ,and vertical interval is 1.5-2m and even distribution

(3) Installation at ridge ,eave or edge of roof


Use concrete base or bracke

If make the base on site , please remove the corner of ridge tile first ,and make the bracket and ridge tile together;


The bracket should be 0.25-0.5m away to the turning point if turning needed . The horizontal spacing of bracket is 1-1.5m ,and vertical interval is 1.5-2m and even distribution

Detailed Photos

Application Scenarios

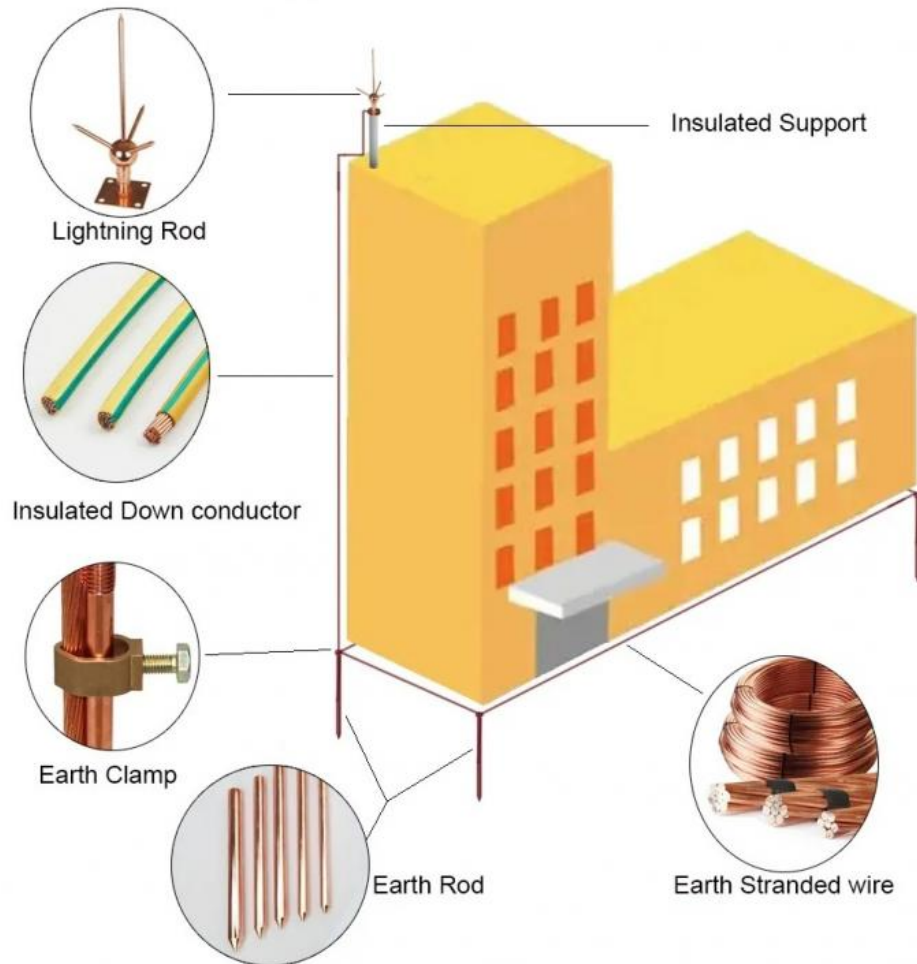


Earthing System

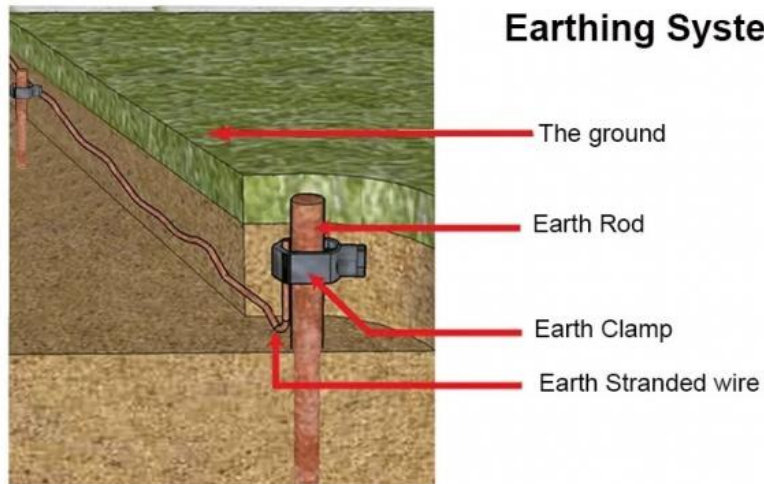



Recommend Product



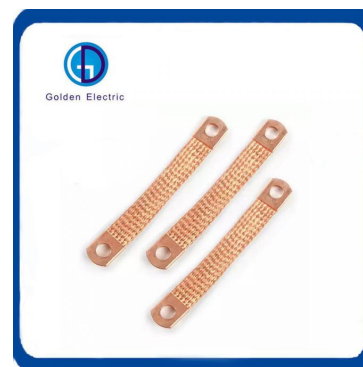

Company Profile

- Golden Electric Co.,Ltd ,was founded in 2007, we are professional for make AC and DC electric items such as cable gland,Solar PV Cable, MC4 Connector, isolator switch , fuse , breaker , distribution box , PV combiner box ,surge protector, Indicator lamp,Solar Charge Controller,Industrial plug and socket,Wind Turbine, Solar product ,Copper Earthing Rods, Copper Busbar and so on.

- Golden has been granted ISO9001 management system certifications. The comprehensive product line has more than 1000 models which have been approved by TUV,CE,CQC,SGS,ROHS,SASO. The productsells well to UK, Spain, Portugal, Singapore, Turkey, Russia, Korea, South Africa... more than 60 countries and regions.

- Golden is always striving hard to provide the best services and competitive price to all customers.

FAQ

1) Q:How can i trust your company?

A:Golden electric is The top 10 manufacture in China - more than 350 Agents in local market and more than 100 foreign clients make OEM,ODM order from us,Golden electric is a big company, we have cooperation with LS, EKF the world-class companies. Our company over 100 employees, products pass CE,IEC,TUV,SAA, RCM, ROHS certificates.

2) Q:Your products?

A: Golden electric is factory for Automatic transfer swithc,Surge protector device,distribution box Enclosure, inverter, DC fuse Copper Earthing Rod etc. Providing customers very competitive sources, and can be your sourcing agent in China. Goods are following international standards, IE, CE, ISO9001 ,SGS etc.

3) Q: Do you have forwarder?

A: Yes, we have good forwarder cooperated over 10 years, they help us import and export . For small package orders, suggest to use by Express.

4) Q: Your address ?

A: Locates in Guangzhou province, China,welcome to visit us

5) Q:What's the Copper / Stainless Steel Lightning Arrester guarantee?

A: 2 years warranty. If customer's problem, then customer burden. If our problem, then we send new goods to customer to replace asap.

6) Q:What's about MOQ? Delivery time ?

A: 1pcs for Copper / Stainless Steel Lightning Arrester .

7) Q: What's the payment term?

A: Normally 100% T/T in advanced payment. If big order then about 50% advanced payment, balance before shipment. PAYPAL, WESTERN UNION, CASH for small order .

8) Q: What's your contact information ?

Send us your **inquiry** ! we will reply you in 24 hours !

If you need information about this product. Please **Click here** to contact me and we will provide you with more information about the products.



Guangzhou Golden Electric Co., Ltd.



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,
Guangzhou city, Guangdong province, China