



Ball Type Copper Plated Lightning Rod of Thunder for Different Sizes and Specifications

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month




Product Specification

- Material: Brass Or Pure Copper Or Stainless Steel, Brass Or Pure Copper Or Stainless Steel
- OEM: Yes
- Categories: Lightning Rod
- Manufacturer: Yes
- Supplier By Country: China
- Transport Package: Oceanfreight Cartons+Wooden Cases+Pallet+Container
- Specification: Different Sizes And Specifications
- Trademark: Golden Electric Or Customize
- Origin: China
- HS Code: 8535400000
- Supply Ability: 5000/Month
- Type: Ball Type, Round
- Structure: Tube Type Arrester
- Installation: Parallel Arrester



More Images



for more products please visit us on chinagoldene.com

Product Description

Company

Profile
GoldenElectricCo., Ltd.

is professional make of Electrical products .Such as distribution box, waterproof plug, socket, wall switch, waterproof plastic ,Aluminum box ,Changeover Switch and disconnecting switch,MC4 Connector.isolator switch.fusebreaker.distribution box,PV combiner box .surge protector, Indicatorlamp,Solar Charge Controller,Industrialplugandsocket,BusbarInsulator,Meter Socket,Wind Turbine, Terminal Block,Solar product and so on. all products comply with IEC, A S/NZS standard. passed CE, IP66, ROHS certificates.at present we have exported to many countries and have serve these customers with professional electrical solution.

Product Description

Copper Plated Lightning Rod Of Thunder

Material	Copper or Brass or Copper Clad Steel or Stainless Steel
Service life	More than 50 Years
Characters	Characters
Available service mode	OEM,ODM
Certificate	ISO9001:2015

Negotiable Price According to different material/size and and Purchase quantity

Description	Common Size(We accept customization)		
Ball	Dia58mm		
Base	100mmx100mmx3mm		
Total Height	380mm		
Rod Length	Rod diameter	Thread	Material
500mm	16mm	M16	Brass,copper
1000mm	16mm	M16	Brass,copper
1500mm	16mm	M16	Brass,copperl
Avaible Dia:8mm-25mm; Length:300mm-2000mm			
Base	Conductor size	Rod diamter	Material
1	50-95mm ² wire	16mm	Brass
2	25mmx3mm copper tape	16mm	Brass
Three Point Needle	Nos	Rod	Material
1	3	16mm	Brass,copper




Golden Electric




Golden Electric



Application Scenarios

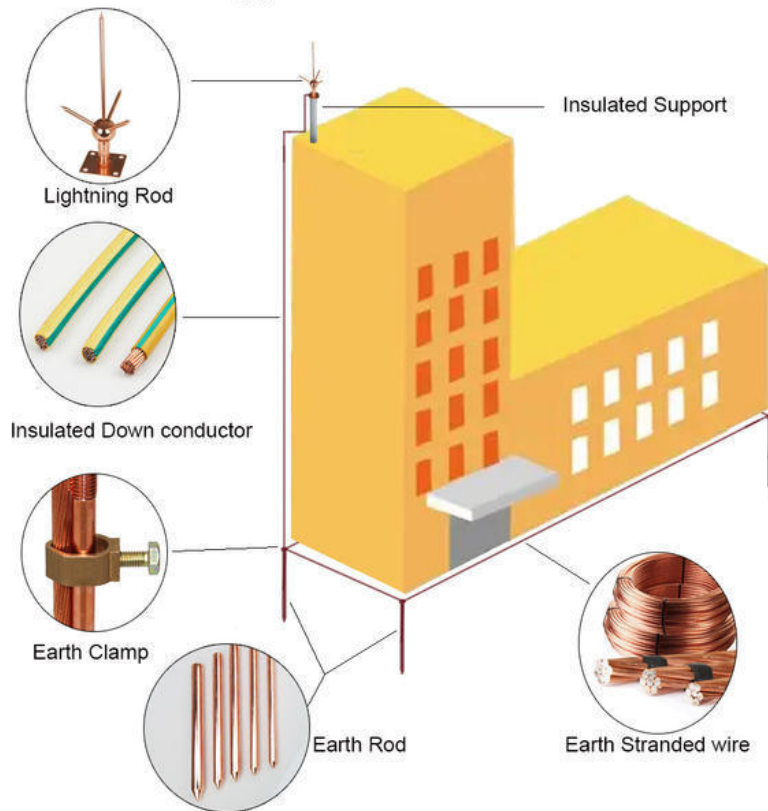

Earthing System

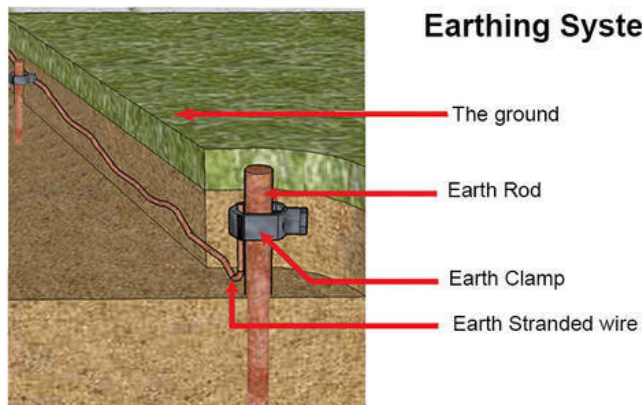



Golden Electric



Golden Electric





Golden Electric



Golden Electric





Golden Electric



Golden Electric





Lightning arrester is used for lightning system of power plant ,transformer station ,tower ,communication station ,airport,railway, subway station , high building ,computer room ,petro plant ,oil reservoir in the environmental of moist ,saline and alkaline ,acid and chemical corrosion medium environmental.

Installation

(A)The installation of lightning rod

Matters need attention during installation:

(1)The lightning rod and other metal part on the building should connected together;

(2)No low voltage cable or communication cable installed on the rod

(B)Installation of earthing tape and earthing grid

1. Installation of exposed earthing tape (grid) :Installed at the ridge ,eave(abat-vent) or edge of roof

(1)Installation at the concrete base of roof :The base can be made with the roof together ,and fixed to the roof.

(2) Installation on the parapet wall or gutter bracket

Installed along parapet wall and fixed with bracket ,and the bracket should be installed earlier .The working height of bracket

should be less than 150mm . The bracket for direct line should be first and then for the middle .The bracket should be 0.25-0.5m

away to the turning point if turning needed . The horizontal spacing of bracket is 1-1.5m ,and vertical interval is 1.5-2m and

even distribution

(3) Installation at ridge ,eave or edge of roof


Use concrete base or bracke

If make the base on site , please remove the corner of ridge tile first ,and make the bracket and ridge tile together;

The bracket should be 0.25-0.5m away to the turning point if turning needed . The horizontal spacing of bracket is 1-1.5m ,and

vertical interval is 1.5-2m and even distribution.

Products Category

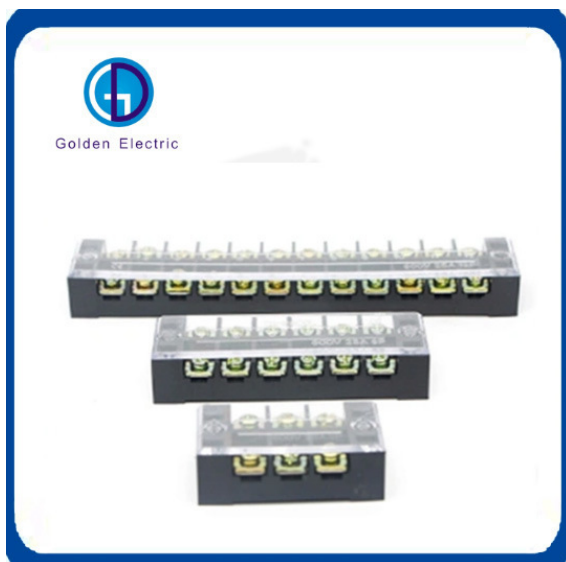

Electrical Fixed Terminal Strips Wire Connectors Transformer



Low Voltage Indoor Current Transformer



Junction Box with Waterproof IP66 Connector



IP44 Industrial Plug Socket

Packing & Delivery

Packaging Details: Lightning Rod Price packing: cartons+wooden cases+pallet+container

Lead time:

Quantity(pieces) 1 - 1000 1001 - 100000 >100000

Lead time (days) 15 35 To be negotiated





FAQ

Q1: Are you a factory or trading company

A1: We are a factory, we can guarantee our price is first-hand, very cheap and competitive.

Q2: How does your factory do regarding quality control?

A2: All the products will be 100% checked before the shipment

Q3: When can I get the price?

A3: Usually we quote within 24 hours after we get your inquiry.

Q4: How could I get a sample?

A4: if you can not buy our product in your local area, we will ship a sample to you. You will be charged a sample price plus all related shipping costs. Express delivery charge depends on the quantity of the samples.

Q5: What is the price of shipping?

A5: Depending upon the port of delivery, prices vary.

Any more query please contact with us, thank you!



Guangzhou Golden Electric Co., Ltd.



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,
Guangzhou city, Guangdong province, China