




Welded Technique 25-75mm² Portable Grounding Rod with Earth Clamp and Earth Wire

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Model Number: Jdb-J190
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month

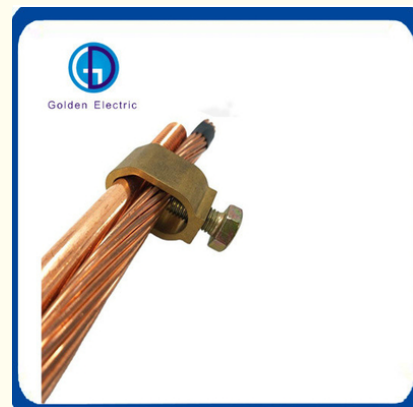

Product Specification

- Item: Grounding Rod With Earth Clamp And Earth Wire
- Material: Copper Layer And Steel Core
- Copper Layer Thickness: $\geq 0.254\text{mm}$
- Purity Of Copper: $\geq 99.95\%$
- Tensile Strength: $\geq 580\text{nm/mm}$
- Straightness Error: $\leq 1\text{mm/M}$
- Service Life: ≥ 50 Years
- Diameter: 14.2mm~25mm; (5/8, 3/4)
- Length: 1.2m~3.0m(4FT~10FT)
- Certification: ISO9001: 2008
- Transport Package: Ocean Freight Woven Belt+Iron Pallet+Container
- Specification: Different Sizes And Specifications
- Trademark: Golden Electric Or Customize



More Images



for more products please visit us on chinagoldene.com

Product Description

Company

Profile

GoldenElectricCo., Ltd.

is professional make of Electrical products .Such as distribution box, waterproof plug, socket, wall switch, waterproof plastic ,Aluminum box ,Changeover Switch and disconnecting switch,MC4 Connector.isolator switch.fusebreaker.distribution box,PV combiner box .surge protector, Indicatorlamp,Solar Charge Controller,Industrialplugandsocket,BusbarInsulator,Meter Socket,Wind Turbine, Terminal Block,Solar product and so on. all products comply with IEC, A S/NZS standard. passed CE, IP66, ROHS certificates.at present we have exported to many countries and have serve these customers with professional electrical solution.

Product Description

Item	Grounding Rod With Earth Clamp And Earth Wire
Material	Copper Layer & Steel Core
Copper Layer Thickness	$\geq 0.254\text{mm}$ or As Your Request
Tensile Strength	$\geq 580\text{Nm/mm}$
Straightness Error	$\leq 1\text{mm/m}$
Service Life	≥ 50 Years
Function	Connect with grounding, disperse the lightning
Type	Threaded or plat or pointed
Available service mode	OEM; ODM
Certification	ISO9001:2008





Golden Electric



Golden Electric





Golden Electric



Golden Electric






Golden Electric



Products Details

Grounding Rod With Earth Clamp And Earth Wire are widely used in power plants, substation, transmission line tower, communication base stations, airports, railways, all kinds of high-rise buildings, microwave relay station, the network computer room, grounding, oil refinery, oil depots and other places to anti-static grounding, protective grounding, working, etc.

In recent years, accidents caused by grounding device faults increased day by day among enterprises of petroleum, electricity, communication and so on, so that great importance was attached to reliability, stability and service life of grounding devices. Therefore, electroforming copper cladding steel gradually substituted the traditional hot galvanized steel and hot fusion welding by right of its advantages of good conductivity performance, strong decay resistance, great tensile strength.

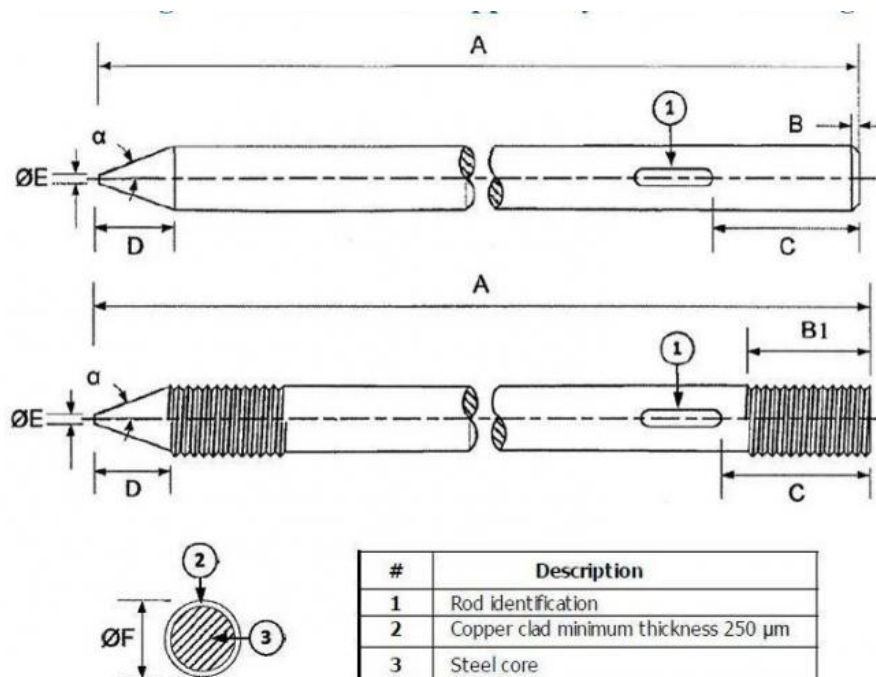

F(mm)	A(mm)	B(mm)	B1(mm)	C(mm)	D(mm)	E(mm)	a°
7	1000~3000	2 \pm 2%	25 \pm 5	150 \pm 50	10~12	\leq 5	27.5 \pm 2.5
8	1000~3000	2 \pm 2%	25 \pm 5	150 \pm 50	10~12	\leq 5	27.5 \pm 2.5
10	1000~3000	2 \pm 2%	25 \pm 5	150 \pm 50	10~12	\leq 5	27.5 \pm 2.5

12	1000~3000	2±2%	25±5	150±50	10~12	≤5	27.5±2.5
12.5(1/2")	1000~3000	2±2%	25±5	150±50	10~12	≤5	27.5±2.5
14	1000~3000	2±2%	25±5	150±50	10~12	≤5	27.5±2.5
14.2(5/8")	1000~3000	2±2%	25±5	150±50	10~12	≤5	27.5±2.5
16	1000~3000	2±2%	25±5	150±50	10~12	≤5	27.5±2.5
17.2(3/4")	1000~3000	2±2%	25±5	150±50	10~12	≤5	27.5±2.5
18	1000~3000	2±2%	25±5	150±50	10~12	≤5	27.5±2.5
20	1000~3000	2±2%	25±5	150±50	10~12	≤5	27.5±2.5
22	1000~3000	2±2%	25±5	150±50	10~12	≤5	27.5±2.5
25	1000~3000	2±2%	25±5	150±50	10~12	≤5	27.5±2.5

- 1) The purity of the copper which used as cladding is more than 99.95%.
- 2) The steel core is low carbon steel which the carbon content is about 0.15%.
- 3) The copper bonded ground rod will be capable of being through 90 at a maximum radius of 100mm with no copper fracture and with no ill effect on the bond between the steel and the copper cladding.
- 4) Good in anticorrosion that usage-life is more than 50 years, constant low resistance and good plasticity which has the characteristics of the pure copper.
- 5) The ground rod is fully covered with copper cladding without any cracks, holes, cavities etc. Preventing exposure of the steel core to soil and moisture, so as to form a good corrosion resistance.


Products Category



Plastic Iron Steel Base Distribution Box



Buabsr AM Typr Standoff Composite Insulator

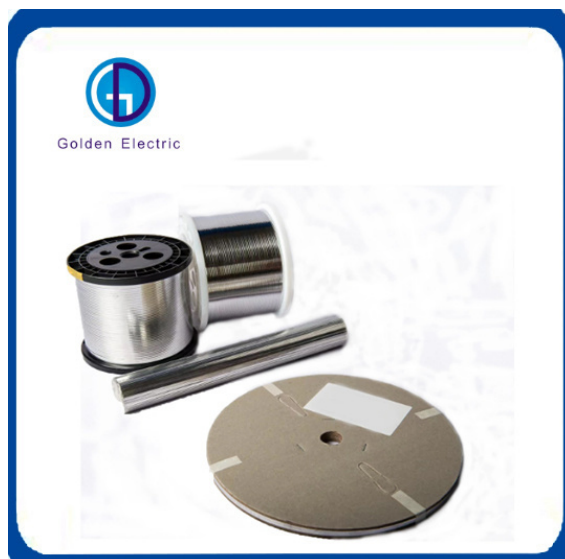

Cuttable PV Round Buabsr Solar PV Ribbon



24 Hours Programmable Digital Timer

Switch

FAQ

Q1: Are you a factory or trading company

A1: We are a factory, we can guarantee our price is first-hand, very cheap and competitive.

Q2: How does your factory do regarding quality control?

A2: All the products will be 100% checked before the shipment

Q3: When can I get the price?

A3: Usually we quote within 24 hours after we get your inquiry.

Q4: How could I get a sample?

A4: if you can not buy our product in your local area, we will ship a sample to you. You will be charged a sample price plus all related shipping costs. Express delivery charge depends on the quantity of the samples.

Q5: What is the price of shipping?

A5: Depending upon the port of delivery, prices vary.

Any more query please contact with us, thank you!



Guangzhou Golden Electric Co., Ltd.



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,
Guangzhou city, Guangdong province, China