



22mm IP65 10A 1no Emergency Stop Button Green Plastic Fxby6 Self Recovery

Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month



Product Specification

- Product Name: Pushbutton Switch
- Material: PA66+Copper
- Color: Red Yellow Green Blue White Black
- Mounting Hole Size: 22mm Diameter
- Operation Type: Momentary
- Application: Machine
- Packing: 10PCS/Box
- Terminal Type: Screw Terminal
- Type: Supplies>>Switches>>Push Button Switches
- Transport Package: Ocean Freight Box Packing+Carton+Pallets
- Specification: Different Sizes And Specifications
- Trademark: Golden Electric Or Customize
- Origin: China
- HS Code: 8536200000
- Supply Ability: 5000/Month



More Images



Our Product Introduction

for more products please visit us on chinagoldene.com

Product Description

Company

Profile

GoldenElectricCo., Ltd.

is professional make of Electrical products .Such as distribution box, waterproof plug, socket, wall switch, waterproof plastic ,Aluminum box ,Changeover Switch and disconnecting switch,MC4 Connector.isolator switch.fusebreaker.distribution box,PV combiner box .surge protector, Indicatorlamp,Solar Charge Controller,Industrialplugandsocket,BusbarInsulator,Meter Socket,Wind Turbine, Terminal Block,Solar product and so on. all products comply with IEC, A S/NZS standard. passed CE, IP66, ROHS certificates.at present we have exported to many countries and have serve these customers with professional electrical solution

Product Description

Operating abient temperature	-20°C~+55°C(Noicing)
Operating abient humidity	45~85°C(No condensation)
Storge ambient temperature	-45~+80°C
Storage ambient humidity	Below 95°CRH
Protection Level	front of the panel :IP65 (IEC 60529) Terminal :IP20(IEC60529)
Insulation Resistance	100MQ Above (500V DC Megohmmeter)
Withstand voltage	Contact Block:2500VAC 1min Indiactor Light 2000VAC 1min
Vibration resistance	Emergency stop switch Mistake action :10~500Hz Single -amplitude 0.35mm Acceleerat ion50m/s2 indicator light pushbutton switch iluminated pushbutton switch,selector switches and key selector switches Mistake action :5~55Hz Single -amplitude 0.5mm Durability :30Hz Single -amplitude 1.5mm
Impact resistance	Emergency stop switch Mistake action :150m/2 Durability :1000m/s2 Indicator Light, pushbutton switches ,selector switches ,key Selector switch Mistake action :100m/2 Durability :1000m/s2
Mechanical Lifetime	Emergency Stop switch:250000times (Single -contact only Push button switch ,iluminated push button switch Self-replicating type :5million times (Single -contact) 1 million times (Double contact) Self-locking type :250000 times (Single -contact) 100000 times (Double contact) Slelctor switch ,Key selector switch :250000 times (Single contact) 10 Othousand times (Double contact)
Electrical Lifetime	Emergency stop switch :100000 times (Single contact only) Pushbutton switches ,selector, key selector switches : 100000 times (Single -contact) 50000 times (Double contact)



Golden Electric



Golden Electric





Golden Electric



Golden Electric





Golden Electric



Golden Electric



Products Details

EXHIBITION OF WORKMANSHIP

SELECTED MATERIAL QUALITY WORKMANSHIP TO PROVIDE EXCELLENT INDUSTRIAL PRODUCTS



6 COLORS FOR YOUR CHOICE

Button working mode for Momentary (Self-reset)

(Explanation: The product in the default normally open contact NO, when press the button, circuit conduction; When you release the hand, the button returns to its original state and the circuit is disconnected.

Product default is 1NO normally open contact

Normally open (NO) or normally closed (NC) contacts can be added.
(NO: Disconnect by default. NC: The default state is on-on.)

CONTACT INSTRUCTIONS

SILVER CONTACT

the contacts have good electric conduct performance




BLUE: NORMALLY OPEN

It is disconnected normally, and will be connected when you press.

RED: NORMALLY CLOSED

It is connected normally, and will be disconnected when you press.




Note: The 3.2mm groove is used to prevent rotation.
Not necessary when using markers and anti-rotation rings.

Component	A(mm)	B(mm)
Emergency stop switch	Above50	Above50
Pushbutton Switches	Above50	Above30
Selector Switches	0	0
Key Selector Switch		
Mushroom head shaped push button switch	Above50	Above40
Indicator Lamp(one -piece type)	Above30	Above30
Indicator Lamp (one -piece type)	Above50	Above30

When using a bulb with a power greater than 1W,a minimum spacing of 50mm should be maintained

PRODUCT DIMENSION

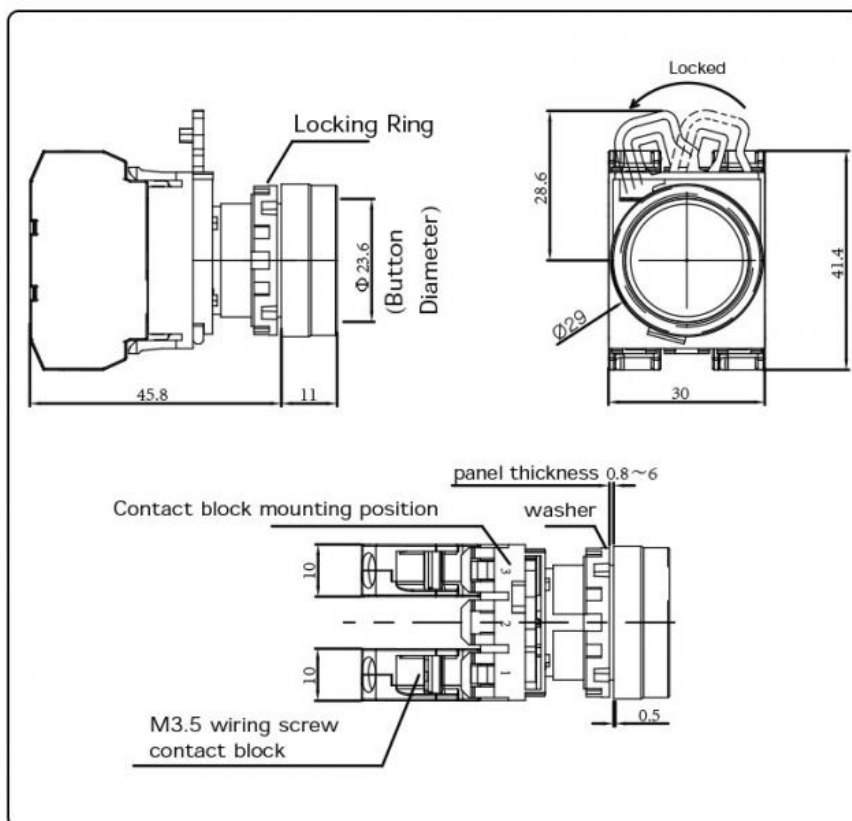



Ad Indicator Lamp LED Lamp Warning Lamp Single Lamp Power Fitting Copper Termination Lug High Conductor



Four Hole Earth Point Ground Plate



Multi-Function Wx -700b Automatic Wire Stripper

Packing & Delivery

Selling Units : Single item

Single package size : 10X10X5 cm

Single gross weight : 0:030 kg

Package Type : A box of 10PCS,,individually bagged

Lead time :

Quantity(pieces) 1 - 8000 >8000

Lead time (days) 15 To be negotiated

FAQ

Q1: Are you a factory or trading company

A1: We are a factory, we can guarantee our price is first-hand, very cheap and competitive.

Q2: How does your factory do regarding quality control?

A2: All the products will be 100% checked before the shipment

Q3: When can I get the price?

A3: Usually we quote within 24 hours after we get your inquiry.

Q4: How could I get a sample?

A4: if you can not buy our product in your local area, we will ship a sample to you. You will be charged a sample

price plus all related shipping costs. Express delivery charge depends on the quantity of the samples.

Q5: What is the price of shipping?

A5: Depending upon the port of delivery, prices vary.

Any more query please contact with us, thank you!



Guangzhou Golden Electric Co., Ltd.



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,
Guangzhou city,Guangdong province,China