

400VAC Plastic Waterproof 100 Amp Cut Out Fuse for Low Voltage **Systems**

Basic Information

- Place of Origin:
- Brand Name: Golden Electric /OEM

China

IATF16949


workdays

5000/Month

LC, T/T, PayPal, Western Union

1

- Certification:
- Minimum Order Quantity:
- Carton/Pallet · Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

Color:	White
Logo:	Accept Customized Logo
• MOQ:	250
• Package:	Cartons
• Feature:	High Performance
 Application: 	Industrial Control
 Transport Package: 	Ocean Freight Box Packing+Carton+Pallets
 Specification: 	Different Sizes And Specifications
 Trademark: 	Golden Electric Or Customize
Origin:	China
• HS Code:	8535100000
 Supply Ability: 	5000/Month
• Usage:	Low Voltage
• Туре:	DMC/Bakelite/Plastic

Cut Out



More Images

Model Number:



Company


Profile

GoldenElectricCo., Ltd.

is professional make of Electrical products .Such as distribution box, waterproof plug, socket, wall switch, waterproof plastic ,Aluminum box ,Changeover Switch and disconnecting switch,MC4 Connector.isolator switch.fusebreaker.distribution box,PV combiner box .surge protector, Indicatorlamp,Solar Charge Controller,Industrialplugandsocket,BusbarInsulator,Meter Socket,Wind Turbine, Terminal Block,Solar product and so on. all products comply with IEC, A S/NZS standard. passed CE, IP66, ROHS certificates.at present we have exported to many countries and have serve these customers with professional electrical solution

Product Description

Technical data	
Product Name	CUT OUT waterproof house service fuse
Rated Volatge	400V AC
Rated Current	80/100A
Max.power dissipation of fuse links Pr	6W
Standard	IEC60269-3

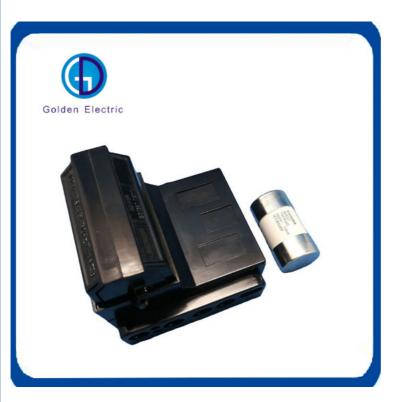









Products Details

1.Use of the product :

The product is used as a fuse-holder for a(22x57) b(30x57) fuse-links in line protection up to AC500V

2.Features:

HRC100 consists of a base and a carrier . The outer casing is made of engineering plastics with good mechanical properties and flame retardant effects . The copper parts are made of pure copper and copper alloy with good electrical conductivity . Spring-mounted contacts for better contact and lower temperature rise .

3.Normal working environment

(1) Ambient temperature

The upper ambient temperature does not exceed 40° C,the lower limit does not exceed -5° C (2)Atmospheric conditions

The air is clean.Relative humidity does not exceed 50% when the ambient temperature is 40° C. Higher relative humidity at lower temperatures . Note the condensation that may occur under these conditions .

(3) Altitude

The altitude of the installation site does not exceed 2000m .



Plastic Digital Voltmeter LED Indiactor Light

Surface Mounted Waterproof Socket



FAQ

Q1: Are you a factory or trading company

A1: We are a factory, we can guarantee our price is first-hand, very cheap and competitive.

Q2: How does your factory do regarding quality control?

A2: All the products will be 100% checked before the shipment

Q3: When can I get the price?

A3:Usually we quote within 24 hours after we get your inquiry.

Q4: How could I get a sample?

A4: if you can not buy our product in your local area, we will ship a sample to you. You will be charged a sample price plus all related shipping costs. Express delivery charge depends on the quantity of the samples.

Q5: What is the price of shipping?

A5: Depending upon the port of delivery, prices vary.

Any more query please contact with us, thank you!

