



Mc4 Connector PV Array DC Isolator Switch for Upside Input Wiring and Plug-In Run

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Golden Electric /OEM
- Certification: ISO 9001, ISO 9000, ISO 14001, ISO 14000, ISO 20000, OHSAS/ OHSMS 18001, IATF16949
- Minimum Order Quantity: 1
- Packaging Details: Carton/Pallet
- Delivery Time: Peak Season Lead Time: more than 12 months
Off Season Lead Time: within 15 workdays
- Payment Terms: LC, T/T, PayPal, Western Union
- Supply Ability: 5000/Month



Product Specification

- Features: With 4 Mc4 Connector
- Model NO.: GD32R-4S(4 MC4)
- Grounding: Un Grounded
- Run: Plug-In
- Switching Mode: Single Throw-in
- Structure Of Operating: Manual
- Brand: Golden Electric /OEM
- Product Name: DC Isolator Switch
- Waterproof: IP66
- Current: 16A, 25A, 32A
- Wiring: Upside Input, Downside Output
- Working Temperature: -5 To +60 Degree Celsius
- Rated Insulation Voltage: 1500V
- Tightening Torque Terminal 1.2-1.8nm
Screws M4:



More Images



for more products please visit us on chinagoldene.com

Product Description

Product Description

Modular design, DC insulation voltage 1500V, compact structure, 2-8 Pole optional
 IP66 box design, switch rotation operator with three lockable positions, to prevent misoperation
 Suitable for different specifications of waterproof cable connector or MC4 connector
 The zero line bridge with Angle design makes the connection easier
 With sufficient internal space and good heat dissipation effect, the whole machine can work under -40°C-70°C with full load
 High - speed "on - off" switching mechanism, using energy storage spring, fast switching, maximum switching time is less than 5ms
 Contact self-cleaning design, reduce the resistance and energy consumption of DC switch, extend the life of switch
 Magnetic arc extinguishing and gate arc extinguishing are used to suppress the arc effectively
 Passed IEC/EN60947-3:2009+A1+A2, GB/T14048.3, with TUV, CE certification

Product Features



1. Non-polar design
2. Modular design, 2-8 grades available models
3. Positive contact, negative contact optional
4. Various installation methods such as single-hole installation, panel installation, power distribution installation, door lock installation, and external installation are optional
4. Using imported seals, the installation can make the whole machine reach IP66 level
5. The design of rated insulation voltage of 1500V has passed IEC/EN60947-3:2009+A1+A2, AS60947.3, UL508I, testing and TUV, CE, CB, SAA, UL and other international certifications

Product Parameters

The following data are according to IEC/EN60947-3:2009+A1+A2, AS60947.3, UL508I, GB/T14048.3, use category DC-PV2/DC-PV1


The main parameters		GD32R-4S		
Rated insulation voltage(Ui)		1500V		
Rated thermal current(Ith)		16A	25A	32A
Rated impulse withstand voltage(Uimp)		8000V		
Rated short-time withstand current (1s)(Icw)	2,4,6,8	800A	900A	1000A
	2H,3H,4H	1300V	1500V	1700V
Rated short-circuit making capacity(Icm)	2,4,6,8	800A	900A	1000A
	2H,3H,4H	1300V	1500V	1700V
Rated limited short-circuit current(Icc)		5000A		
Maximum fuse size gL(gG)		40A	63A	80A
Maximum cable cross-section (including jumper wires)				
single wire or standard		4-16mm ²		
Flexible		4-10mm ²		
Flexible (+ multicore cable end)		4-10mm ²		
Torque				
Tightening torque of terminal M4 screw		1.2-1.8Nm		
Panel Mounting Screw ST4.2 (304 Stainless Steel)		0.8-0.9Nm		
Tightening Torque				
Tightening torque for single hole mounting nut M16		2.0-2.5Nm		
Tightening torque of knob M3 screw		0.5-0.7Nm		

Switching torque	0.9-1.9Nm		
Screw torque	1.5-2.0Nm		
Maximum power loss per contact pair			
2	0.8W	2W	3W
4	1.6W	4W	6W
6	2.4W	6W	9W
8	3.2W	8W	12W
2H	0.4W	1W	1.5W
3H	0.6W	1.5W	2.25W
4H	0.8W	2W	3W
General parameters			
Switch knob position	Close at 12 o'clock, open at 3 o'clock (optionally close at 9 o'clock, open at 12 o'clock)		
Mechanical life	10000		
Number of DC poles	2 or 4 (6/8 optional)		
Distance between contacts (between poles)	8mm		
Operating temperature	-40 to +85°C		
Storage temperature	-40 to +85°C		
Pollution level	2		
Overvoltage category	III		
IP rating of shaft and mounting screws	IP66		


Product Details

Dimensions


GD32R-4S

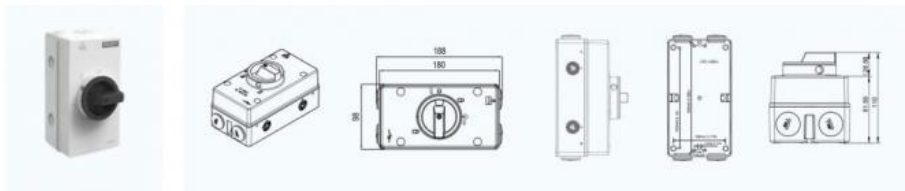


GD32R-4S M16

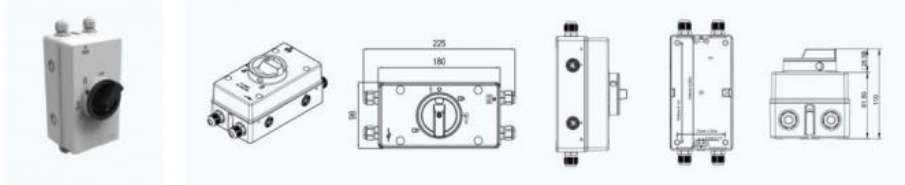


GD32R-4S M25

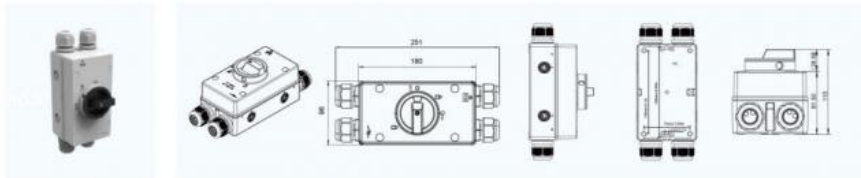

GD32R-4S (2MC4)

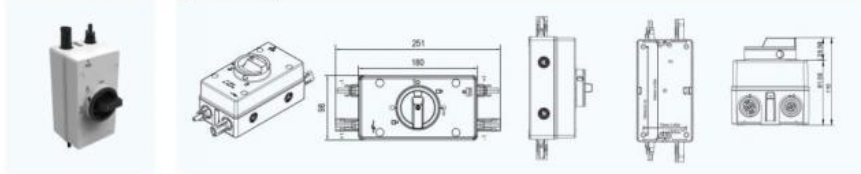

GD32R-4S (4MC4)

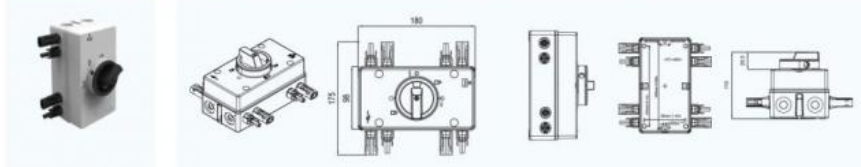

Recommand Product



FAQ

1) Q:How can i trust your company?

A:Golden electric is The top 10 manufacture in China -more than 350 Agents in local market and more than 100 foreign clients make OEM,ODM order from us,Golden electric is a big company, we have cooperation with LS, EKF the world-class companies. Our company over 100 employees, products pass CE,IEC,TUV,SAA, RCM, ROHS certificates.

2) Q:Your products?

A: Golden electric is factory for Isolator Switch, Automatic transfer switch, Surge protector device, distribution box Enclosure, inverter, DC fuse etc. Providing customers very competitive sources, and can be your sourcing agent in China. Goods are following international standards, IE, CE, ISO9001 ,SGS etc.

3) Q: After Sales Service?

A: We will provide the best After-sales Service

4) Q: What's the payment term?

A: Normally 100% T/T in advanced payment. If big order then about 50% advanced payment, balance before shipment. PAYPAL, WESTERN UNION, CASH for small order.

5) Q: Your address ?

A: Locates in Guangzhou province, China, welcome to visit us

6) Q:What's your contact information ?

Send your Inquiry Details in the Below, Click "send" Now!! We will do our best to give you a perfect service.



Guangzhou Golden Electric Co., Ltd.



008618998498109



eva@china-golden.com.cn



chinagoldene.com

Building 4, Self-edited Building, No. 728, Kaichuang Avenue, Yunpu Industrial Zone, Huangpu District,
Guangzhou city, Guangdong province, China